

## Photo DMOS-FET Relay

### Description

The **LTU520** is a 1-From A and 1-Form B solid state relay in a 8 pin DIP package that employs optically coupled MOSFET technology to provide 3750V of input to output isolation. The optically coupled input is controlled by a highly efficient GaAlAs infrared LED and MOS FETs on the output side.


### Features

- Low driver power requirements (TTL/CMOS Compatible)
- No moving parts
- High reliability
- Arc-Free with no snubbing circuits
- 3750Vrms Input/Output isolation

### Applications

- Telecommunications (PC, Electronic notepad)
- Measuring and Testing equipment
- Industrial control
- Security equipments
- High speed inspection machine

### Outline Dimensions

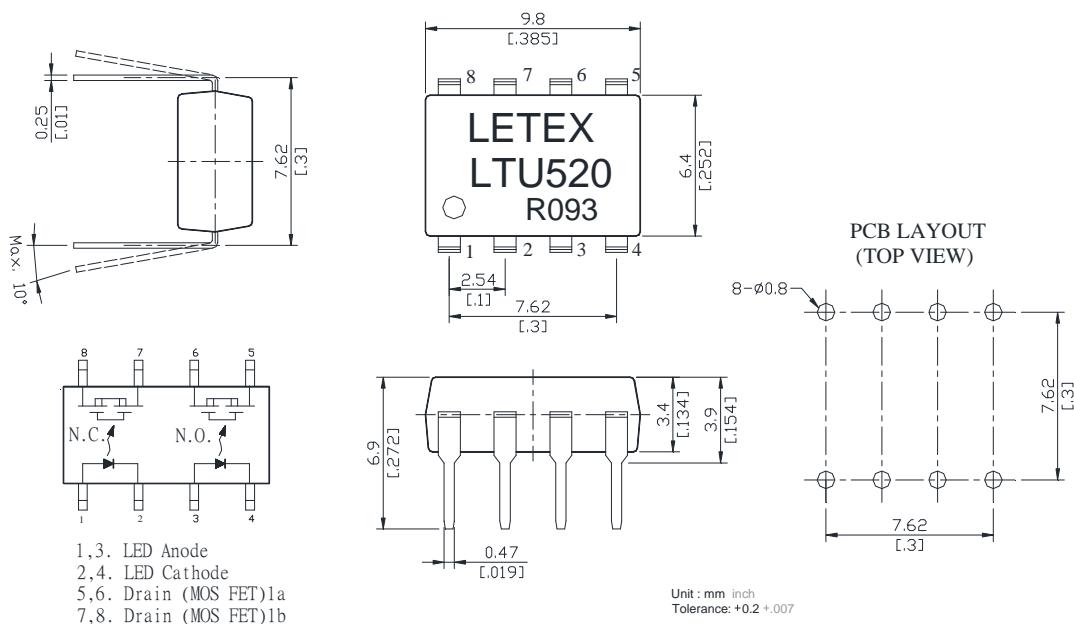

# Photo DMOS-FET Relay Specifications

Part Name: LTU520

Absolute Maximum Ratings (Ambient Temperature: 25°C)

Item	Symbol	Value	Units	Note
Input	Continuous LED Current	IF	50	mA
	Peak LED Current	IFP	1000	mA
	LED Reverse Voltage	VR	5	V
	Input Power Dissipation	PIn	75	mW
Output	Load Voltage	VL	400	V(AC peak or DC)
	Load Current	IL	120	mA
	Peak Load Current	IPeak	0.6	A
	Output Power Dissipation	Pout	450	mW
Total Power Dissipation	PT	500	mW	
I/O Breakdown Voltage	VI/O	3750	Vrms	RH=60%, 1min
Operating Temperature	TOper	-40 to +85	-40 to +85	
Storage Temperature	TStg	-40 to +100	-40 to +100	
Pin Soldering Temperature	TSol	260	260	10 sec max.

Electrical Specifications (Ambient Temperature: 25°C)

Item	Symbol	MIN.	TYP.	MAX.	Units	Conditions		
Input	LED Forward Voltage	V <sub>F</sub>		1.2	1.5	V		
	Operation LED Current	I <sub>F On</sub>		0.5	5.0	mA		
	Recovery LED Current	I <sub>F Off</sub>		0.35	0.5	mA		
	Recovery LED Voltage	V <sub>F Off</sub>	0.5			V		
Output	On-Resistance	R <sub>on</sub>		20(N.O.)	30(N.O.)	$I_F=5\text{mA}$ (N.O.) $I_F=0\text{mA}$ (N.C) $I_L=100\text{mA}$ Time to flow is within 1 sec.		
				20(N.C.)	50(N.C.)			
	Off-State Leakage Current	I <sub>Leak</sub>		1(N.O.)	uA	$I_F=0\text{mA}$ (N.O.) $I_F=5\text{mA}$ (N.C) $V_L=$ Rating		
	Output Capacitance	C <sub>Out</sub>		150		$I_F=5\text{mA}, V_L=0,$ $f=1\text{MHz}$		
Transmission	Turn-On Time	T <sub>On</sub>		0.23(N.O.)	0.5(N.O.)	ms	$I_F=5\text{mA}, I_L=50\text{mA}$	
				0.2(N.C.)	1.0(N.C.)			
	Turn-Off Time	T <sub>off</sub>		0.03(N.O.)	0.2(N.O.)	ms		
				0.5(N.C.)	3.0(N.C.)			
Coupled	I/O Isolation Resistance	R <sub>I/O</sub>	$10^{10}$		$\Omega$	DC500V		
	I/O Capacitance	C <sub>I/O</sub>		0.8	pF	$f=1\text{MHz}$		



## Reference Data

