

# Photointerrupter

## Model No: LBT-130-1


### Features

- High sensing accuracy (Slit width: 1.0 mm)
- PWB direct mounting type package

### Applications

- Copiers, printers, facsimiles
- Optoelectronic switches

### Outline Dimensions

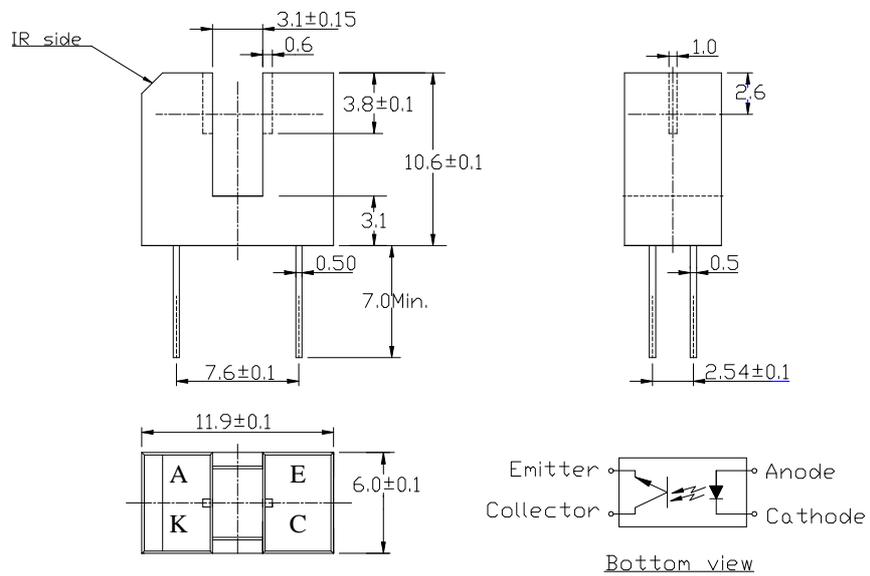

## Absolute Maximum Ratings (Ambient Temperature: 25°C)

Item		Symbol	Rating	Units	Note
Input	Forward current	I <sub>F</sub>	50	mA	
	Reverse voltage	V <sub>R</sub>	5	V	
	Power dissipation	P <sub>D</sub>	75	mW	
Output	Collector-emitter voltage	V <sub>ceo</sub>	30	V	
	Emitter-collector voltage	V <sub>eco</sub>	4.5	V	
	Collector power dissipation	P <sub>C</sub>	80	mW	
Storage Temperature		T <sub>stg</sub>	-40 to +100	°C	
Operating Temperature		T <sub>op</sub>	-25 to +85	°C	
Soldering Temperature		T <sub>sol</sub>	260	°C	10 seconds max.

## Electrical Specifications (Ambient Temperature: 25°C)

Item		Symbol	Min.	Typ.	Max.	Units	Conditions
Input	Forward voltage	V <sub>F</sub>		1.2	1.4	V	I <sub>F</sub> =20mA
	Peak forward voltage	V <sub>FM</sub>		3	4	V	I <sub>FM</sub> =0.5A
	Reverse current	I <sub>R</sub>			10	μA	V <sub>R</sub> =5V
Output	Collector dark current	I <sub>ceo</sub>			0.5	μA	V <sub>ce</sub> =10V
	Collector-emitter breakdown voltage	BV <sub>ceo</sub>	30			V	I <sub>ce</sub> =50μA
	Emitter-collector breakdown voltage	BV <sub>eco</sub>	4.5			V	I <sub>ec</sub> =50μA
Combination	Collector current	I <sub>c</sub>	0.5			mA	V <sub>ce</sub> =5V, I <sub>F</sub> =20mA
	Collector-emitter saturation voltage	V <sub>ce(sat)</sub>			0.4	V	I <sub>F</sub> =20mA, I <sub>c</sub> =0.3mA
	Response time	T <sub>r</sub> /t <sub>f</sub>	10			μs	I <sub>F</sub> =5mA, V <sub>cc</sub> =5V, R <sub>L</sub> =100Ω

# Reference Data

