



**BRIGHTTEK**  
**BRIGHTTEK (EUROPE) LIMITED**

*Brighten up The World With LED!*



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

## PRODUCT DATASHEET




- ▶ PTH Lamp
- ▶ 3mm Cylindrical 3.8t
- ▶ Amber (605nm)

N0A16L92R (Bulk)  
N0A16L92RT (Taping)



Release Date: 22 September 2015 Version: A1.1

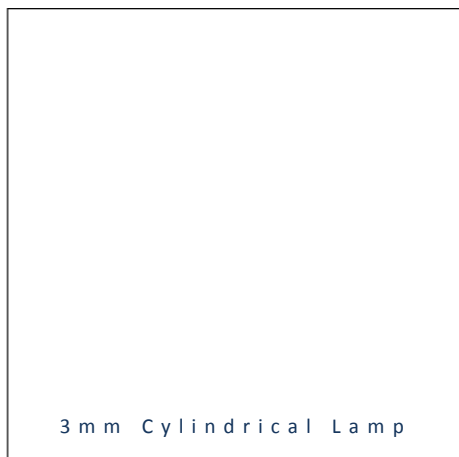

### APPLICATIONS:

- Indicator
- Switch
- Signal Light

## 3mm Cylindrical Lamp



**RoHS**  
Compliant

### FEATURES:

- **Package:** PTH Lamp 3mm Cylindrical 3.8t
- **Forward Current:** 20mA
- **Forward Voltage (typ.):** 2.0V
- **Luminous Intensity (typ.):** 165mcd@20mA
- **Colour:** Amber
- **Wavelength:** 605nm
- **Viewing angle:** 160°
- **Materials:**
  - Die: AlInGaP
  - Resin: Epoxy (Amber Diffused)
- **Operating Temperature:** -40~+85°C
- **Storage Temperature:** -40~+100°C
- **Grouping parameters:**
  - Forward voltage
  - Luminous intensity
  - Wavelength
- **Soldering methods:** Hand; Wave Soldering (DIP)
- **Preconditioning:** acc. to JEDEC Level 3
- **Packing:** 500pcs/Bulk; 2000pcs/Taping

## CHARACTERISTICS:

### Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Forward Current	$I_F$	30	mA
Peak Forward Current Duty 1/10@1KHz	$I_{FP}$	100	mA
Reverse Current @5V	$I_R$	10	$\mu A$
Power Dissipation	$P_D$	85	mW
Operating Temperature	$T_{OPR}$	-40~+85	°C
Storage Temperature	$T_{STG}$	-40~+100	°C

### Electrical & Optical Characteristics (Ta=25°C)


Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	$V_F$	1.8	2.0	2.4	V	$I_F=20mA$
Luminous Intensity	$I_V$	100	165	280	mcd	$I_F=20mA$
Dominant Wavelength	$\lambda_D$	600	605	610	nm	$I_F=20mA$
Peak Wavelength	$\lambda_P$	---	610	---	nm	$I_F=20mA$
Spectral Line H-Width	$\Delta\lambda$	---	15	---	nm	$I_F=20mA$
Viewing Angle	$2\theta_{1/2}$	---	160	---	deg	$I_F=20mA$

1. Luminous intensity ( $I_V$ )  $\pm 15\%$ , Forward Voltage ( $V_F$ )  $\pm 0.1V$
- 2.



## OUTLINE DIMENSION:

Package Dimension:

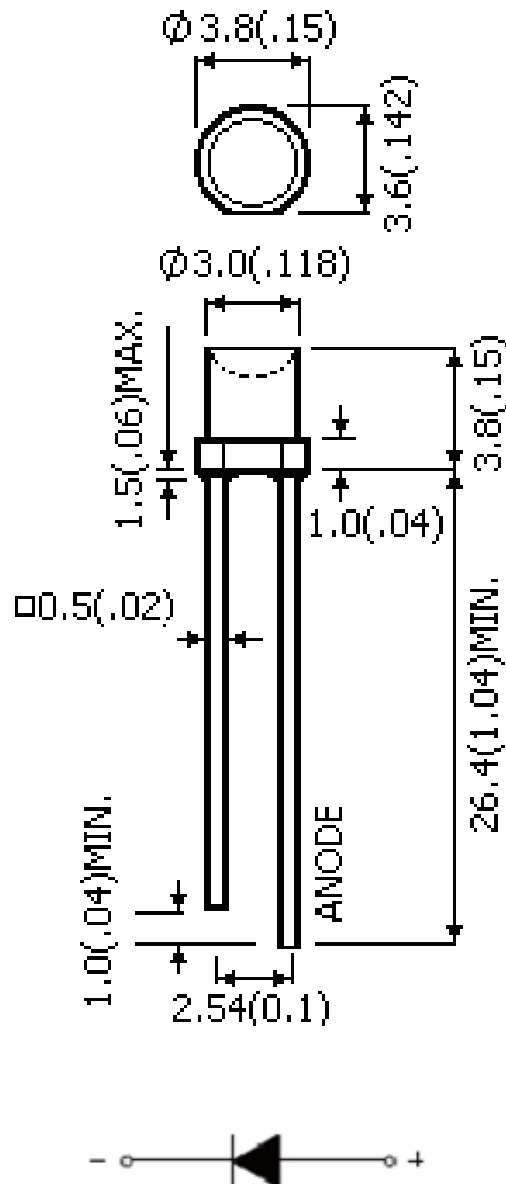

1. All dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.25\text{mm}$ , unless otherwise noted.

## BINNING GROUPS:

---

Forward Voltage Classifications ( $I_F = 20\text{mA}$ ):

Code	Min.	Max.	Unit
V18	1.8	2.4	V

Luminous Intensity Classifications ( $I_F = 20\text{mA}$ ):


Code	Min.	Max.	Unit
L100	100	280	mcd

Wavelength Classifications ( $I_F = 20\text{mA}$ ):


Code	Min.	Max.	Unit
A600	600	605	nm
A605	605	610	

## ELECTRO-OPTICAL CHARACTERISTICS:


Relative Intensity v.s. Forward Current

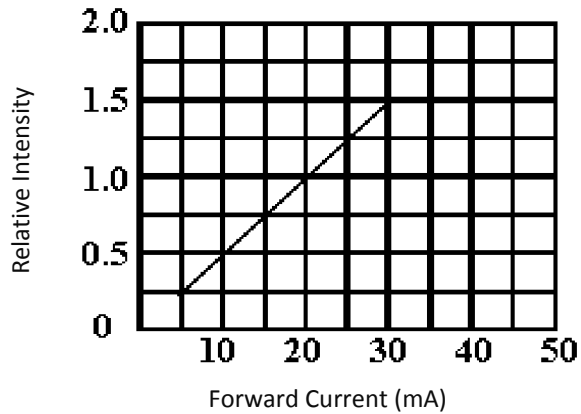


Forward Current v.s. Forward Voltage

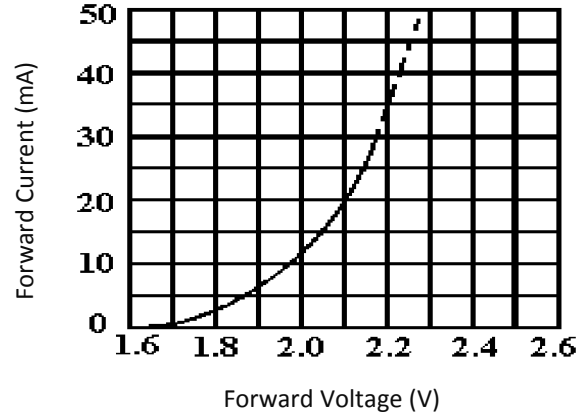


Relative Intensity v.s. Temperature

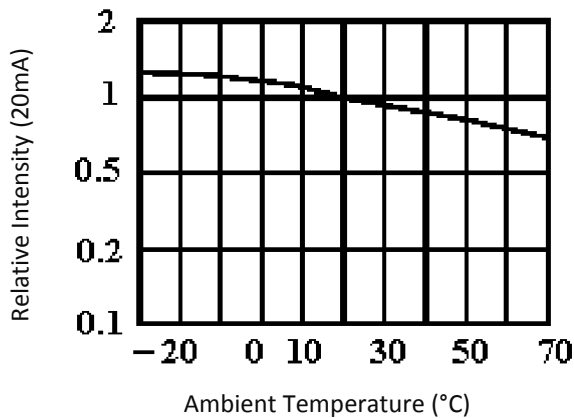

Forward Current v.s. Temperature

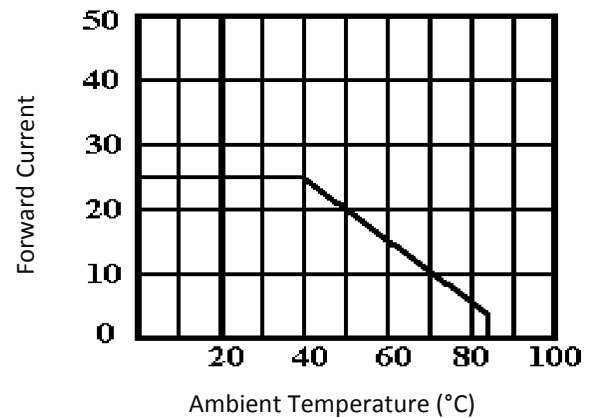

Relative Intensity v.s. Wavelength

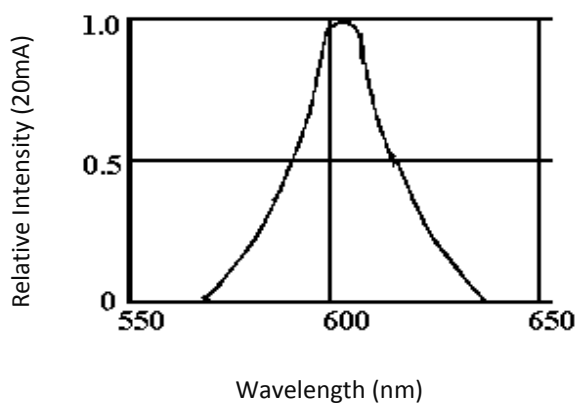




## RECOMMENDED SOLDERING PROFILE:

---

Hand Solder (Solder Iron):

- Temperature at tip of iron: 300°C Max. (25W Max.).
- Soldering Time: 3 seconds  $\pm$  1 sec.
- Maximum reflow soldering: 1 time.

Wave / Soldering Heat (DIP):

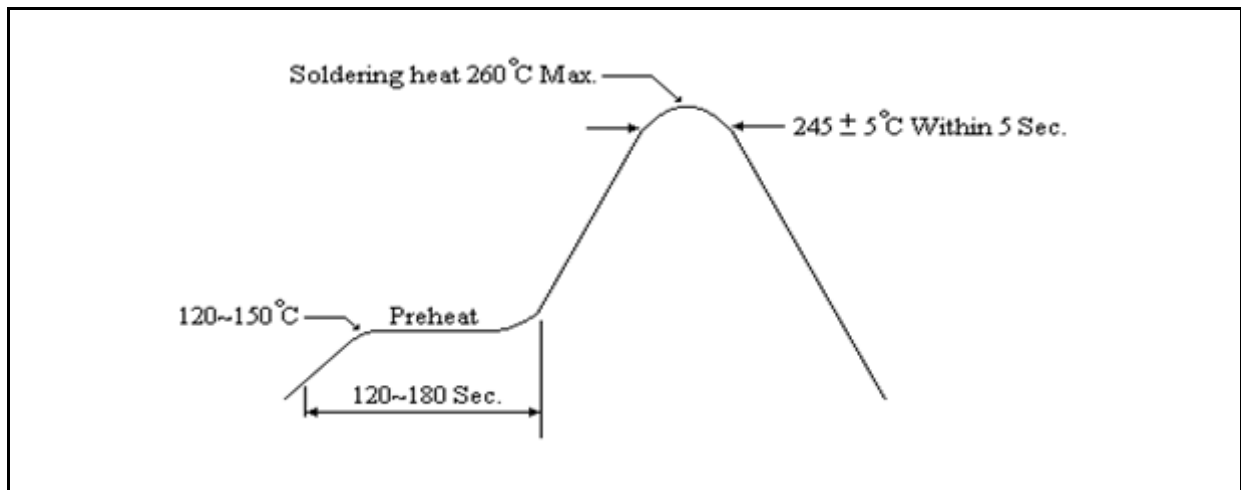

Note:

1. Maximum reflow soldering: 1 time.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.




## PACKING SPECIFICATION:


---

Reel Dimension:

500pcs/Bulk

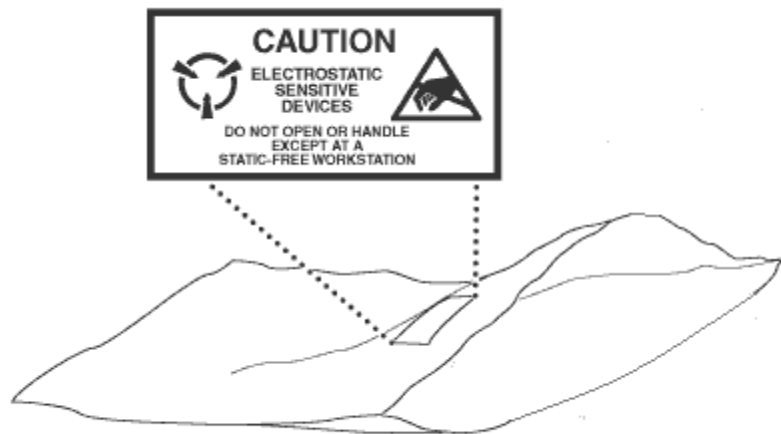

2000pcs/Taping

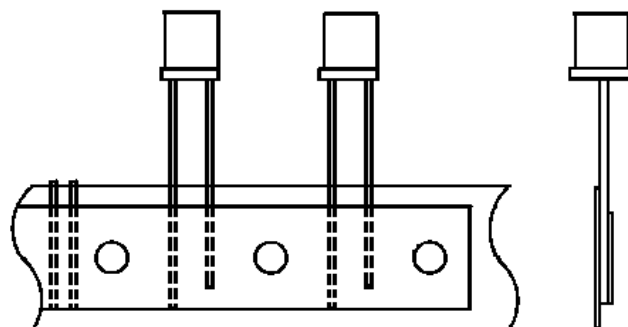

## PRECAUTIONS OF USE:

---

### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 month at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccant agent and apply baking at 60°C±5°C for 15hrs before use.

### Baking:


It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs.

The suggested baking conditions are as follows:

- 70±3°C x 24hrs and <5%RH, taped / reel package.
- 100±3°C x 2hrs, bulk (loose) package.
- 130±3°C x 30min, bulk (loose) package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

### Testing Circuit:

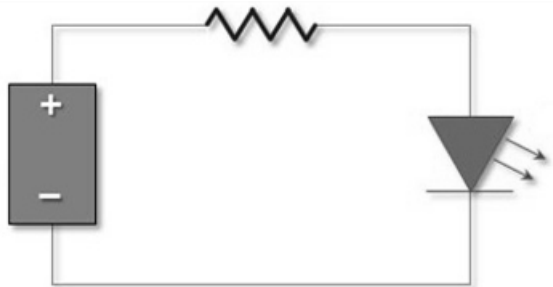

Must apply resistor(s) for protection (over current proof).

### Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.



**REVISION RECORD:**

---

Version	Date	Summary of Revision
A1.0	04/08/2015	Datasheet set-up.
A1.1	21/09/2015	Update solder profile.