



BRIGHTTEK

BRIGHTTEK (EUROPE) LIMITED

Brighten up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

PRODUCT DATASHEET



- ▶ PLCC2 SMD
- ▶ 2835 0.8t Series
- ▶ Warm White (2800K)

NOW04S12



Release Date: 31 March 2015 Version: A1.0



2835 0.8t Series

2835 0.8t Series

RoHS
Compliant



FEATURES:

- **Package:** PLCC2 White SMD Package
- **Forward Current:** 60mA
- **Forward Voltage (typ.):** 3.1V
- **Luminous Flux (typ.):** 19lm@60mA
- **Colour:** Warm White
- **Colour Temperature (CCT):** 2800K
- **Viewing angle:** 120°
- **Materials:**
 - Die: InGaN
 - Resin: Silicon (Yellow Diffused)
 - L/T Finish: Ag plated
- **Operating Temperature:** -40~+80°C
- **Storage Temperature:** -40~+100°C
- **Grouping parameters:**
 - Forward Voltage
 - Luminous Flux
 - CIE Chromaticity
- **Soldering methods:** Reflow Soldering
- **Preconditioning:** MSL3 according to JEDEC
- **Packing:** 8mm tape with 4000/reel, ø180mm (7")

APPLICATIONS:

- General Lighting
- Portable Lighting
- Commercial Lighting
- Indoor Lighting
- Backlight for LCD

CHARACTERISTICS:

Absolute Maximum Characteristics (Ta=25°C)

| Parameter | Symbol | Ratings | Unit |
|--|-----------|-----------|---------|
| DC Forward Current | I_F | 100 | mA |
| Pulse Forward Current (Duty 1/10, width 0.1ms) | I_{PF} | 200 | mA |
| Reverse Current @5V | I_R | 10 | μA |
| Junction Temperature | T_j | 110 | °C |
| Operating Temperature | T_{OPR} | -40~+80 | °C |
| Storage Temperature | T_{STG} | -40~+100 | °C |
| Soldering Temperature | T_{SOL} | 260 | °C |
| Colour Rendering Index | CRI | 80 (typ.) | --- |

Electrical & Optical Characteristics (Ta=25°C)


| Parameter | Symbol | Values | | | Unit | Test Condition |
|--------------------------|-----------------|--------|--------|------|------|----------------|
| | | Min. | Typ. | Max. | | |
| Forward Voltage | V_F | 2.8 | 3.1 | 3.6 | V | $I_F=60mA$ |
| Luminous Flux | Φ_V | 18 | 19 | 24 | lm | $I_F=60mA$ |
| Chromaticity Coordinates | X | --- | 0.4398 | --- | --- | $I_F=60mA$ |
| | Y | --- | 0.4048 | --- | | |
| Colour Temperature | CCT | 2715 | 2870 | 3000 | K | $I_F=60mA$ |
| Viewing Angle | $2\theta_{1/2}$ | --- | 120 | --- | deg | $I_F=60mA$ |

1. Luminous flux (Φ_V) $\pm 10\%$, Forward Voltage (V_F) $\pm 0.1V$, Viewing angle($2\theta_{1/2}$) $\pm 5\%$, CRI ± 5
2. IS standard testing




OUTLINE DIMENSION:

Package Dimension:

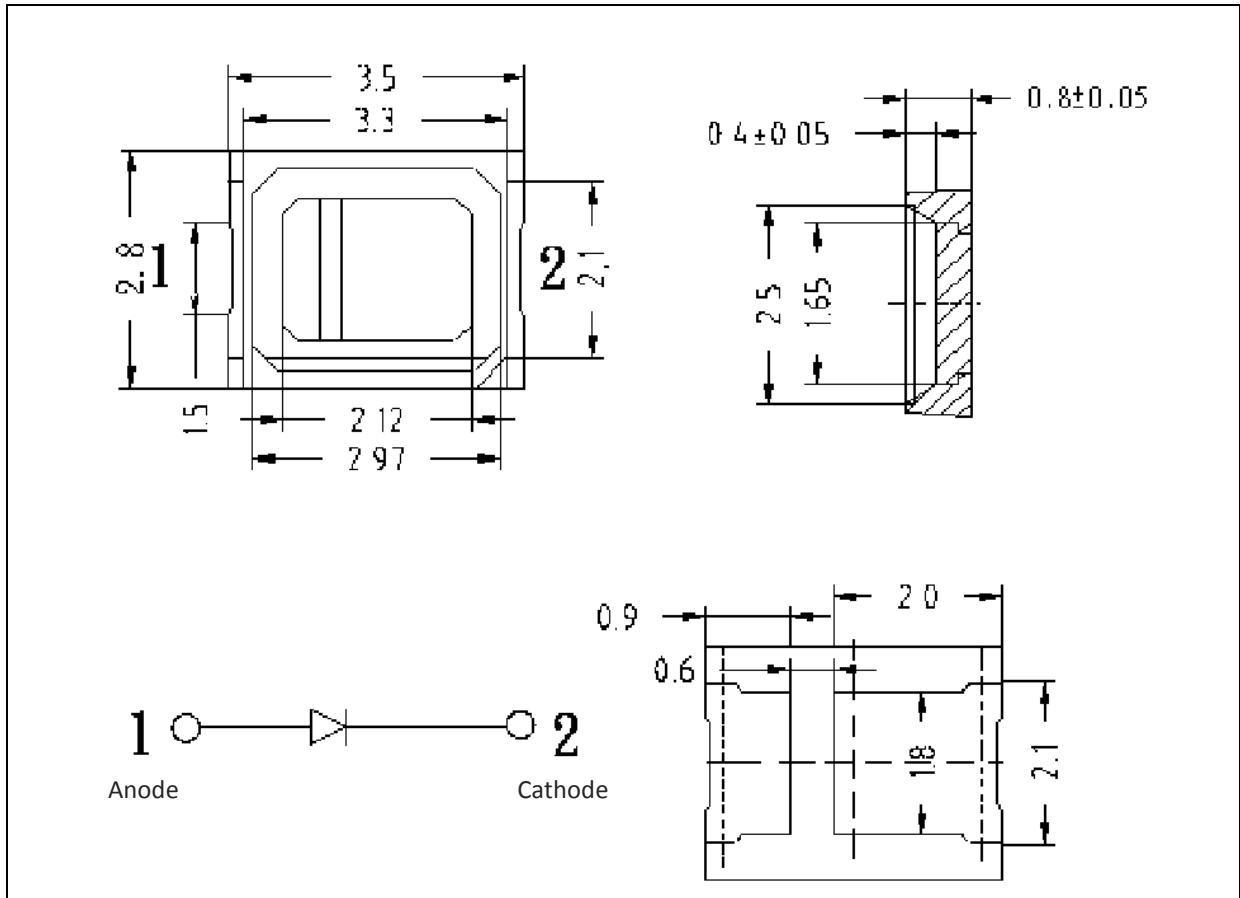

1. All dimensions are in millimetre (mm).
2. Tolerance $\pm 0.13\text{mm}$, unless otherwise noted.

Recommended Soldering Pad Dimension:

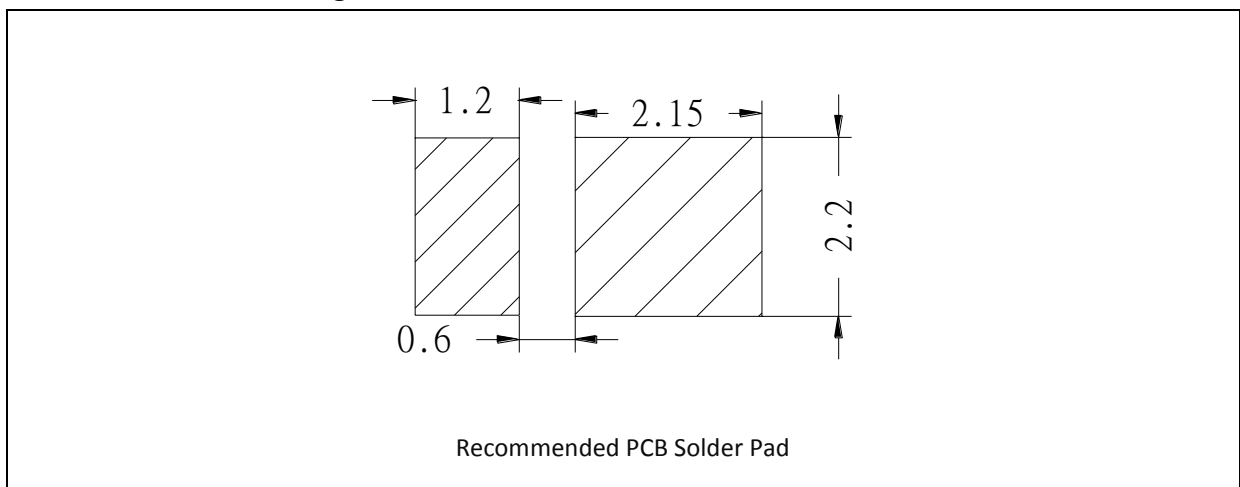

1. Dimensions are in millimetre (mm).
2. Tolerance $\pm 0.1\text{mm}$ with angle tolerance $\pm 0.5^\circ$.


BINNING GROUPS:

Forward Voltage Classifications ($I_F = 60\text{mA}$):

| Code | Min. | Max. | Unit |
|------|------|------|------|
| B | 2.8 | 2.9 | V |
| C | 2.9 | 3.0 | |
| D | 3.0 | 3.1 | |
| E | 3.1 | 3.2 | |
| F | 3.2 | 3.3 | |
| G | 3.3 | 3.4 | |
| H | 3.4 | 3.5 | |
| I | 3.5 | 3.6 | |

Luminous Flux Classifications ($I_F = 60\text{mA}$):


| Code | Min. | Max. | Unit |
|------|------|------|------|
| 15 | 18 | 20 | lm |
| 16 | 20 | 22 | |
| 17 | 22 | 24 | |

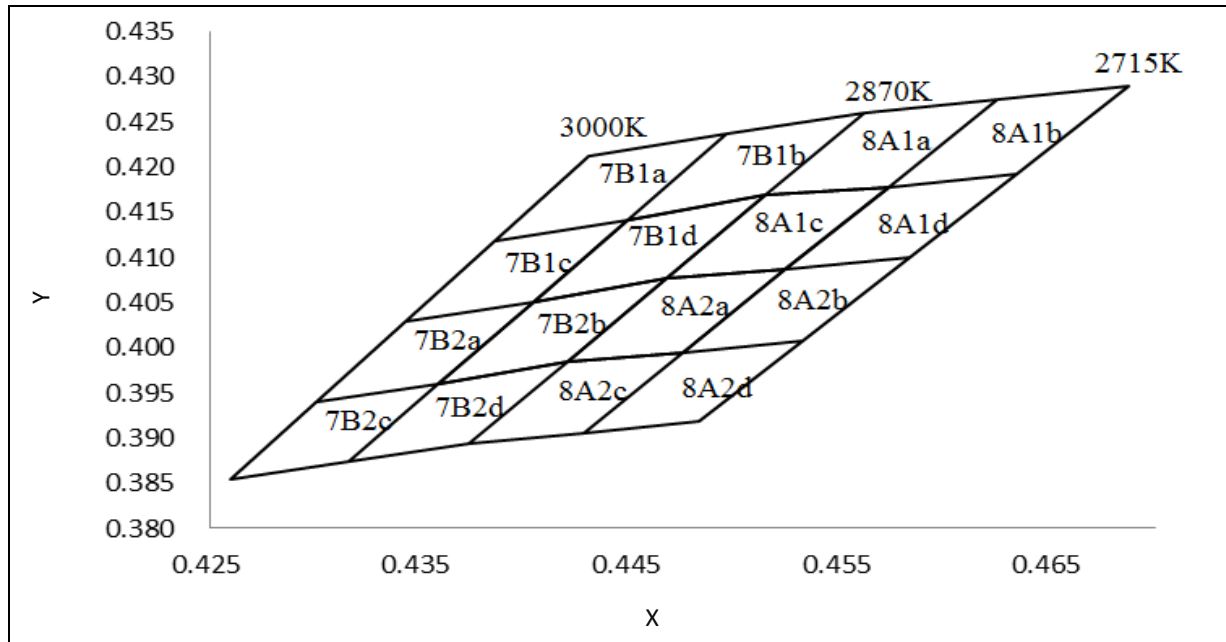**CIE CHROMATICITY DIAGRAM:**Chromaticity Coordinates Classifications ($I_F = 60\text{mA}$):


| | 1 | | 2 | | 3 | | 4 | |
|------|--------|--------|--------|--------|--------|--------|--------|--------|
| | X | Y | X | Y | X | Y | X | Y |
| 7B1a | 0.4496 | 0.4236 | 0.4431 | 0.4213 | 0.4386 | 0.4119 | 0.4449 | 0.4141 |
| 7B1b | 0.4562 | 0.4260 | 0.4496 | 0.4236 | 0.4449 | 0.4141 | 0.4515 | 0.4168 |
| 7B1c | 0.4449 | 0.4141 | 0.4386 | 0.4119 | 0.4343 | 0.4029 | 0.4404 | 0.4051 |
| 7B1d | 0.4515 | 0.4168 | 0.4449 | 0.4141 | 0.4404 | 0.4051 | 0.4468 | 0.4077 |
| 7B2a | 0.4404 | 0.4051 | 0.4343 | 0.4029 | 0.4301 | 0.3940 | 0.4359 | 0.3960 |
| 7B2b | 0.4468 | 0.4077 | 0.4404 | 0.4051 | 0.4359 | 0.3960 | 0.4420 | 0.3985 |
| 7B2c | 0.4359 | 0.3960 | 0.4301 | 0.3940 | 0.4260 | 0.3854 | 0.4317 | 0.3873 |
| 7b2d | 0.4420 | 0.3985 | 0.4359 | 0.3960 | 0.4317 | 0.3873 | 0.4373 | 0.3893 |
| 8A1a | 0.4625 | 0.4275 | 0.4562 | 0.4260 | 0.4515 | 0.4168 | 0.4573 | 0.4178 |
| 8A1b | 0.4688 | 0.4290 | 0.4625 | 0.4275 | 0.4573 | 0.4178 | 0.4634 | 0.4193 |
| 8A1c | 0.4573 | 0.4178 | 0.4515 | 0.4168 | 0.4468 | 0.4077 | 0.4524 | 0.4086 |
| 8A1d | 0.4634 | 0.4193 | 0.4573 | 0.4178 | 0.4524 | 0.4086 | 0.4583 | 0.4100 |
| 8A2a | 0.4524 | 0.4086 | 0.4468 | 0.4077 | 0.4420 | 0.3985 | 0.4475 | 0.3994 |
| 8A2b | 0.4583 | 0.4100 | 0.4524 | 0.4086 | 0.4475 | 0.3994 | 0.4532 | 0.4008 |
| 8A2c | 0.4475 | 0.3994 | 0.4420 | 0.3985 | 0.4373 | 0.3893 | 0.4428 | 0.3906 |
| 8A2d | 0.4532 | 0.4008 | 0.4475 | 0.3994 | 0.4428 | 0.3906 | 0.4483 | 0.3919 |

ELECTRO-OPTICAL CHARACTERISTICS:


Relative Luminous Flux v.s. Forward Current

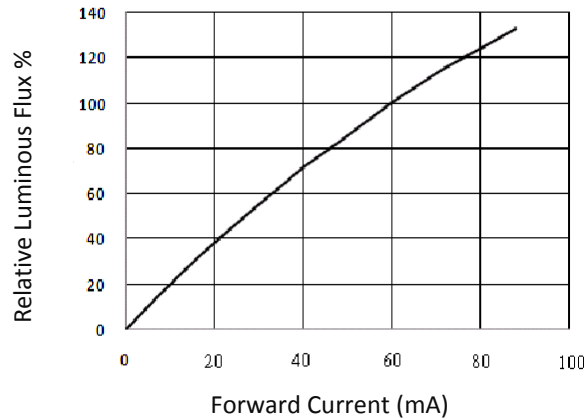


Forward Current v.s. Forward Voltage

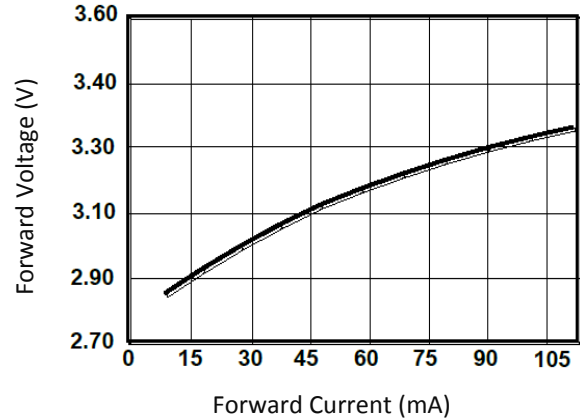


Relative Luminous Flux v.s. Ambient Temp.

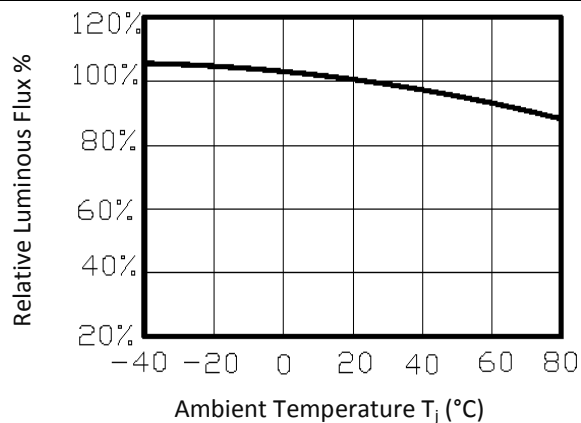


Relative Forward Voltage v.s. Ambient Temp.

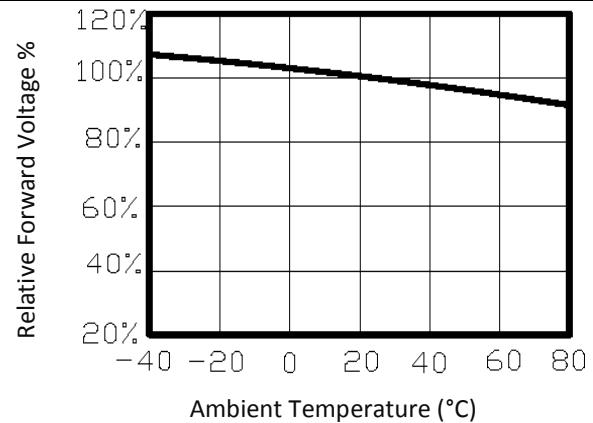


Relative Spectral Power v.s. Wavelength

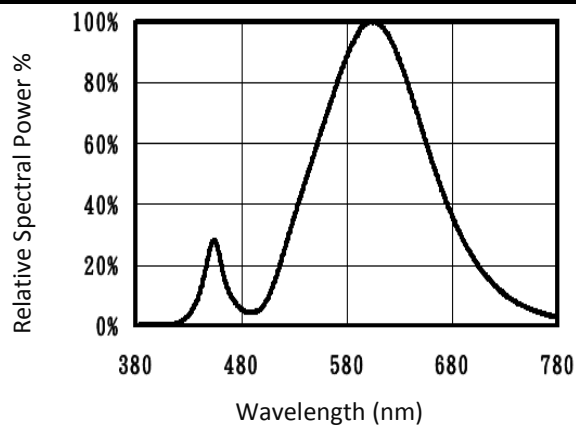


Directive Radiation

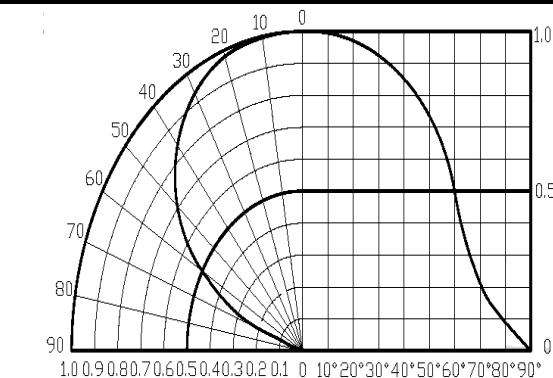

Relative Emission Efficiency v.s. Forward Current

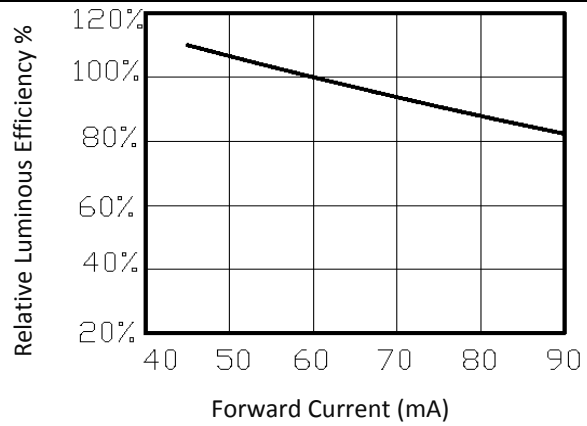


Forward Current Derating Curve

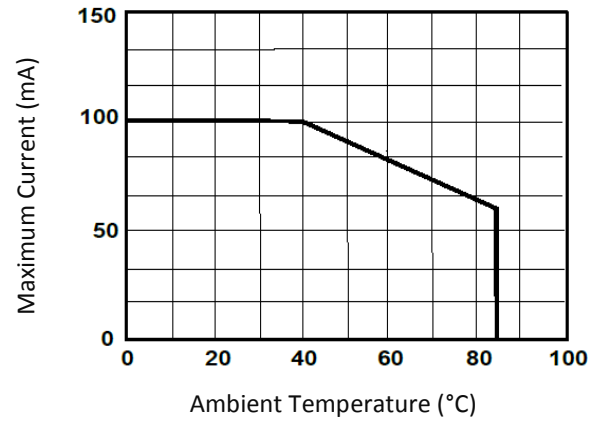



RECOMMENDED SOLDERING PROFILE:

IR Reflow Lead-free Solder:

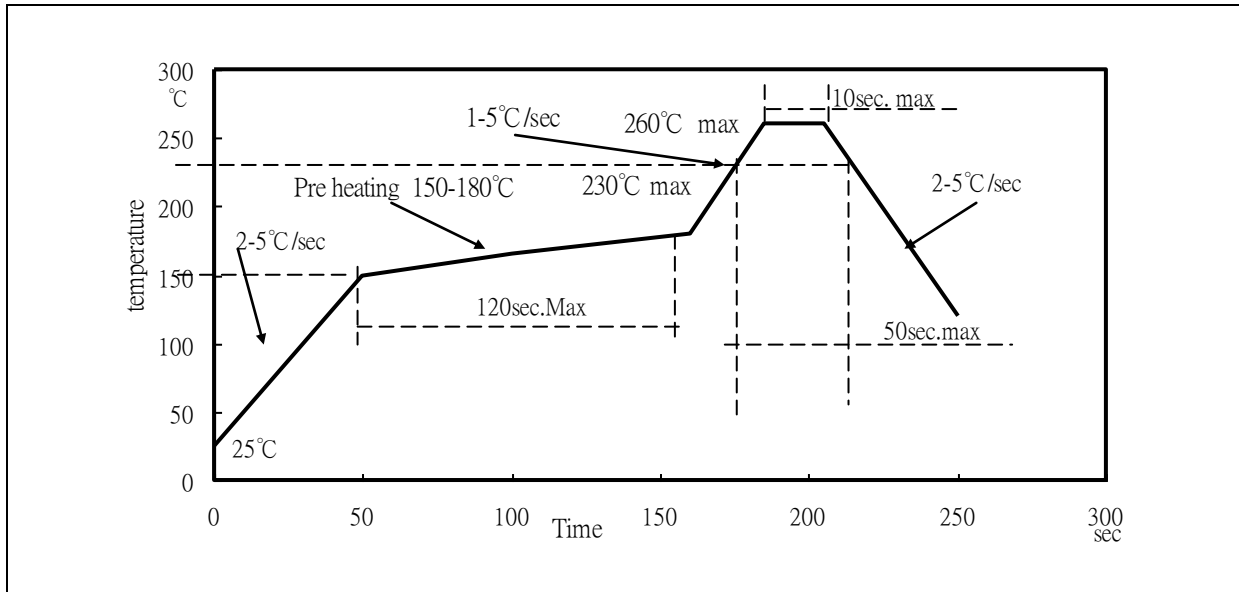


Note:

1. Maximum reflow soldering: 3 times.
2. Recommended reflow temperature: 240°C. Maximum soldering temperature should be limited to 260°C.
3. Before, during, and after soldering, should not apply stress on the components and PCB board.



PACKING SPECIFICATION:

Reel Dimension:

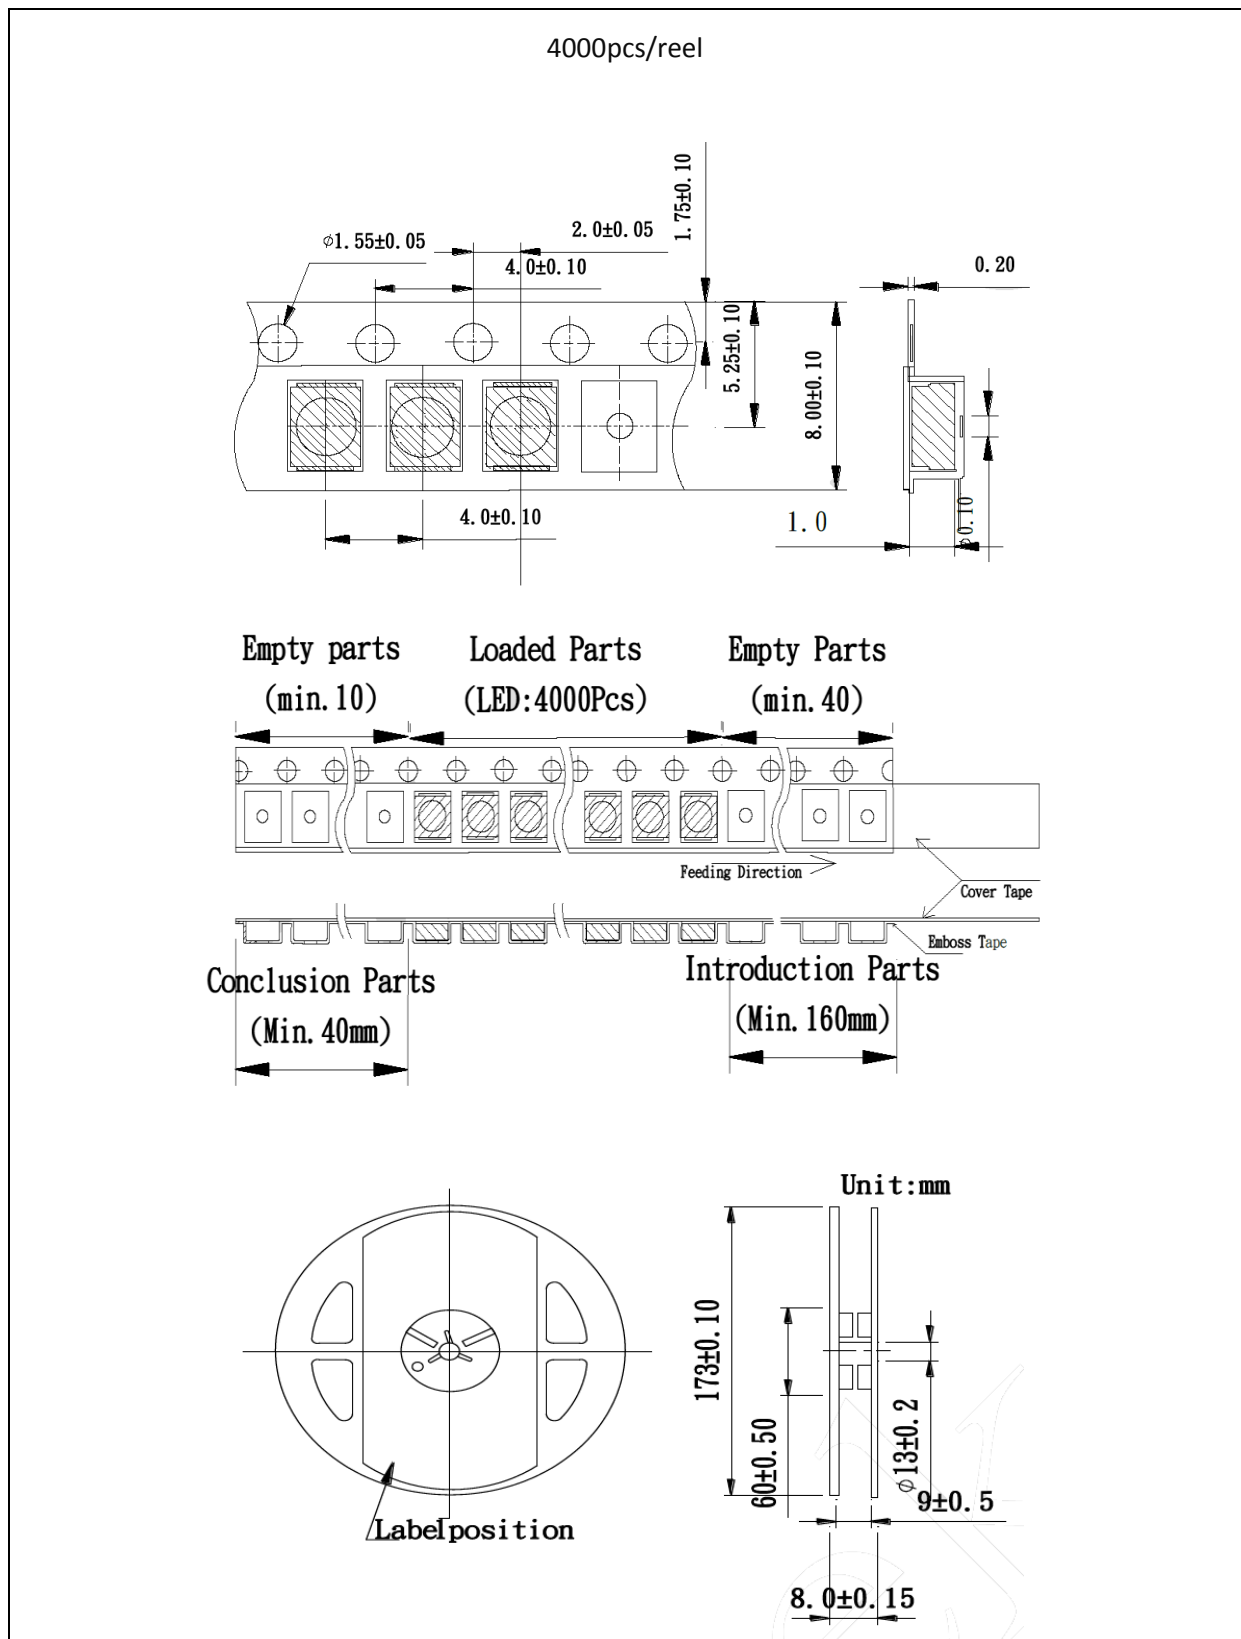

PRECAUTIONS OF USE:

Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 month at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent and apply baking at 60°C±5°C for 15hrs before use.


Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 70±3°C x 24hrs and <5%RH, taped / reel package.
- 100±3°C x 2hrs, bulk (loose) package.
- 130±3°C x 30min, bulk (loose) package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

Testing Circuit:

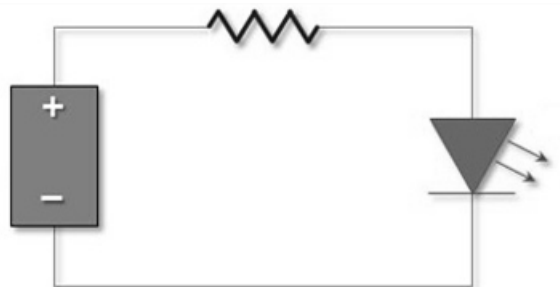

Must apply resistor(s) for protection (over current proof).

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

REVISION RECORD:

| Version | Date | Summary of Revision |
|---------|------------|---------------------|
| A1.0 | 31/03/2015 | Datasheet set-up. |