



BRIGHTTEK
BRIGHTTEK (EUROPE) LIMITED

Brighten up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



IECQ HSPM

PRODUCT DATASHEET



- ▶ PLCC2
- ▶ K1 Series
- ▶ Warm White (3000K)

NOW07S14 (Tube)
NOW07S14RL (Reel)



Release Date: 27 May 2014 Version: A1.1



K1 Series

K1 Series

RoHS
Compliant



FEATURES:

- **Package:** PLCC White SMT Package
- **Forward Current:** 350mA
- **Forward Voltage (typ.):** 3.2V
- **Luminous Flux (typ.):** 85lm @350mA
- **Colour:** Warm White
- **CCT:** 3000K
- **Viewing angle:** 120°
- **Materials:**
 - Die: InGaN
 - Resin: Silicon (Water Clear)
- **Operating Temperature:** -30~+100°C
- **Storage Temperature:** -40~+120°C
- **Grouping parameters:**
 - Forward voltage
 - Luminous flux
 - CIE Chromaticity
- **Soldering methods:** Reflow soldering
- **Preconditioning:** acc. to JEDEC Level 3
- **Packing:** 2000pcs/carton (40 tubes); 50pcs/tube
24mm tape with 1000pcs/reel, ø330mm (13")

APPLICATIONS:

- General Lighting
- Commercial Lighting
- Residential Lighting
- Architectural Lighting
- Flash Lighting
- Reading Lights

CHARACTERISTICS:

Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Forward Current	I_F	350	mA
Peak Forward Current Duty 1/10@10KHz	I_{FP}	500	mA
Operating Temperature	T_{OPR}	-30~+100	°C
Storage Temperature	T_{STG}	-40~+120	°C
Junction Temperature	T_j	110	°C
Temperature Coefficient of VF	$\Delta V_F / \Delta T_j$	-2	mV/°C
Thermal Resistance Junction to Lead	$T_{junction-lead}$	12	°C/W

1. Not suitable to be driven in reverse bias.

Electrical & Optical Characteristics (Ta=25°C)


Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V_F	2.8	3.2	3.6	V	$I_F=350\text{mA}$
Luminous Flux	Φ_v	60	85	---	lm	$I_F=350\text{mA}$
Chromaticity Coordinates	X	0.3870	---	0.5050	---	$I_F=350\text{mA}$
	Y	0.3600	---	0.4580		
Colour Temperature	CCT	2500	3000	3800	K	$I_F=350\text{mA}$
Viewing Angle	$2\theta_{1/2}$	---	120	---	deg	$I_F=350\text{mA}$

2. Luminous intensity (I_v) $\pm 15\%$, Forward Voltage (V_F) $\pm 0.1\text{V}$, Viewing angle($2\theta_{1/2}$) $\pm 5\%$
3. IS standard testing




OUTLINE DIMENSION:

Package Dimension:

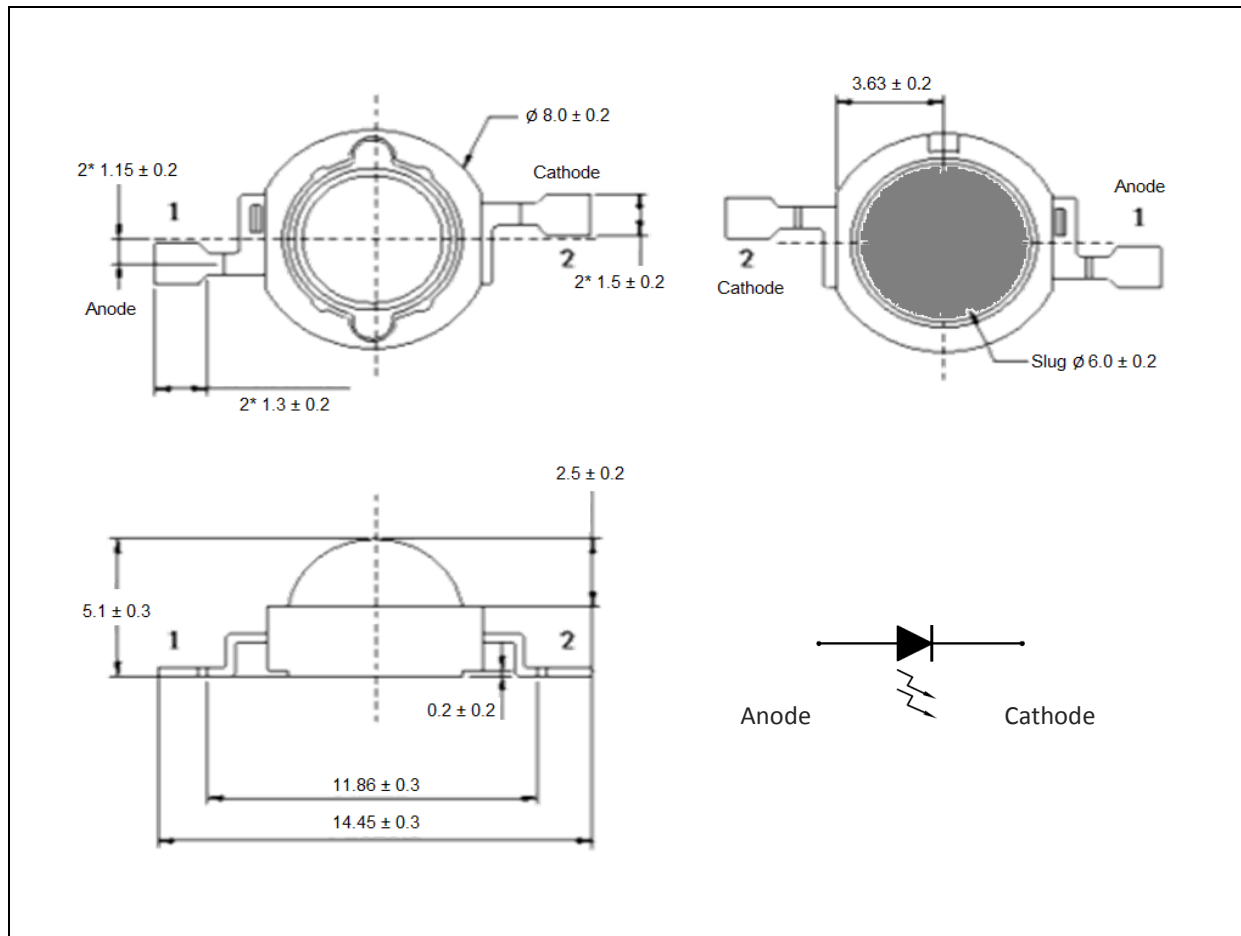

1. All dimensions are in millimetre (mm).
2. Tolerance $\pm 0.1\text{mm}$, unless otherwise noted.

Recommended Soldering Pad Dimension:

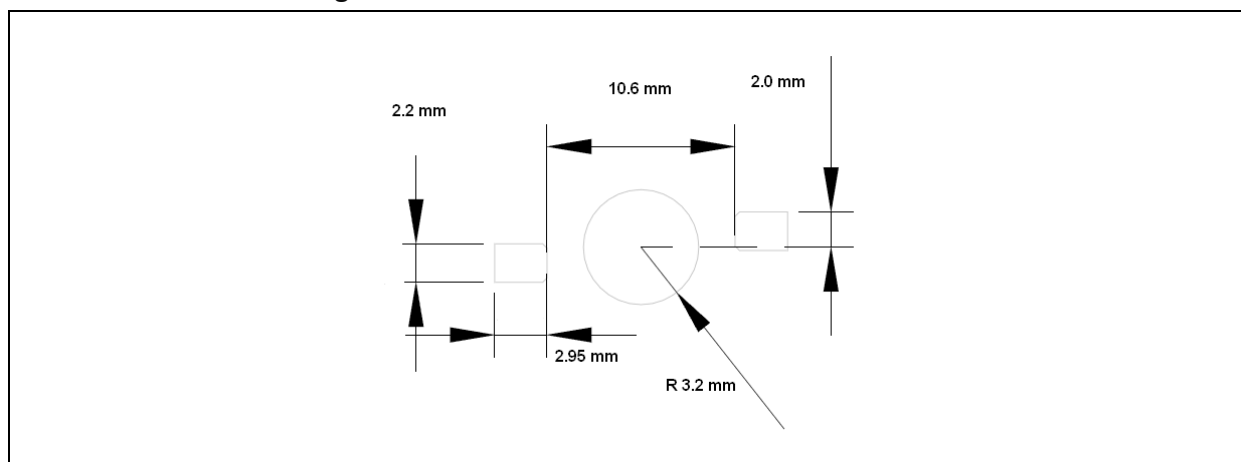

1. Dimensions are in millimetre (mm).
2. Tolerance $\pm 0.1\text{mm}$ with angle tolerance $\pm 0.5^\circ$.

BINNING GROUPS:

Forward Voltage Classifications ($I_F = 350\text{mA}$):


Code	Min.	Max.	Unit
1	2.8	2.9	V
2	2.9	3.0	
3	3.0	3.1	
4	3.1	3.2	
5	3.2	3.3	
6	3.3	3.4	
7	3.4	3.5	
8	3.5	3.6	

Luminous Flux Classifications ($I_F = 350\text{mA}$):

Code	Min.	Max.	Unit
29	60	70	lm
30	70	80	
31	80	90	
32	90	100	
33	100	110	



CIE CHROMATICITY DIAGRAM:

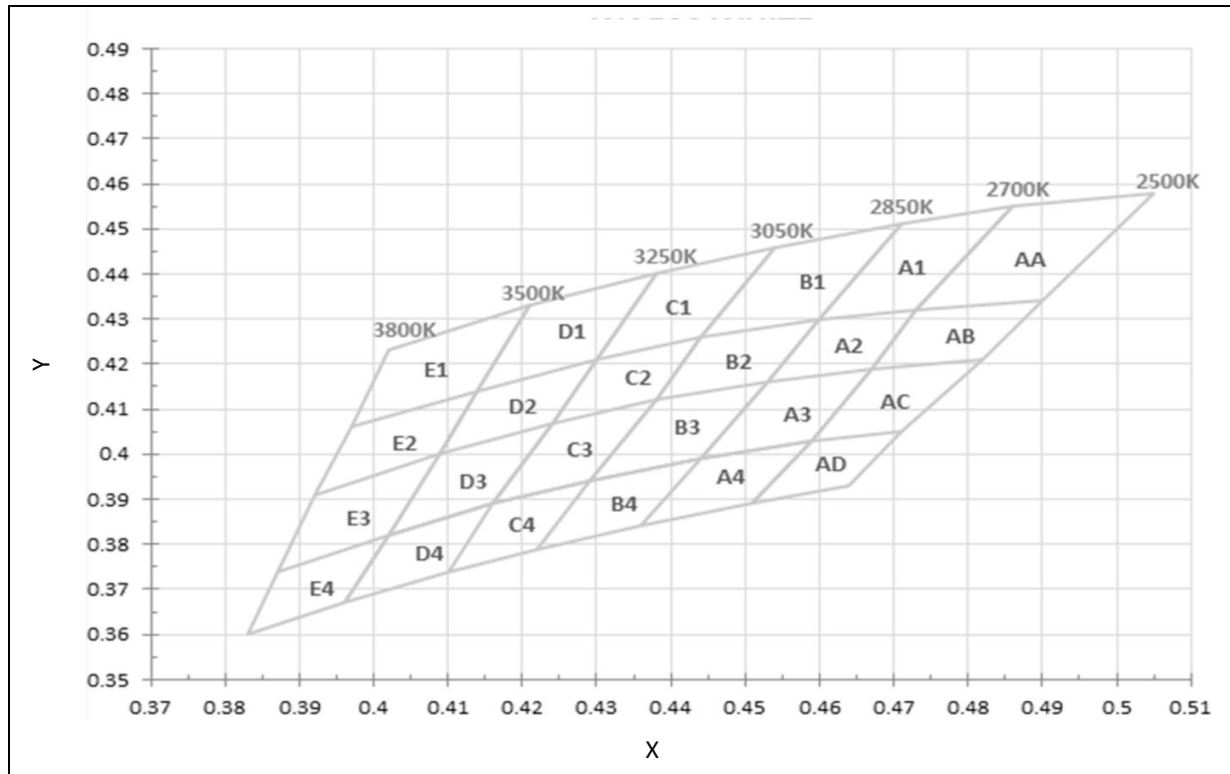

Chromaticity Coordinates Classifications ($I_F = 350\text{mA}$):


	1		2		3		4	
	X	Y	X	Y	X	Y	X	Y
E1	0.4210	0.4330	0.4140	0.4140	0.3970	0.4060	0.4020	0.4230
E2	0.4140	0.4140	0.4090	0.4000	0.3920	0.3910	0.3970	0.4060
E3	0.3920	0.3910	0.3870	0.3740	0.4020	0.3820	0.4090	0.4000
E4	0.3870	0.3740	0.3830	0.3600	0.3960	0.3670	0.4020	0.3820
D1	0.4210	0.4330	0.4140	0.4140	0.4300	0.4210	0.4380	0.4400
D2	0.4140	0.4140	0.4090	0.4000	0.4240	0.4070	0.4300	0.4210
D3	0.4090	0.4000	0.4020	0.3820	0.4160	0.3890	0.4240	0.4070
D4	0.4160	0.3890	0.4020	0.3820	0.3960	0.3670	0.4100	0.3740
C1	0.4380	0.4400	0.4300	0.4210	0.4440	0.4260	0.4540	0.4460
C2	0.4300	0.4210	0.4240	0.4070	0.4380	0.4120	0.4440	0.4260
C3	0.4240	0.4070	0.4160	0.3890	0.4290	0.3940	0.4380	0.4120
C4	0.4290	0.3940	0.4160	0.3890	0.4100	0.3740	0.4220	0.3790

	1		2		3		4	
	X	Y	X	Y	X	Y	X	Y
B1	0.4540	0.4460	0.4440	0.4260	0.4600	0.4300	0.4710	0.4510
B2	0.4440	0.4260	0.4380	0.4120	0.4530	0.4160	0.4600	0.4300
B3	0.4380	0.4120	0.4290	0.3840	0.4440	0.3990	0.4530	0.4160
B4	0.4440	0.3990	0.4290	0.3940	0.4220	0.3790	0.4360	0.3840
A1	0.4710	0.4510	0.4600	0.4300	0.4730	0.4320	0.4860	0.4550
A2	0.4600	0.4300	0.4530	0.4160	0.4670	0.4190	0.4730	0.4320
A3	0.4530	0.4160	0.4440	0.3990	0.4590	0.4030	0.4670	0.4190
A4	0.4590	0.4030	0.4440	0.3990	0.4360	0.3840	0.4510	0.3890
AA	0.4860	0.4550	0.4730	0.4320	0.4900	0.4340	0.5050	0.4580
AB	0.4730	0.4320	0.4670	0.4190	0.4820	0.4210	0.4900	0.4340
AC	0.4670	0.4190	0.4590	0.4030	0.4710	0.4050	0.4820	0.4210
AD	0.4590	0.4030	0.4510	0.3890	0.4640	0.3930	0.4710	0.4050




ELECTRO-OPTICAL CHARACTERISTICS:


Relative Intensity v.s. Forward Current

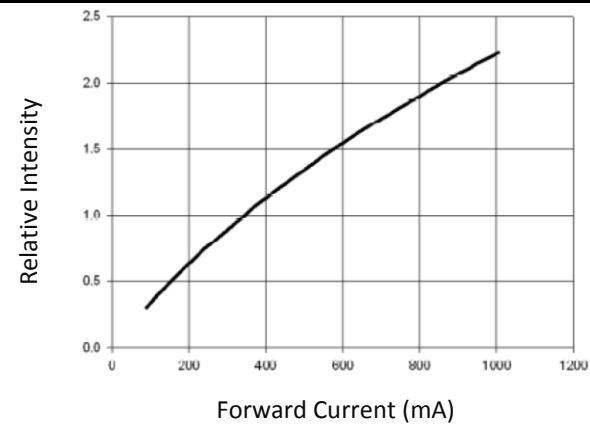


Forward Current v.s. Forward Voltage

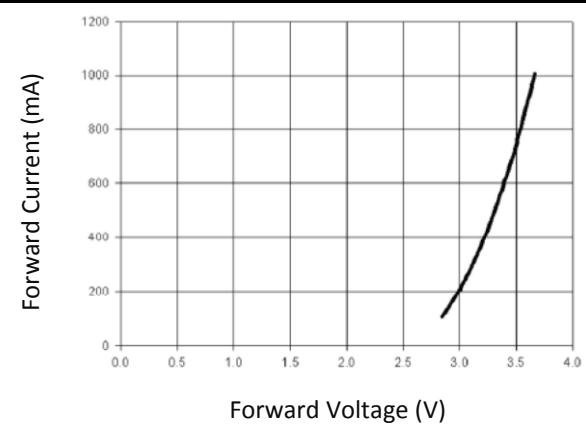


Luminous Spectrum

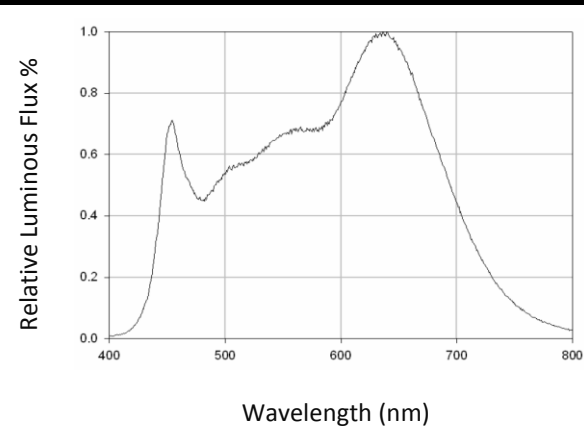

Current Derating Curves

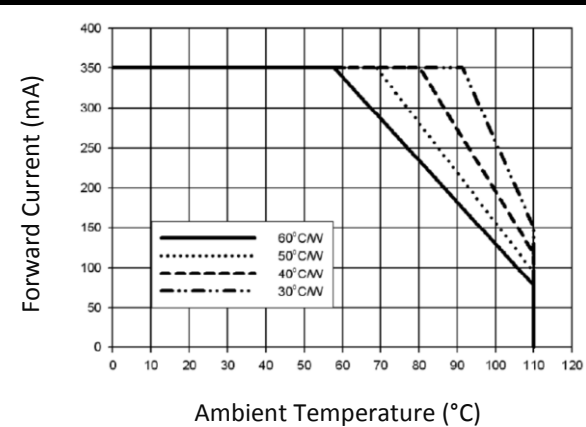


Directive Radiation

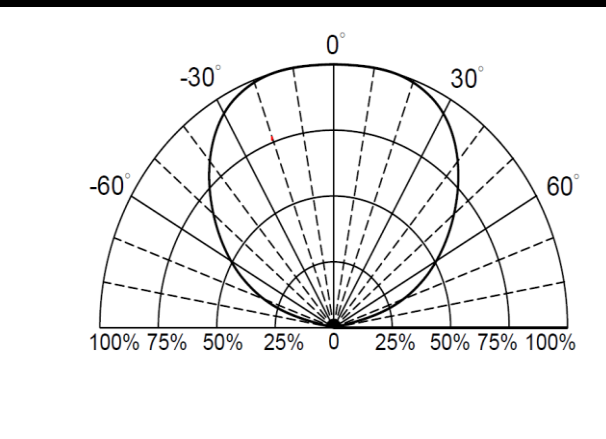



RECOMMENDED SOLDERING PROFILE:

Lead-free Solder:

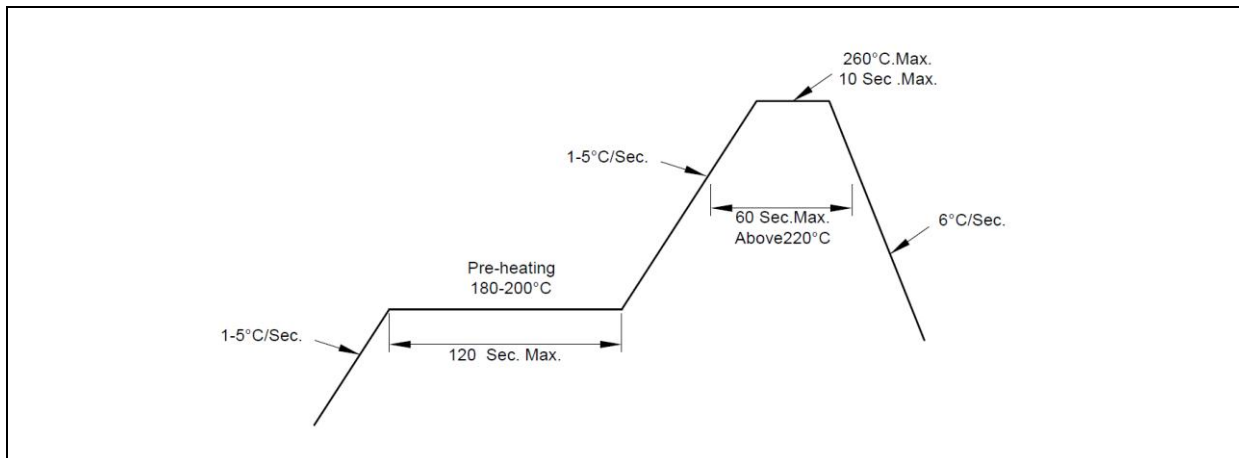

Note:



1. Maximum reflow soldering: 1 time.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.

PACKING SPECIFICATION:

Tube Dimension:


N0W07S14

2000pcs/carton (40 tubes); 50pcs/tube

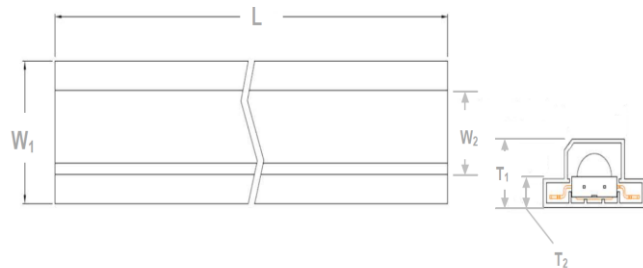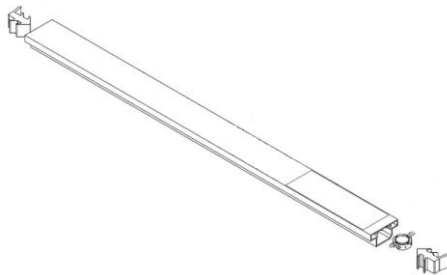


Unit(mm)

W ₁	W ₂	T ₁	T ₂	L
16.5	9.7	7.9	3.3	420

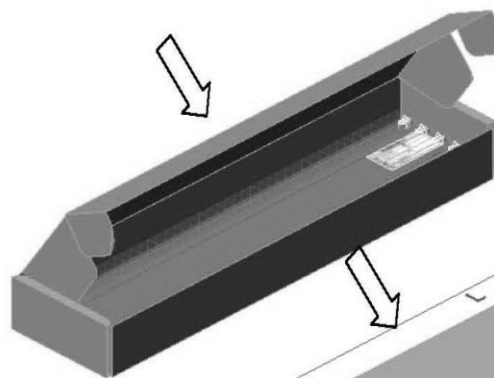

Inner Box: Dimension(mm)

L	W	H
480	271	172

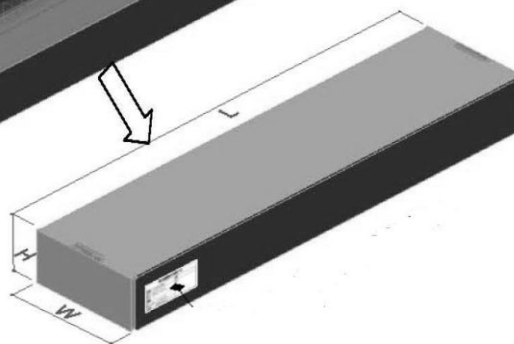




PACKING SPECIFICATION:

Reel Dimension:


N0W07S14RL

1000pcs/reel

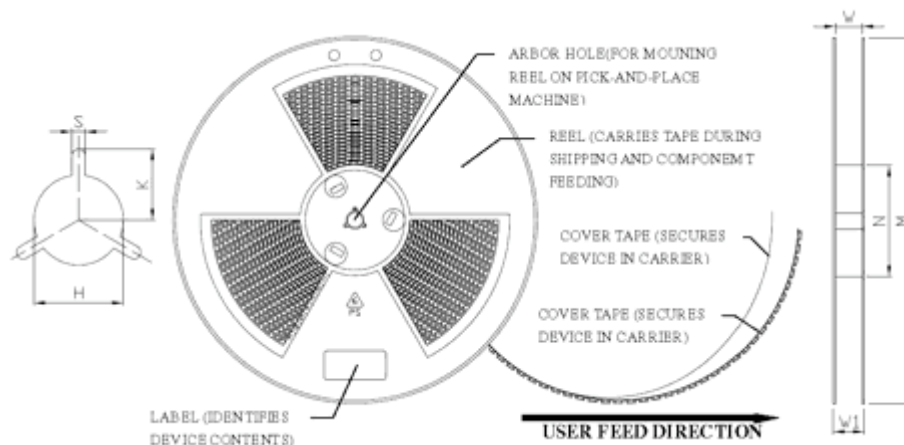

Unit: mm

M	N	W	W1	H	K	S
Φ330.0	Φ99.5	24.4	29	Φ13.5	10.75	2.5
±1.0	±1.0	±1.0	±1.0	±0.5	±0.5	±0.5

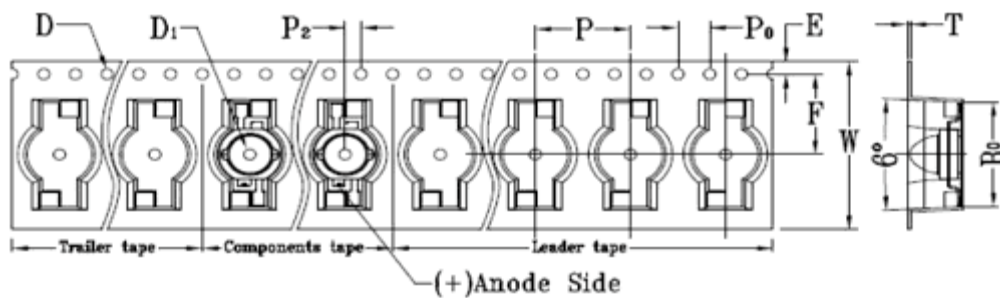

Unit: mm

W	P	E	F	P ₂	D	D ₁	P ₀	A ₀	B ₀	K ₀	T
24.0	12.0	1.75	11.5	2.0	1.5	1.5	4.0	8.2	15.0	6.7	0.4
±0.3	±0.1	±0.1	±0.1	±0.1	±0.1	±0.25	±0.1	±0.1	±0.1	±0.1	±0.05

PRECAUTIONS OF USE:

Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 month at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent and apply baking at 60°C±5°C for 15hrs before use.

Baking:


It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs.

The suggested baking conditions are as followings:

- 70±3°C x 24hrs and <5%RH, taped / reel package.
- 100±3°C x 2hrs, bulk (loose) package.
- 130±3°C x 30min, bulk (loose) package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

Testing Circuit:

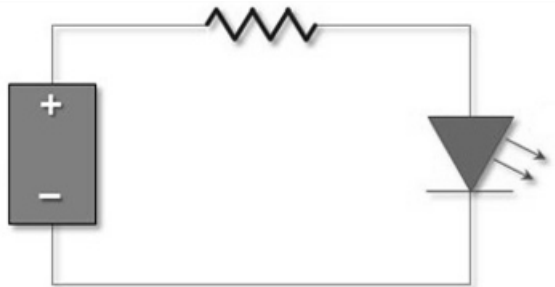

Must apply resistor(s) for protection (over current proof).

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

REVISION RECORD:

Version	Date	Summary of Revision
A1.0	10/04/2014	Datasheet set-up.
A1.1	27/05/2014	Add reel packing information.