



BRIGHTTEK

BRIGHTTEK (EUROPE) LIMITED

Brighten up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

PRODUCT DATASHEET




- ▶ PLCC2 Top View
- ▶ 2835 0.70t Series
- ▶ Warm White 3000K

NOW69S58



Release Date: 04 March 2025 Version: A1.1

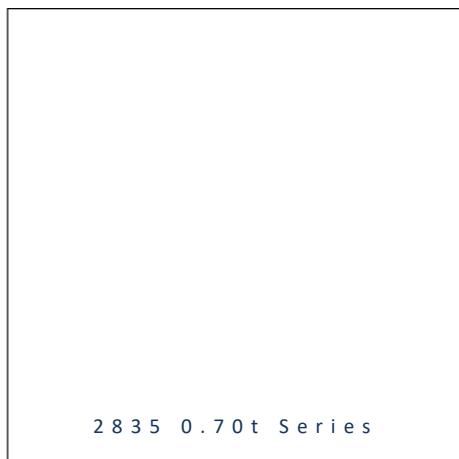

2835 0.70t Series

2835 0.70t Series



FEATURES:

- **Package:** PLCC2 SMT Mid-Power Top View Package
- **Forward Current:** 60mA
- **Forward Voltage (typ.):** 3.2V
- **Luminous Flux (typ.):** 24lm@60mA
- **Colour:** Warm White
- **Colour Temperature (typ.):** 3000K
- **Viewing Angle:** 120°
- **Materials:**
 - Resin: Silicon (Yellow Diffused)
 - L/T Finish: Ag plated
- **Operating Temperature:** -40~+85°C
- **Storage Temperature:** -40~+85°C
- **Grouping Parameters:**
 - Forward Voltage
 - Luminous Flux
 - CIE Chromaticity
- **Soldering Methods:** Reflow
- **MSL Level:** 5a according to J-STD020
- **Packing:** 8mm tape with max.4000pcs /reel, ø178mm (7")

APPLICATIONS:

- Indoor/Outdoor Lighting
- Commercial Lighting
- Architectural Lighting
- LED Backlight
- General Lighting
- Torch

CHARACTERISTICS:

Absolute Maximum Characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Ratings	Unit
DC Forward Current	I_F	60	mA
Pulse Forward Current Duty Factor 10%, Frequency 1kHz	I_{PF}	100	mA
Power Dissipation	P_D	0.2	W
Reverse Voltage	V_R	5	V
Reverse Current @5V	I_R	10	μA
Electrostatic Discharge (HBM)	ESD	1000	V
Operating Temperature	T_{OPR}	$-40^{\circ}\sim+85^{\circ}$	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	$-40^{\circ}\sim+85^{\circ}$	$^{\circ}\text{C}$
Soldering Temperature	T_{SOL}	260 for 5S	$^{\circ}\text{C}$
Colour Rendering Index	CRI	min.80	---

Electrical & Optical Characteristics ($T_a=25^{\circ}\text{C}$)


Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V_F	2.8	3.2	3.6	V	$I_F=60\text{mA}$
Luminous Flux	Φ_V	20	---	28	lm	$I_F=60\text{mA}$
Chromaticity Coordinates	X	---	0.4300	---	---	$I_F=60\text{mA}$
	Y	---	0.4000	---		
Colour Temperature	CCT	---	3000	---	K	$I_F=60\text{mA}$
Viewing Angle	$2\theta_{1/2}$	---	120	---	deg	$I_F=60\text{mA}$

1. Luminous intensity (I_v) $\pm 10\%$, Forward Voltage (V_F) $\pm 0.1\text{V}$, Viewing angle($2\theta_{1/2}$) $\pm 5^{\circ}$




OUTLINE DIMENSION:

Package Dimension:

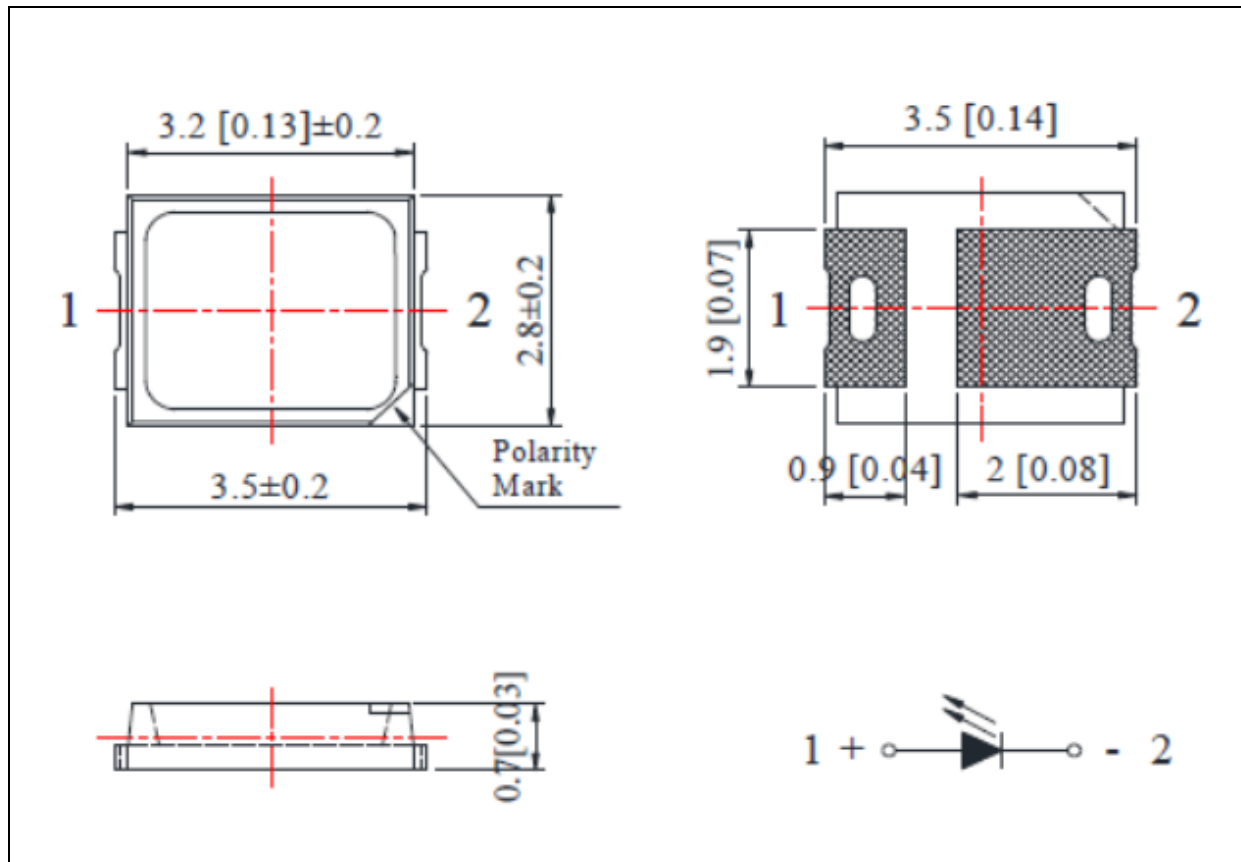

1. All dimensions are in millimetre (mm).
2. Tolerance $\pm 0.13\text{mm}$, unless otherwise noted.

Recommended Soldering Pad Dimension:

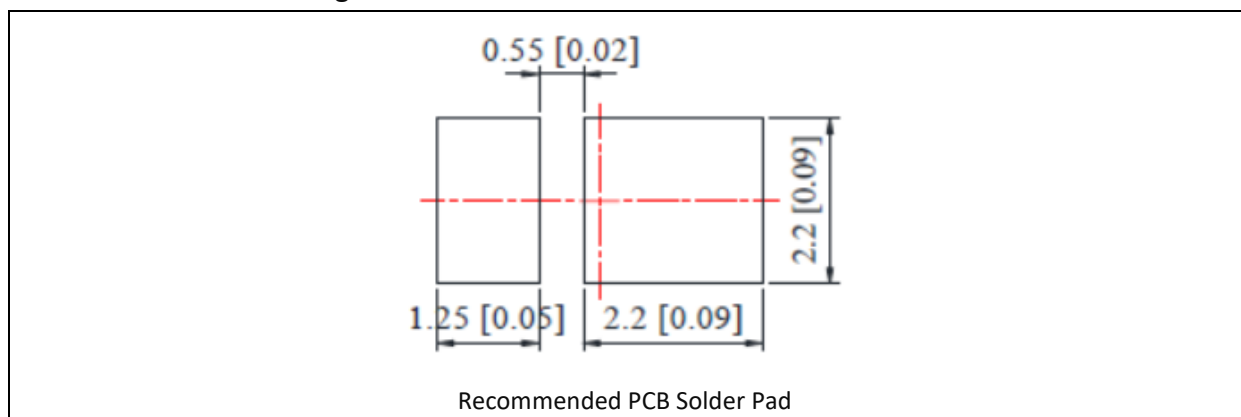

Recommended PCB Solder Pad

1. Dimensions are in millimetre (mm).
2. Tolerance $\pm 0.12\text{mm}$ with angle tolerance $\pm 0.5^\circ$.

BINNING GROUPS:

Forward Voltage Classifications ($I_F = 60\text{mA}$):


Code	Min.	Max.	Unit
W6M-QXX	2.8	3.6	V

Luminous Flux Classifications ($I_F = 60\text{mA}$):

Code	Min.	Max.	Unit
W6M-Q20	20	22	lm
W6M-Q22	22	24	
W6M-Q24	24	26	
W6M-Q26	26	28	



CIE CHROMATICITY DIAGRAM:

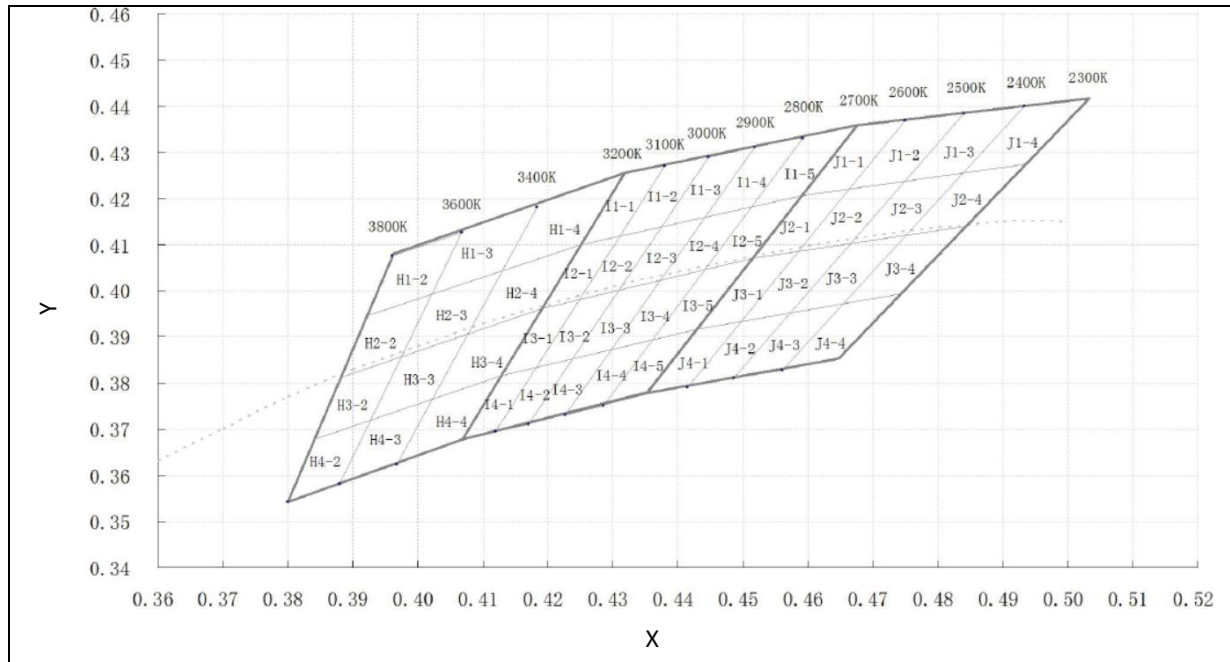

Chromaticity Coordinates Classifications ($I_F = 60\text{mA}$):


	1		2		3		4	
	X	Y	X	Y	X	Y	X	Y
H1-2	0.3920	0.3940	0.4020	0.3990	0.4070	0.4130	0.3960	0.4080
H2-2	0.3880	0.3810	0.3970	0.3860	0.4020	0.3990	0.3920	0.3940
H3-2	0.3840	0.3670	0.3930	0.3720	0.3970	0.3860	0.3880	0.3810
H4-2	0.3800	0.3540	0.3880	0.3580	0.3930	0.3720	0.3840	0.3670
H1-3	0.4020	0.3990	0.4120	0.4030	0.4180	0.4190	0.4070	0.4130
H2-3	0.3970	0.3860	0.4070	0.3900	0.4120	0.4030	0.4020	0.3990
H3-3	0.3930	0.3720	0.4020	0.3760	0.4070	0.3900	0.3970	0.3860
H4-3	0.3880	0.3580	0.3970	0.3620	0.4020	0.3760	0.3930	0.3720
H1-4	0.4120	0.4030	0.4250	0.4100	0.4320	0.4260	0.4180	0.4190
H2-4	0.4070	0.3900	0.4190	0.3960	0.4250	0.4100	0.4120	0.4030
H3-4	0.4020	0.3760	0.4130	0.3820	0.4190	0.3960	0.4070	0.3900
H4-4	0.3970	0.3620	0.4070	0.3680	0.4130	0.3820	0.4020	0.3760
I1-1	0.4250	0.4100	0.4310	0.4120	0.4380	0.4280	0.4320	0.4260
I2-1	0.4190	0.3960	0.4240	0.3980	0.4310	0.4120	0.4250	0.4100
I3-1	0.4130	0.3820	0.4180	0.3840	0.4240	0.3980	0.4190	0.3960
I4-1	0.4070	0.3680	0.4120	0.3700	0.4180	0.3840	0.4130	0.3820




	1		2		3		4	
	X	Y	X	Y	X	Y	X	Y
I1-2	0.4310	0.4120	0.4370	0.4140	0.4450	0.4300	0.4380	0.4280
I2-2	0.4240	0.3980	0.4300	0.4000	0.4370	0.4140	0.4310	0.4120
I3-2	0.4180	0.3840	0.4230	0.3850	0.4300	0.4000	0.4240	0.3980
I4-2	0.4120	0.3700	0.4170	0.3720	0.4230	0.3850	0.4180	0.3840
I1-3	0.4370	0.4140	0.4440	0.4160	0.4520	0.4320	0.4450	0.4300
I2-3	0.4300	0.4000	0.4370	0.4020	0.4440	0.4160	0.4370	0.4140
I3-3	0.4230	0.3850	0.4300	0.3870	0.4370	0.4020	0.4300	0.4000
I4-3	0.4170	0.3720	0.4230	0.3740	0.4300	0.3870	0.4230	0.3850
I1-4	0.4440	0.4160	0.4510	0.4180	0.4590	0.4340	0.4520	0.4320
I2-4	0.4370	0.4020	0.4440	0.4040	0.4510	0.4180	0.4440	0.4160
I3-4	0.4300	0.3870	0.4360	0.3890	0.4440	0.4040	0.4370	0.4020
I4-4	0.4230	0.3740	0.4290	0.3760	0.4360	0.3890	0.4300	0.3870
I1-5	0.4510	0.4180	0.4600	0.4210	0.4680	0.4360	0.4590	0.4340
I2-5	0.4440	0.4040	0.4520	0.4070	0.4600	0.4210	0.4510	0.4180
I3-5	0.4360	0.3890	0.4440	0.3920	0.4520	0.4070	0.4440	0.4040
I4-5	0.4290	0.3760	0.4360	0.3780	0.4440	0.3920	0.4360	0.3890
J1-1	0.4600	0.4210	0.4660	0.4220	0.4750	0.4370	0.4680	0.4360
J2-1	0.4520	0.4070	0.4580	0.4080	0.4660	0.4220	0.4600	0.4210
J3-1	0.4440	0.3920	0.4490	0.3930	0.4580	0.4080	0.4520	0.4070
J4-1	0.4360	0.4780	0.4410	0.3790	0.4490	0.3930	0.4440	0.3920
J1-2	0.4660	0.4220	0.4750	0.4240	0.4840	0.4390	0.4750	0.4370
J2-2	0.4580	0.4080	0.4670	0.4100	0.4750	0.4240	0.4660	0.4220
J3-2	0.4490	0.3930	0.4580	0.3950	0.4670	0.4100	0.4580	0.4080
J4-2	0.4410	0.3790	0.4490	0.3810	0.4580	0.3950	0.4490	0.3930
J1-3	0.4750	0.4240	0.4830	0.4250	0.4930	0.4400	0.4840	0.4390
J2-3	0.4670	0.4100	0.4750	0.4120	0.4830	0.4250	0.4750	0.4240
J3-3	0.4580	0.3950	0.4650	0.3970	0.4750	0.4120	0.4670	0.4100
J4-3	0.4490	0.3810	0.4560	0.3830	0.4650	0.3970	0.4580	0.3950
J1-4	0.4830	0.4250	0.4930	0.4270	0.5030	0.4420	0.4930	0.4400
J2-4	0.4750	0.4120	0.4840	0.4140	0.4930	0.4270	0.4830	0.4250
J3-4	0.4650	0.3970	0.4740	0.3990	0.4840	0.4140	0.4750	0.4120
J4-4	0.4560	0.3830	0.4650	0.3850	0.4740	0.3990	0.4650	0.3970

ELECTRO-OPTICAL CHARACTERISTICS:


Relative Luminous Intensity v.s. Forward Current

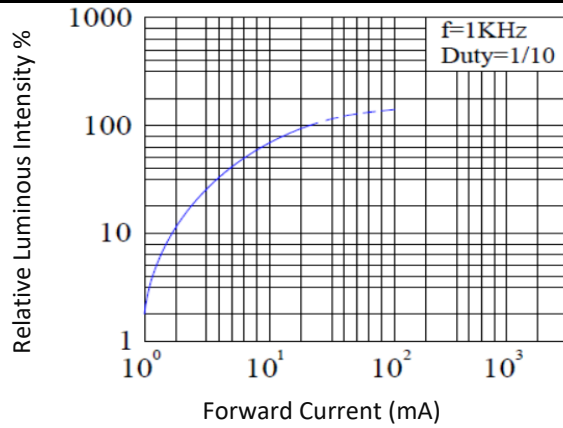


Forward Current v.s. Forward Voltage

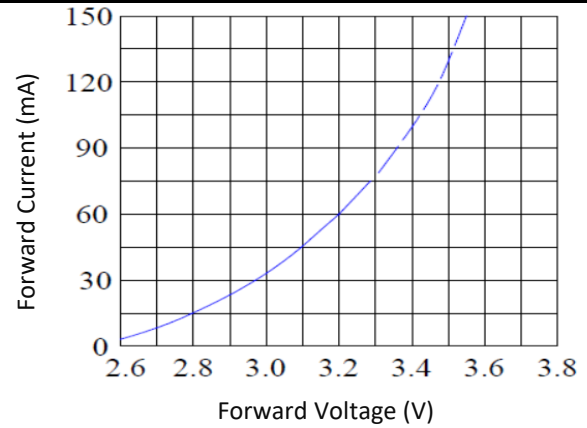


Relative Spectral Power v.s. Wavelength

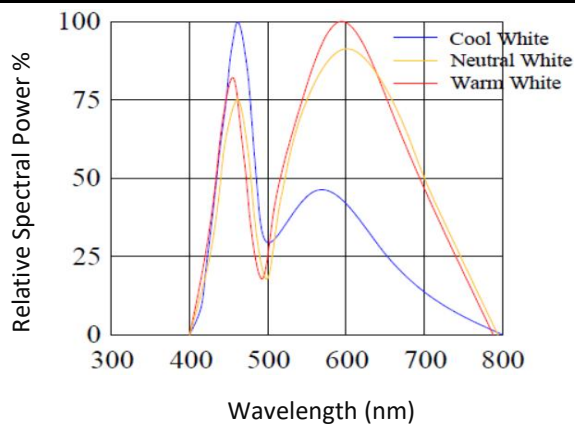


Directive Radiation

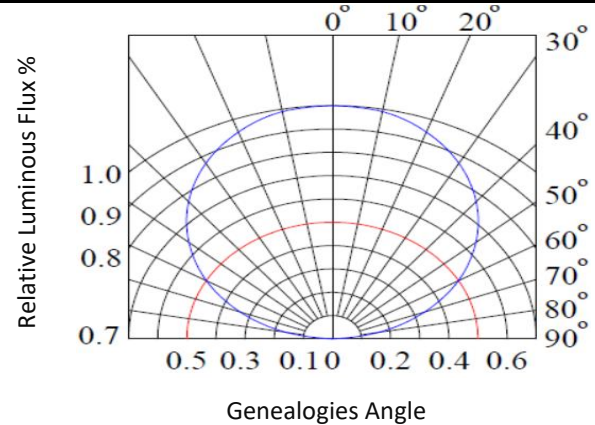

Relative Luminous Intensity v.s. Temperature

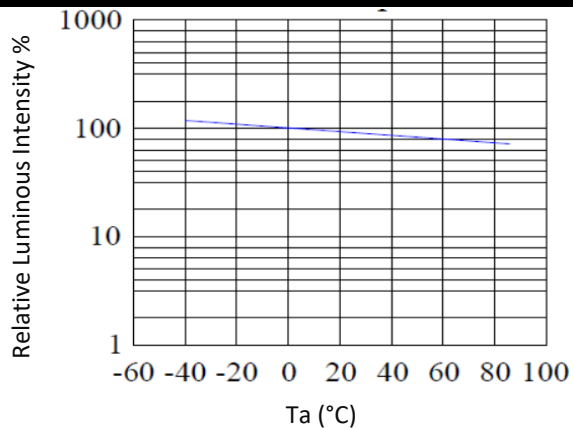


Forward Current Derating Curve

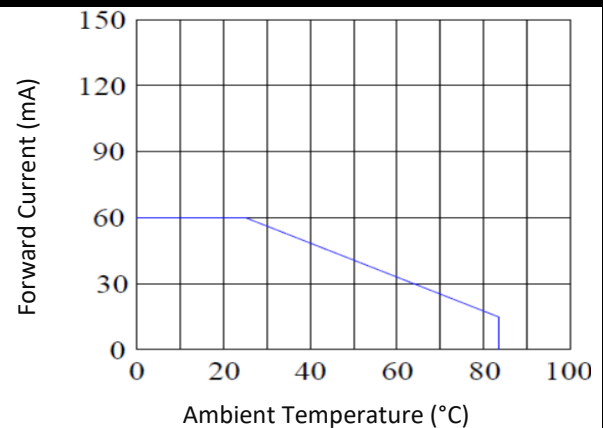



RECOMMENDED SOLDERING PROFILE:

Reflow Lead-free Solder:

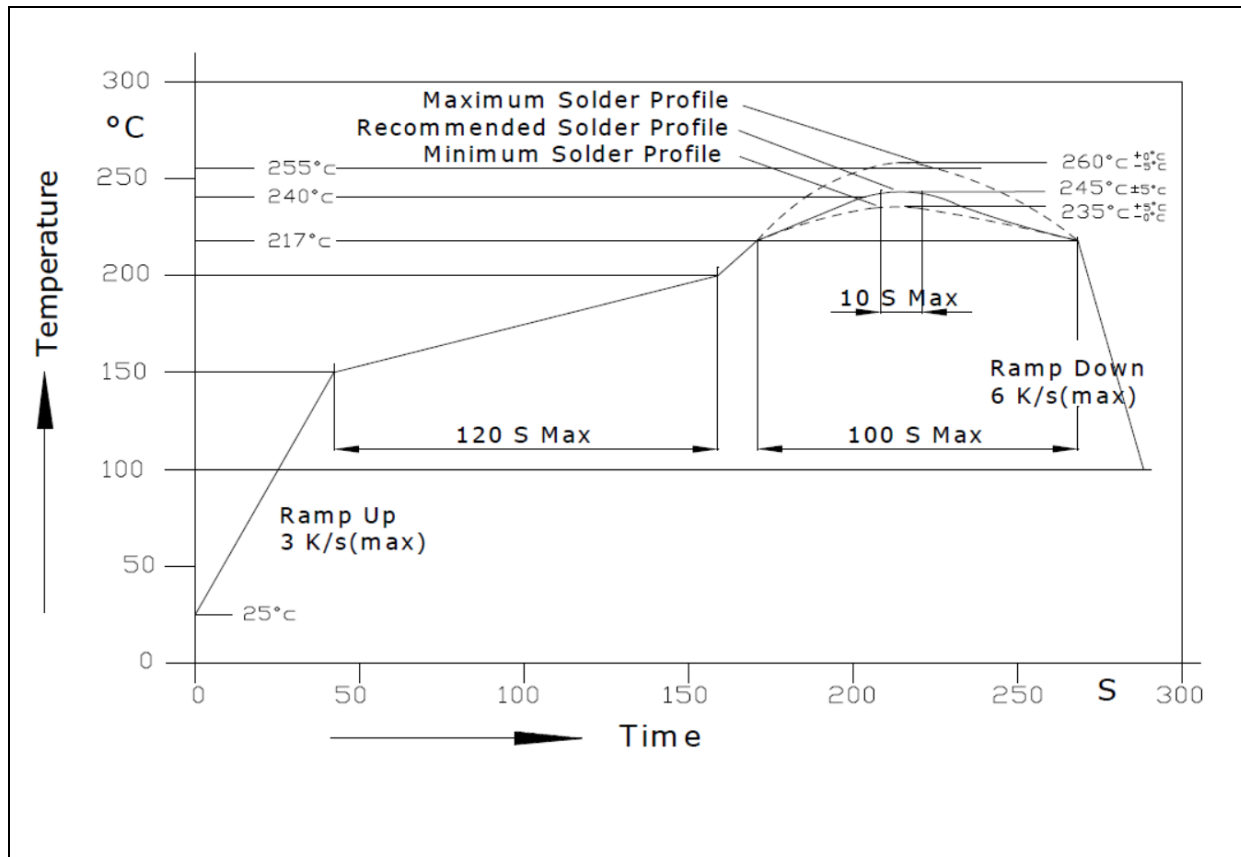


Note:

1. Maximum reflow soldering: 2 times.
2. The recommended reflow temperature is 240°C. The maximum soldering temperature should be limited to 260°C.
3. Before, during, and after soldering, should not apply stress on the components and PCB board.



PACKING SPECIFICATION:

Reel Dimension:

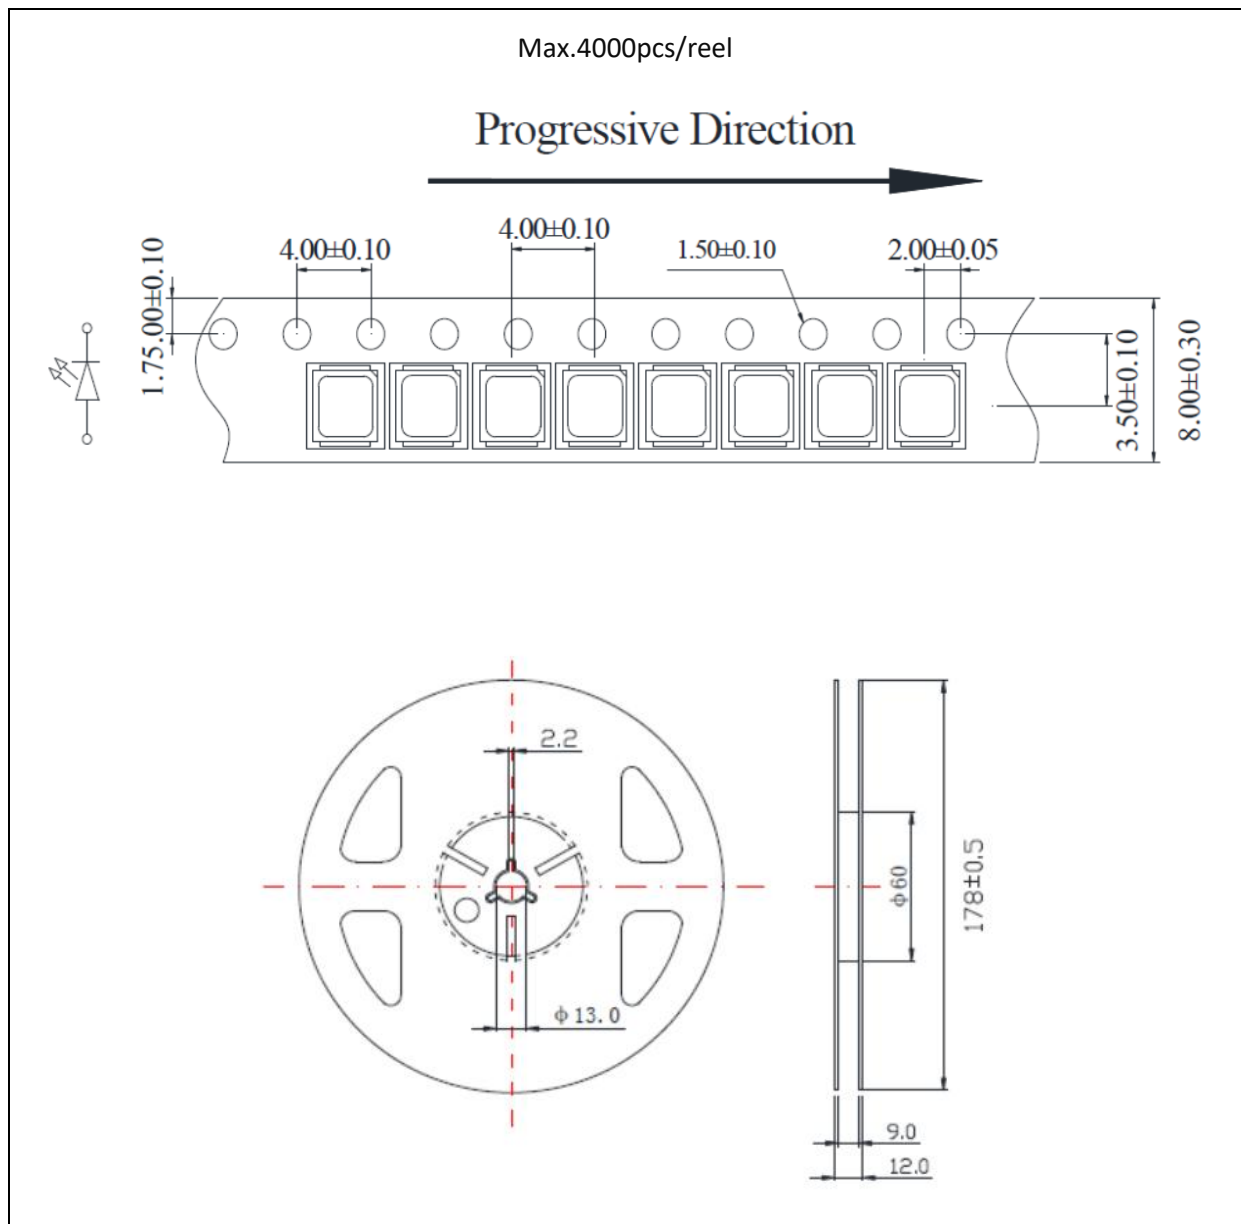

PRECAUTIONS OF USE:

Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within 24 hours. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking before use.

Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 65±5°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

Testing Circuit:



Must apply resistor(s) for protection (over current proof).

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

REVISION RECORD:

Version	Date	Summary of Revision
A1.0	22/03/2022	Datasheet set-up.
A1.1	03/03/2025	New datasheet format.