



**BRIGHTTEK**  
BRIGHTTEK (EUROPE) LIMITED

*Brighten up The World With LED!*



ISO/TS 16949:2009

BS-EN ISO 14001:2004

QC 900000 IECQ HSP98


## PRODUCT DATASHEET



- ▶ DC Input Photo Coupler
- ▶ SMD4 Gullwing
- ▶ Random-Phase TRIAC

Release Date: 07 July 2025 Version: A00

# TD305X-4L(SLM)(T1)-GV

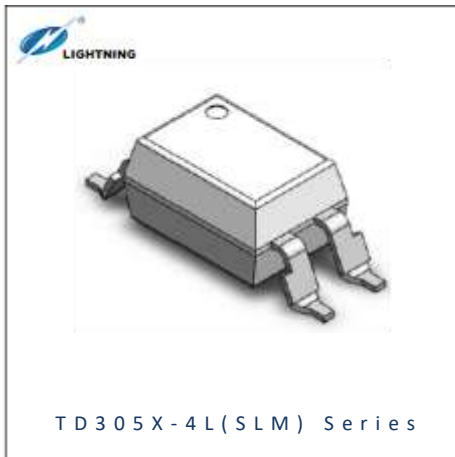

## TD305X-4L(SLM) Series



### DESCRIPTION:

The TD305X-4L(SLM) series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a monolithic silicon random-phase photo TRIAC in a plastic DIP4 package with SMD4 Gullwing lead forming option.


With the robust coplanar double mold structure, TD305X-4L(SLM) series provide the most stable isolation feature.

### FEATURES:

#### APPLICATIONS:

- Solenoid/valve controls
- Lighting controls
- Motor controls
- Temperature controls
- Static AC power switches
- Solid state relays
- Interfacing microprocessors to 115 to 240VAC peripherals

- High isolation 5000Vrms
- DC input with random-phase photo TRIAC output
- Operating temperature range -40°C to +100°C
- REACH & RoHS compliance; Halogen free
- MSLM class 1
- Regulatory Approvals:
  - UL - UL1577
  - VDE - EN60747-5-5 (VDE0884-5)
  - CQC - GB4943.1, GB8898
  - cUL - CSA Component Acceptance Service Notice 5A
- Packing: T1/T2: 1500pcs/reel



Partner with: LIGHTNING

## NAMING & ORDERING INFORMATION:

Naming Information:

<b>TD305 X - 4L (SLM) (T1) - G V</b>	
<b>TD305X-4L</b>	Part Number
<b>X</b>	Selection: LED Trigger Current (X=1~3)
<b>4L</b>	DIP 4 Package
<b>SLM</b>	Lead Form Option: SMD4 Gullwing
<b>T1</b>	Selection: Tape and Reel Option (T1(default)/T2)
<b>G</b>	Green Option
<b>V</b>	VDE Option


Ordering Information:

<b>TD305X-4L(SLM)(T1)-GV</b>						
$\underline{X}$ = Selection: LED Trigger Current (X=1~3)						
Part Number	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
TD3051-4L(SLM)(T1)-GV	I <sub>FT</sub>	---	---	15	mA	I <sub>TM</sub> =100mA Terminal Voltage=3V
TD3052-4L(SLM)(T1)-GV		---	---	10		
TD3053-4L(SLM)(T1)-GV		---	---	5		


Version No.	Original Release Date
Rev: A00	05/09/2024

## SCHEMATIC DIAGRAM & MARKING:

Schematic Diagram:

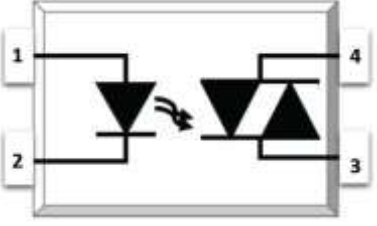	PIN Definition	
	1	Anode
	2	Cathode
	3	Terminal
	4	Terminal

Marking Information:

	Marking Definition	
	TD	Manufacturer Code
	305X-4L	Part Number & Rank
	V	VDE Applicable
	Y	Fiscal Year
	A	Manufacturing Code
	WW	Work Week

Labelling Information:

	<p>This product is manufactured, tested, and packed by</p>
	
	<p>for Brighttek (Europe) Limited</p>
	<p>for more details, please visit <a href="http://www.tdled.com">www.tdled.com</a></p>

## ABSOLUTE CHARACTERISTICS:

### Absolute Maximum Ratings:

Parameter	Symbol	Ratings	Unit
INPUT			
Forward Current	$I_F$	60	mA
Reverse Voltage	$V_R$	6	V
Junction Temperature	$T_j$	125	°C
Input Power Dissipation	$P_i$	100	mW
OUTPUT			
Off-State Output Terminal Voltage	$V_{DRM}$	600	V
Peak Repetitive Surge Current PW=100μs, 120pps	$I_{TSM}$	1	A
On-State RMS Current	$I_{T(RMS)}$	100	mA
Junction Temperature	$T_j$	125	°C
Output Power Dissipation	$P_o$	300	mW
COMMON			
Total Power Dissipation	$P_{tot}$	400	mW
Isolation Voltage	$V_{iso}$	5000 *1	Vrms
Operating Temperature	$T_{opr}$	-40~+100	°C
Storage Temperature	$T_{stg}$	-55~+125	°C
Soldering Temperature	$T_{sol}$	260 *2	°C

\*1. AC for 1 minute, R.H.=40~60%.

\*2. For 10 seconds max.

## ELECTRICAL CHARACTERISTICS:


Electrical Optical Characteristics at  $T_a=25^{\circ}\text{C}$ :

Parameter	Symbol	Values			Unit	Test Condition	
		Min.	Typ.	Max.			
<b>INPUT</b>							
Forward Voltage	$V_F$	---	1.24	1.4	V	$I_F=10\text{mA}$	
Reverse Current	$I_R$	---	---	10	$\mu\text{A}$	$V_R=6\text{V}$	
Input Capacitance	$C_{IN}$	---	8.5	250	pF	$V=0, f=1\text{kHz}$	
<b>OUTPUT</b>							
Peak Off-State Current Either Direction	$I_{DRM}$	---	---	100 *1	nA	$V_{DRM}=\text{Rated } V_{DRM}$ $I_F=0$	
Peak On-State Voltage Either Direction	$V_{TM}$	---	1.58	2.5	V	$I_{TM}=100\text{mA}$	
Critical Rate of Rise of Off-State Voltage	$dV/dt$	1000	---	---	$\text{V}/\mu\text{s}$	$V_{PEAK}=400\text{V}$ $I_F=0$	
<b>TRANSFER CHARACTERISTICS</b>							
LED Trigger Current	TD3051-4L	$I_{FT}$	---	---	15	mA	$I_{TM}=100\text{mA}$ Terminal Voltage=3V
	TD3052-4L		---	---	10		
	TD3053-4L		---	---	5		
Holding Current	$I_H$	---	257	---	$\mu\text{A}$	---	
Isolation Resistance	$R_{ISO}$	$10^{12}$	$10^{14}$	---	$\Omega$	DC=500V, 40~60% R.H.	
Floating Capacitance	$C_{IO}$	---	0.4	1	pF	$V=0, f=1\text{MHz}$	


\*1. Test voltage must be applied within  $dV/dt$  rating.

## CHARACTERISTIC CURVES:


Forward Current v.s. Ambient Temperature

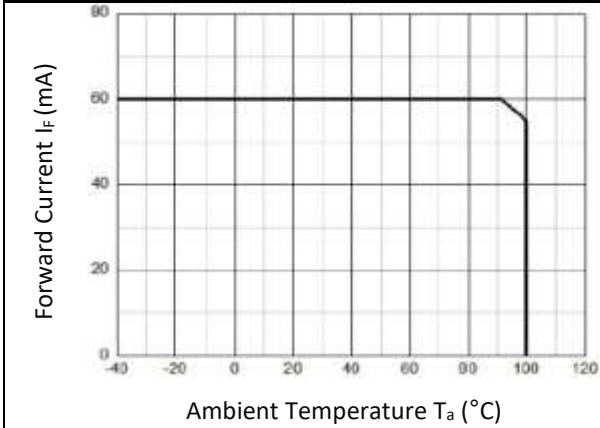


On-State Terminal Current v.s. Ambient Temp.

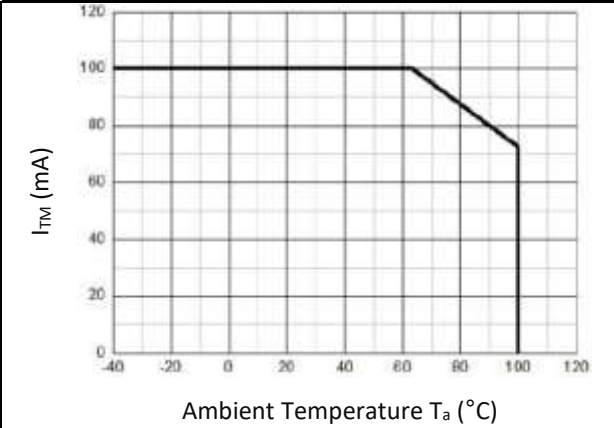


Forward Current v.s. Forward Voltage

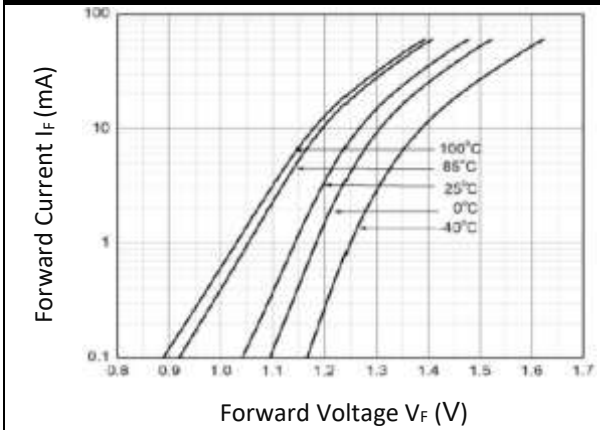


Off-State Terminal Current v.s. Ambient Temperature

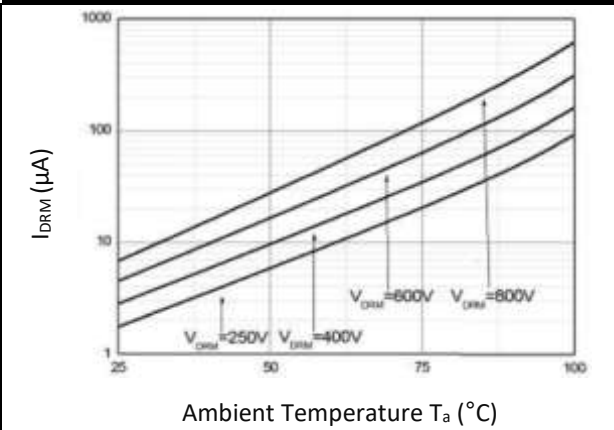

Normalized Off-State Terminal Voltage v.s. Ambient Temperature

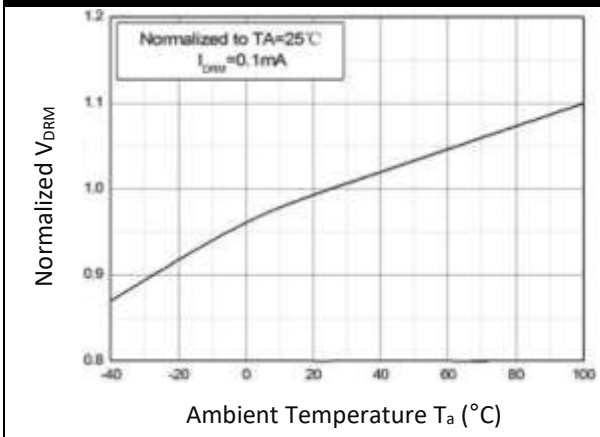


Normalized Trigger Current v.s. LED Trigger Pulse Width

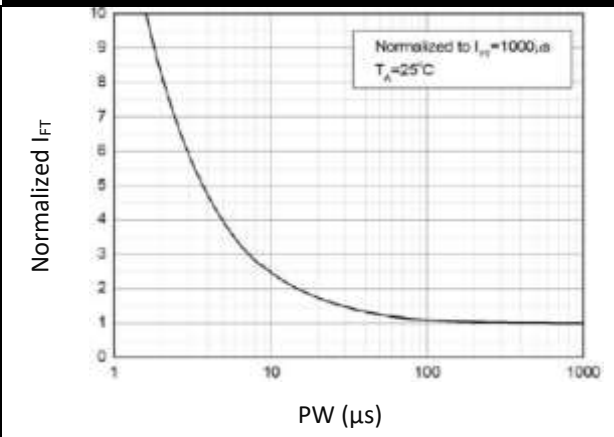


## CHARACTERISTIC CURVES:


Normalized Trigger Current v.s. Ambient Temperature

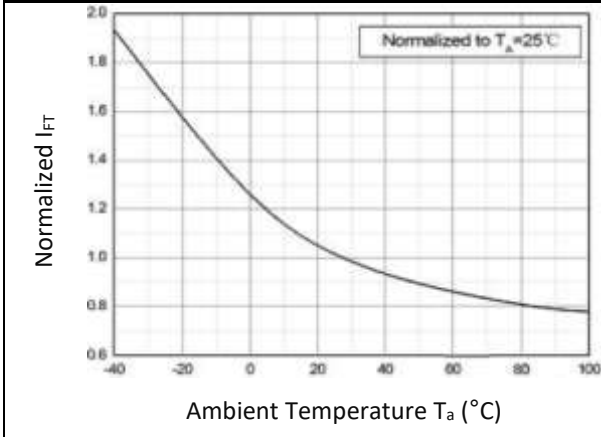


On-State Terminal Voltage v.s. Ambient Temperature

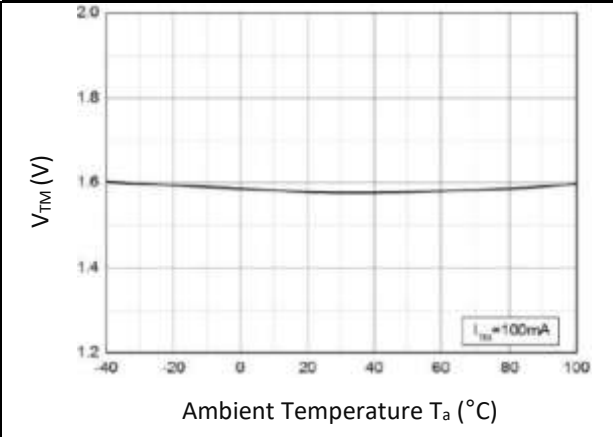


On-State Terminal Voltage v.s. On-State Terminal Current

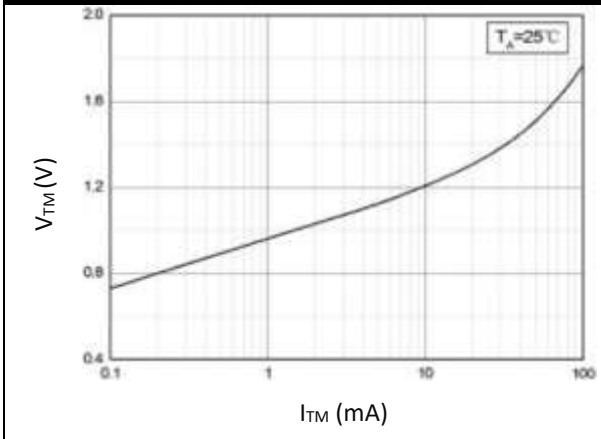


Holding Current v.s. Ambient Temperature

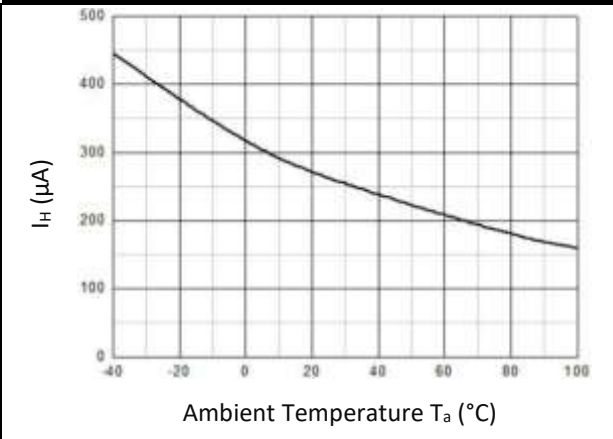

Turn On Time v.s. Forward Current

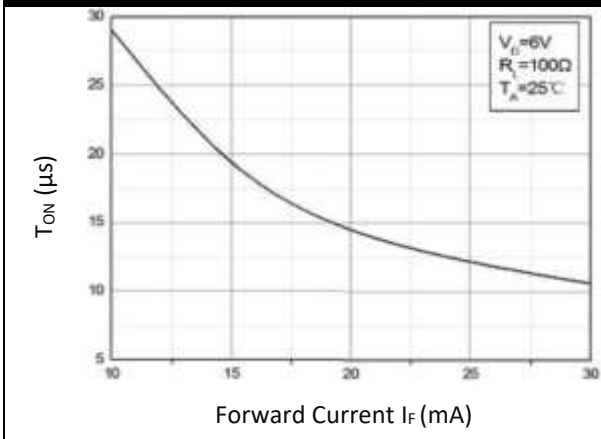


Turn On Time v.s. Ambient Temperature

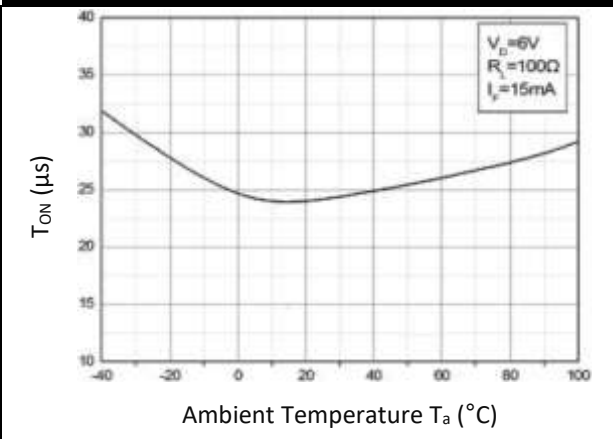


## TEST CIRCUIT:

Test Circuit and Waveforms of Turn On Time:

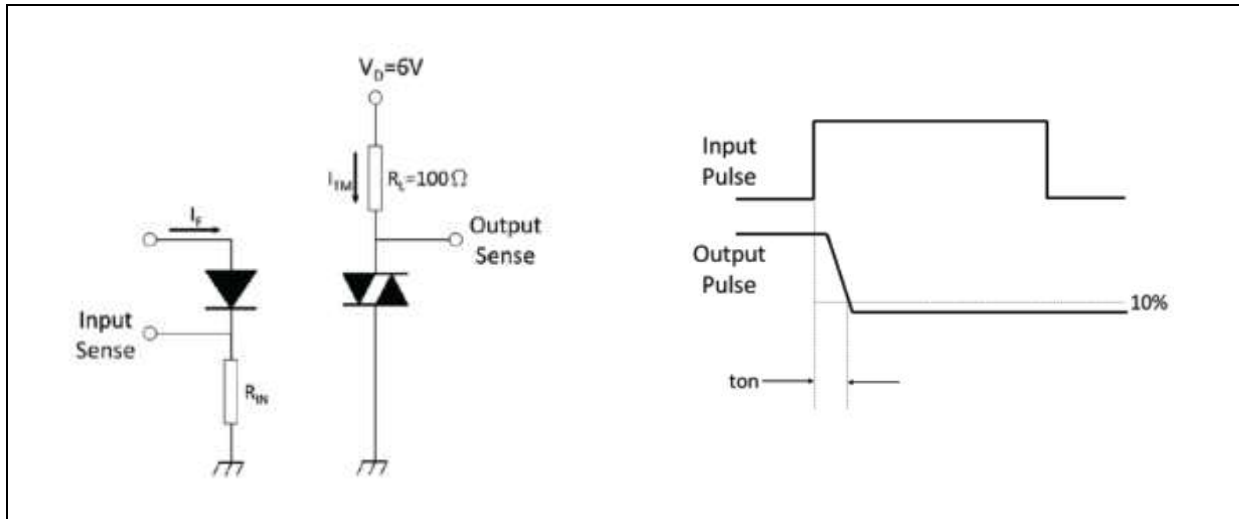


Test Circuit and Waveforms of  $dv/dt$ :

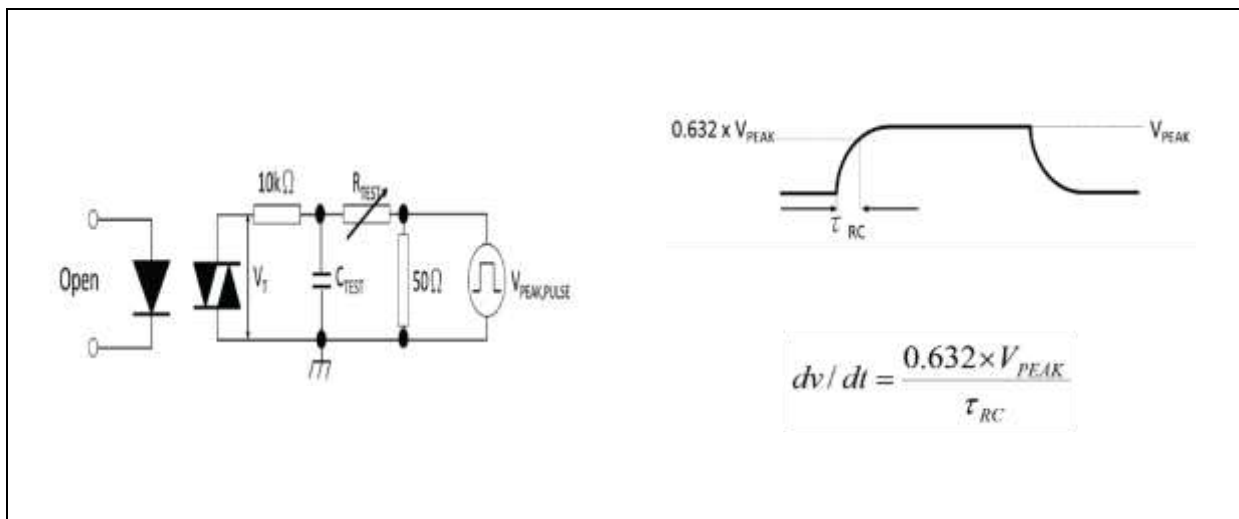




## OUTLINE DIMENSION:

Package Dimension:

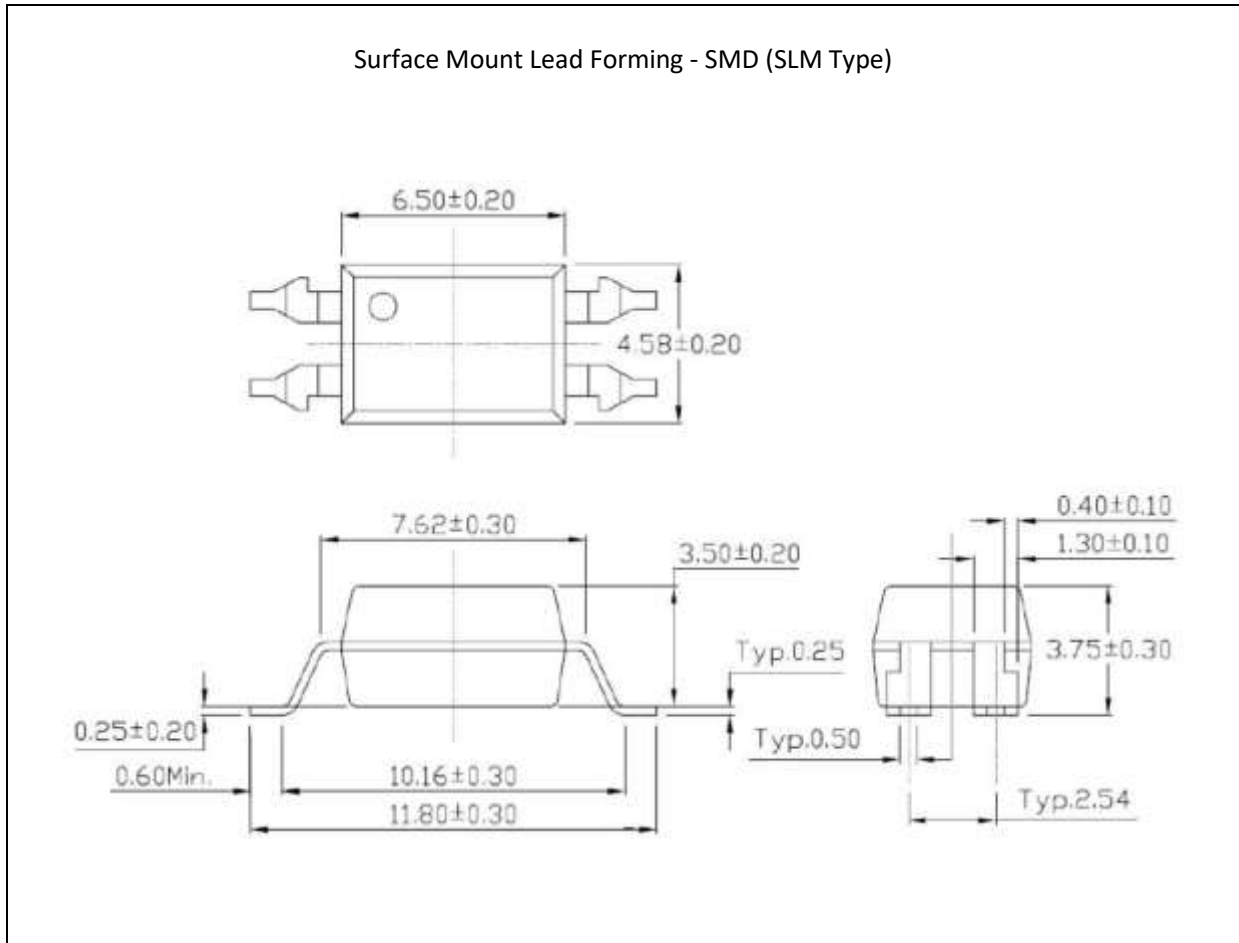

1. All dimensions are in millimetre (mm).


Recommended Soldering Mask:

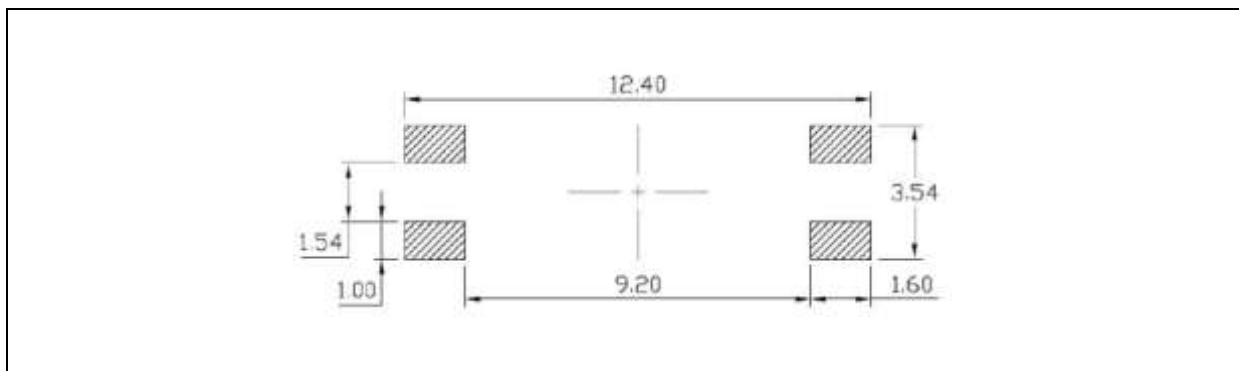

1. Dimensions are in millimetre (mm).

**PACKING SPECIFICATION:**


Reel Dimension:

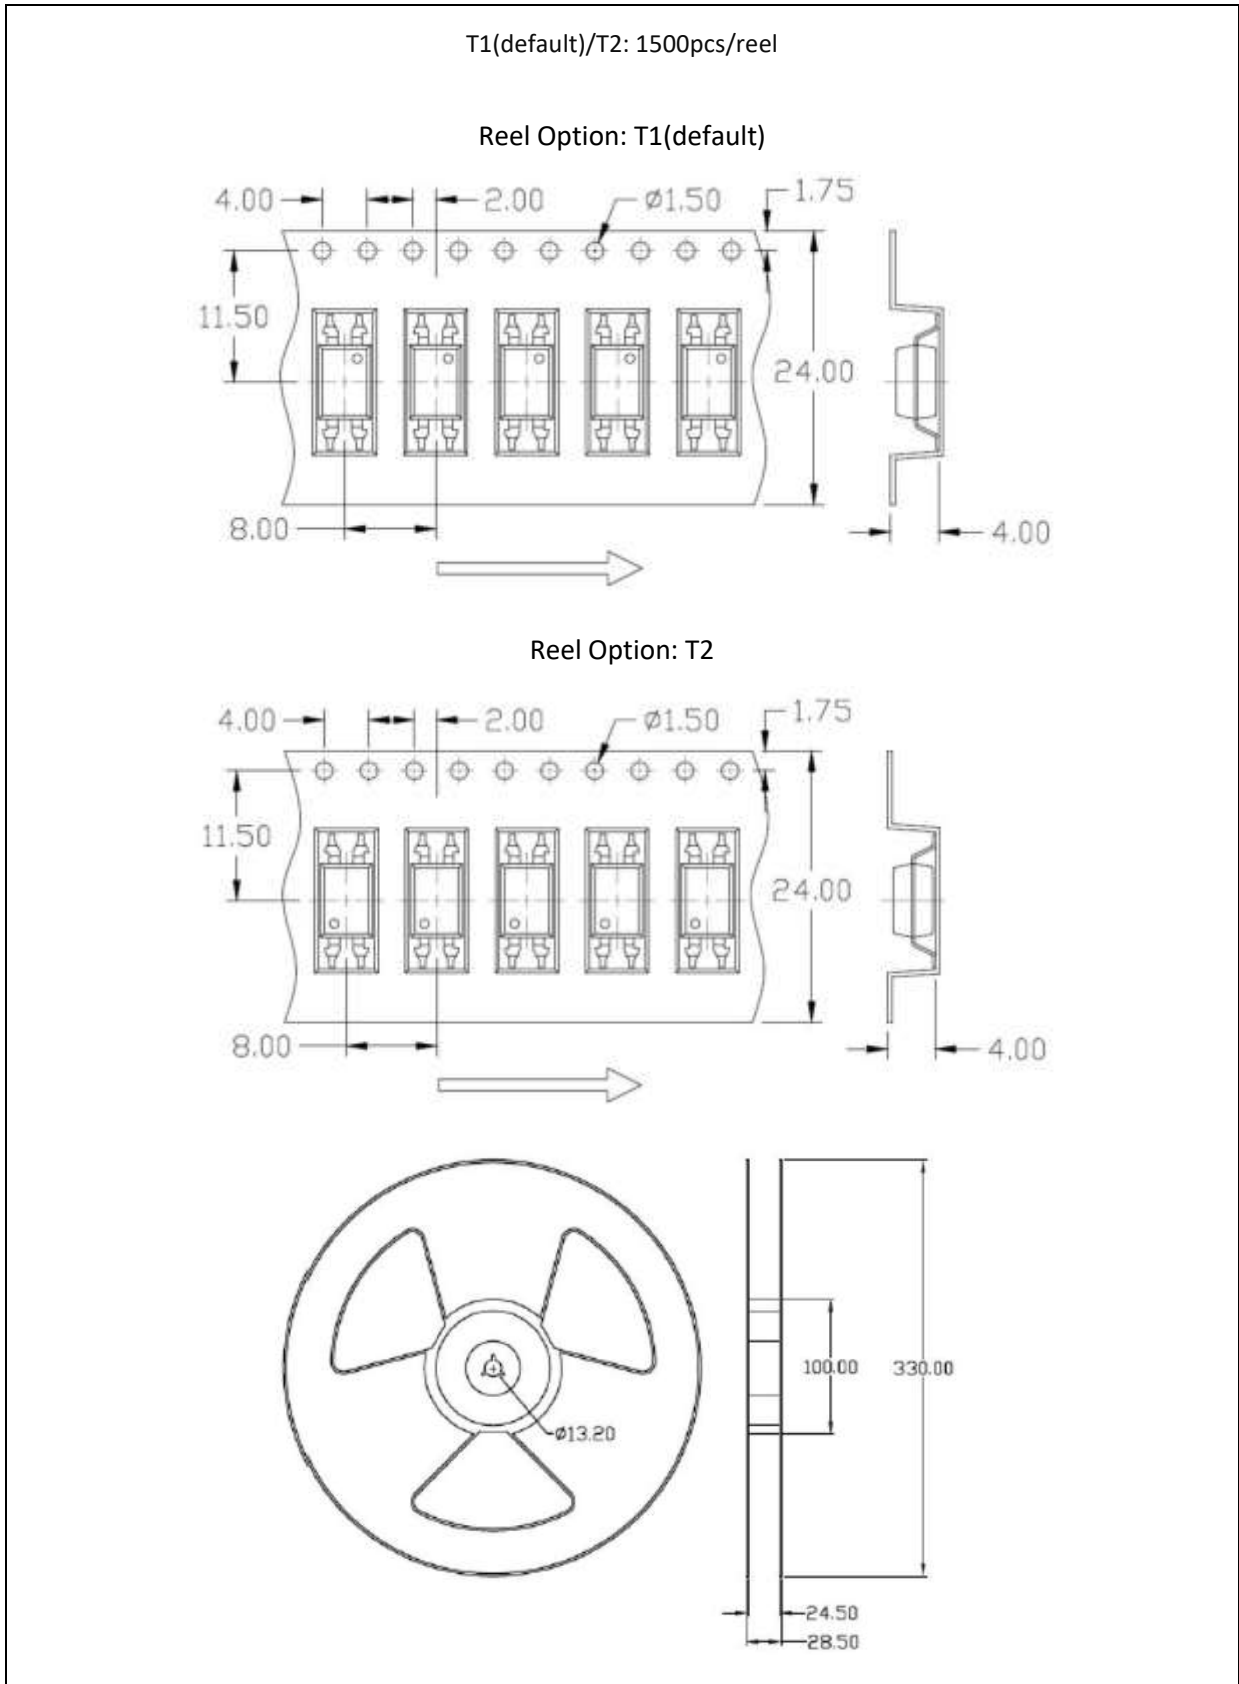


## PACKING SPECIFICATION:

Box Dimension:


T1/T2: 2 reels (3Kpcs)/inner box, 5 inner boxes (15Kpcs)/carton

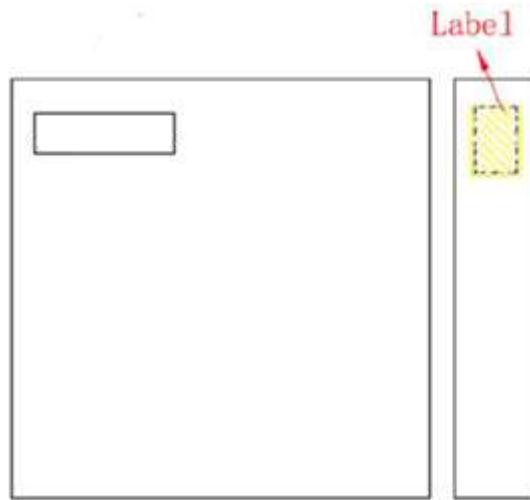

- L x W x H = 36cm x 36cm x 6.9cm

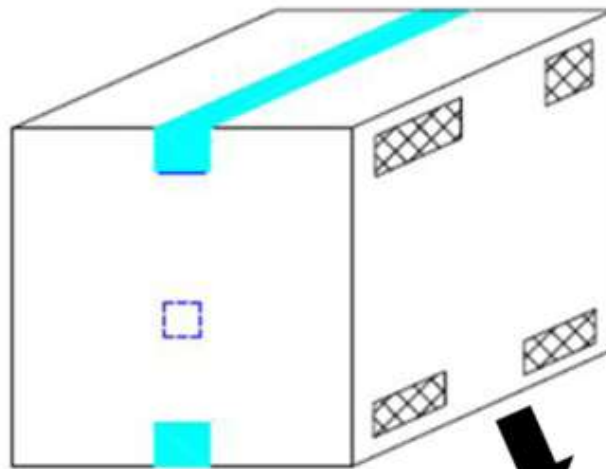


- L x W x H = 45cm x 38cm x 38cm




## RECOMMENDED SOLDERING PROFILE:

Reflow Information:

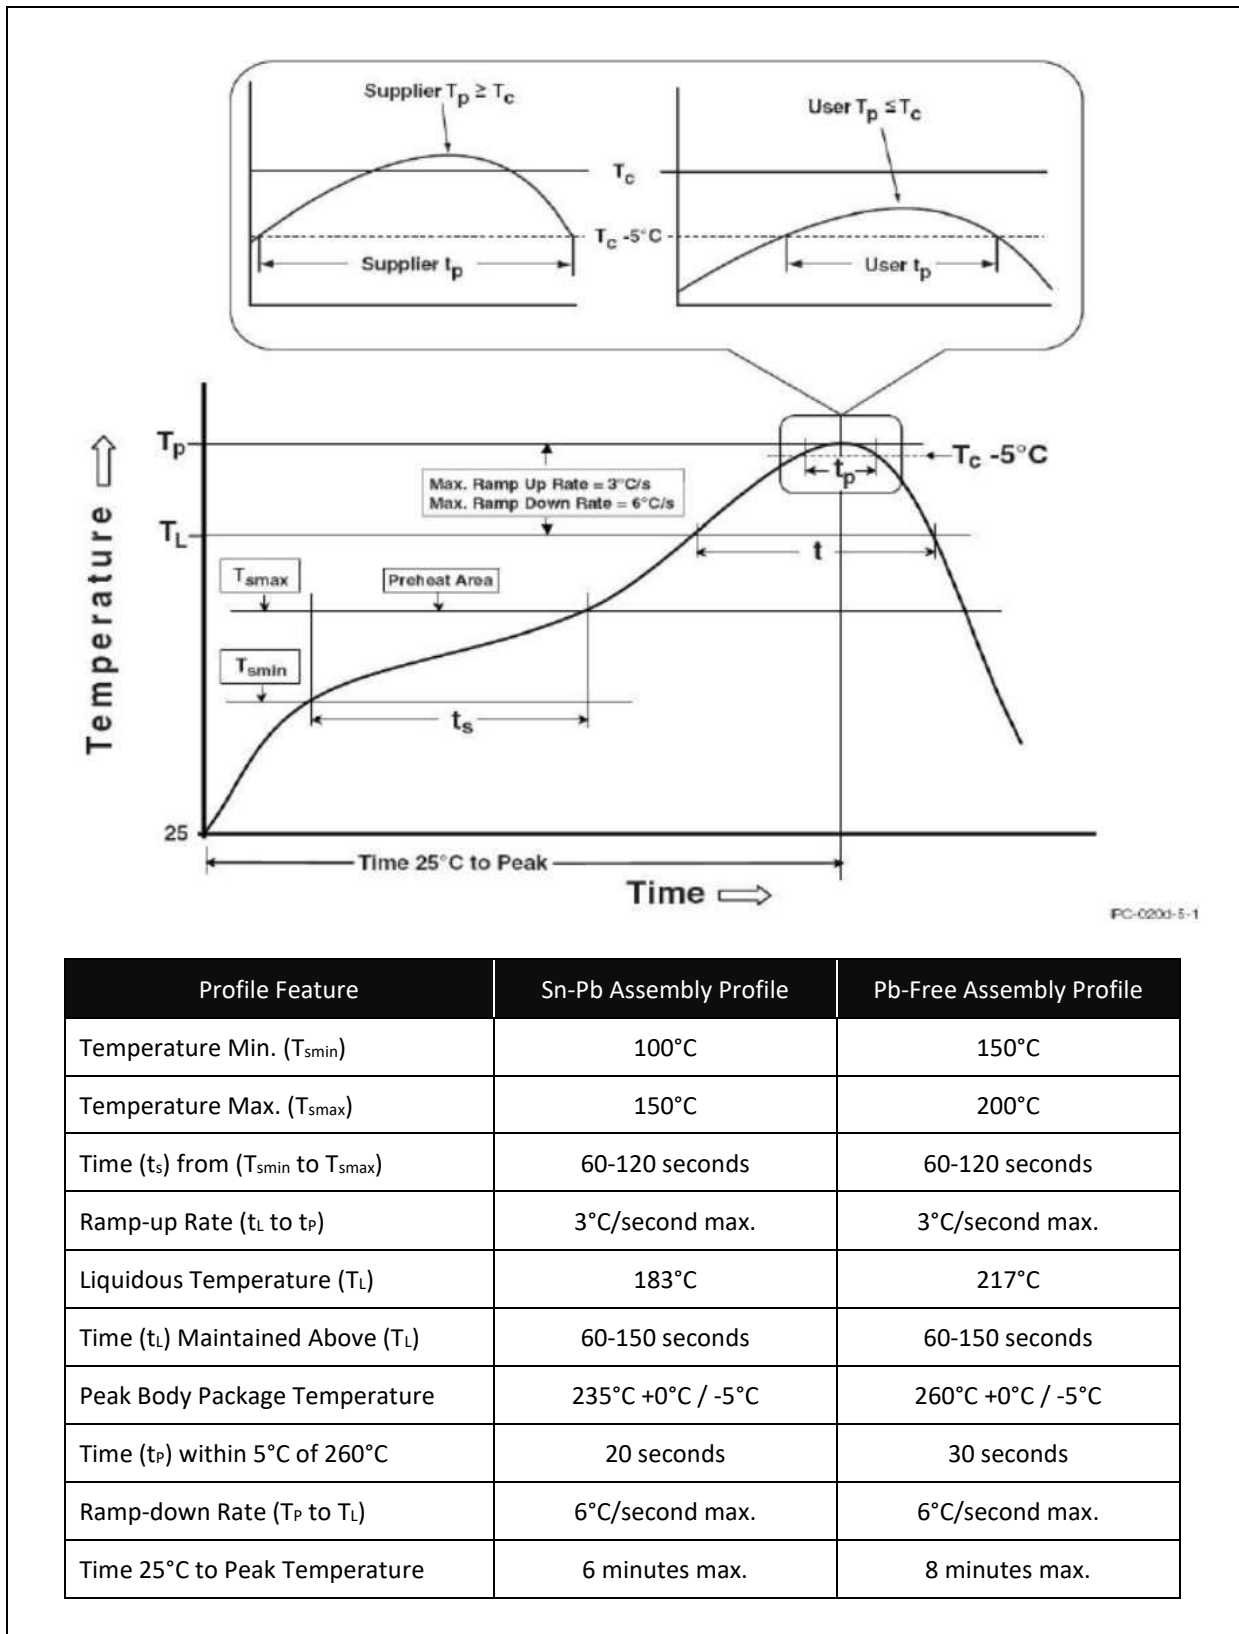

## RECOMMENDED SOLDERING PROFILE:

Wave Soldering (JESD22-A111 Compliant):

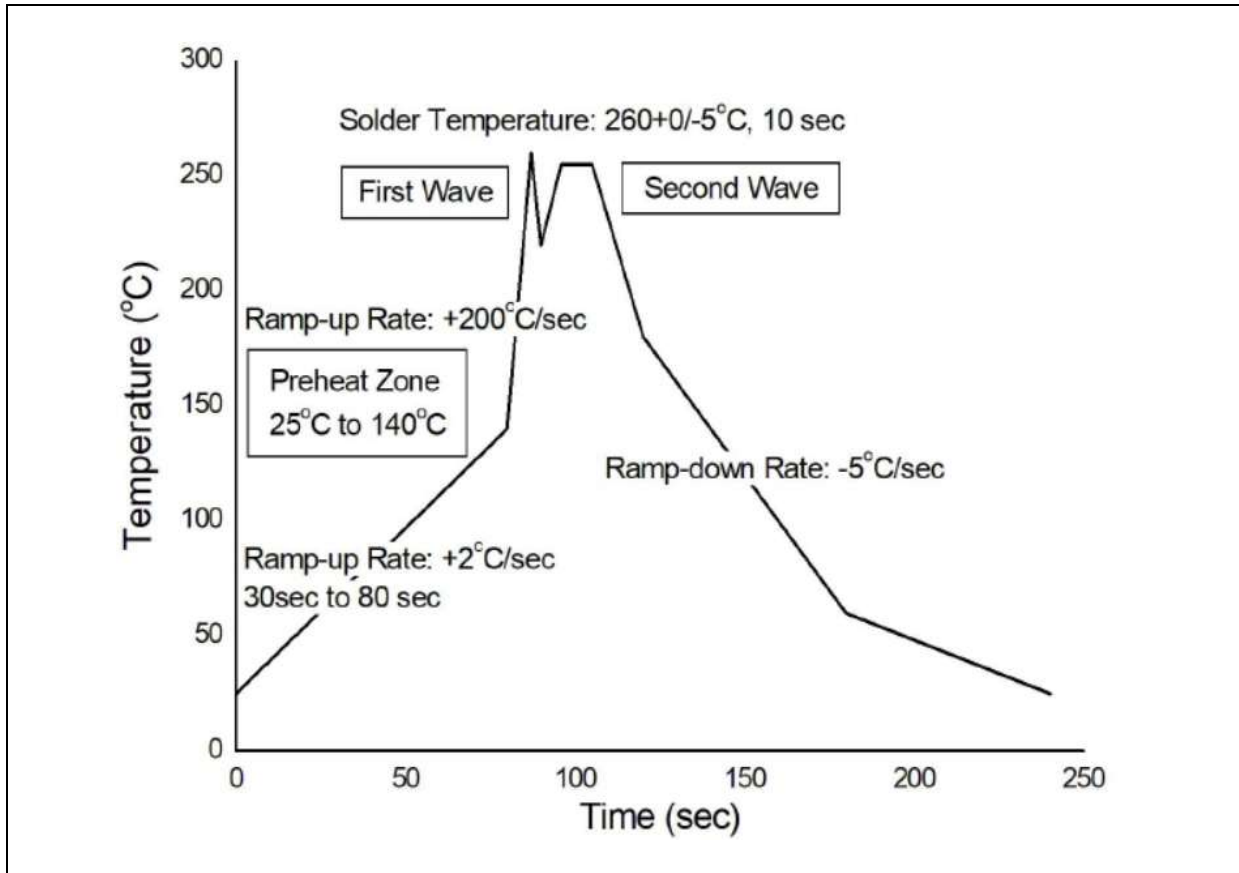

Hand Soldering:

Soldering Temperature	380±5°C
Soldering Time	3 sec max.

Note:

- One time soldering is recommended for all soldering methods.
- Do not solder more than three times for IR reflow soldering.