


# SURFACE MOUNT LED LAMPS

## SMD Chip LED Lamps




Part NO.:

Code NO.: N0D38S94

### Package outlines

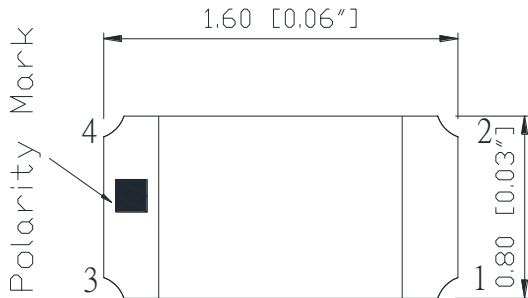

#### RECOMMEND PAD LAYOUT

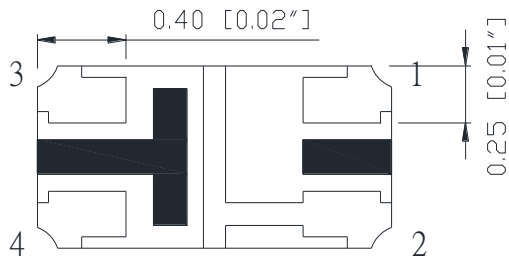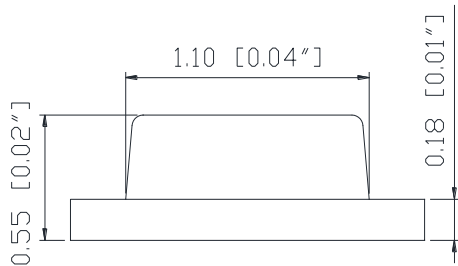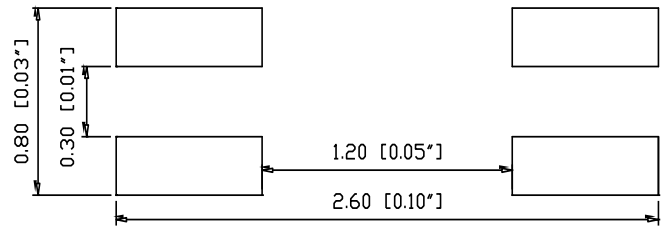

ITEM	MATERIALS	
Resin (mold)	Epoxy	
Lens color	Water transparent	
Dice	IR	AlGaAs/AlGaAs
	Orange	AlGaInP

#### NOTES:

- All dimensions are in millimeters (inches);
- Tolerances are  $\pm 0.1\text{mm}$  (0.004inch) unless otherwise noted.

Rev :	Date	Drawn by :	Checked by :	Approved by :
A	2016/12/26	唐云	李用基	黃靜文

# SURFACE MOUNT LED LAMPS

Part NO.:

Code NO.: N0D38S94

## Absolute maximum ratings

( $T_A=25^{\circ}\text{C}$ )

Parameter	Symbol	Value		Unit
		IR	O	
Power dissipation	Pd	90	75	mW
Forward current	If	50	30	mA
Reverse voltage	Vr	5		V
Operating temperature range	Top	-40 ~+80		$^{\circ}\text{C}$
Storage temperature range	Tstg	-40 ~+85		$^{\circ}\text{C}$
Peak pulsing current (1/8 duty f=1kHz)	Ifp	125		mA

## Electro-optical characteristics

( $T_A=25^{\circ}\text{C}$ )

Parameter	Test Condition	Symbol	Value			Unit
			Min	Typ	Max	
Wavelength at peak emission	If=20mA	$\lambda_{\text{peak}}$ O IR	-- 840	630 845	-- 860	nm
Spectral half bandwidth	If=20mA	$\Delta\lambda$ O IR	-- --	20 43	-- --	nm
Dominant wavelength	If=20mA	$\lambda_{\text{dom}}$ O IR	615 --	622 --	630 --	nm
Forward voltage	If=20mA	Vf O IR	1.7 1.0	2.0 1.4	2.5 1.8	V
Luminous intensity	If=20mA	Iv O	50	95	160	mcd
		Po IR	0.1	0.8	1.6	mW/sr
Viewing angle at 50% Iv	If=10mA	$2\theta_{1/2}$	--	140	--	Deg
Reverse current	Vr=5V	Ir	--	--	10	$\mu\text{A}$


# SURFACE MOUNT LED LAMPS

Part NO.:


Code NO.: N0D38S94

## OPTICAL CHARACTERISTIC CURVES (Orange)


Relative Intensity vs. Wavelength

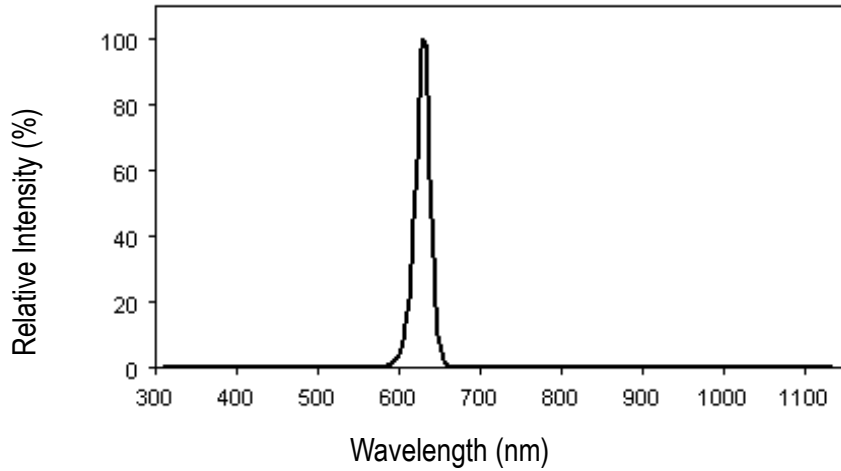

Forward Current vs. Forward Voltage

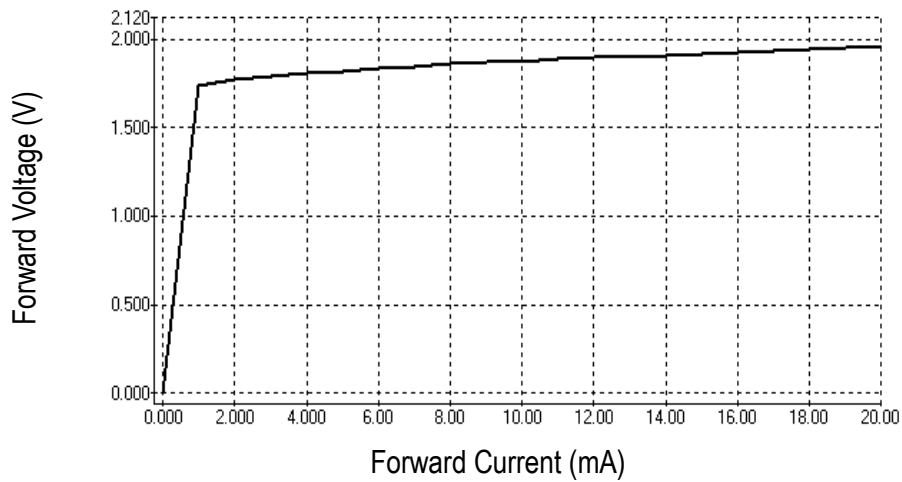

Directive Characteristics

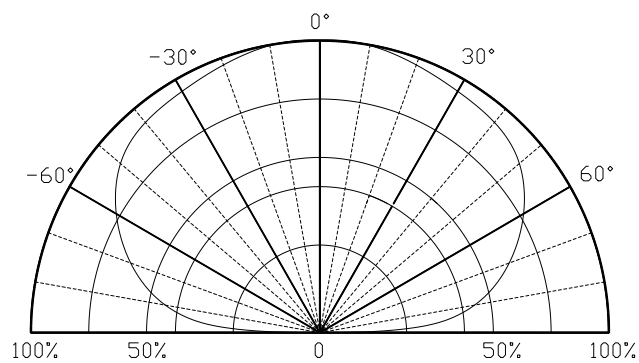


# SURFACE MOUNT LED LAMPS

Part NO.:


Code NO.: N0D38S94

## OPTICAL CHARACTERISTIC CURVES (IR)


Relative Intensity vs. Wavelength

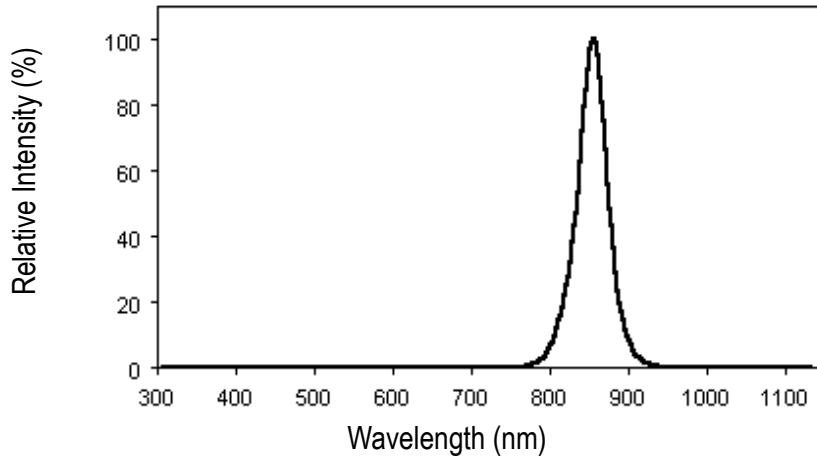

Forward Current vs. Forward Voltage

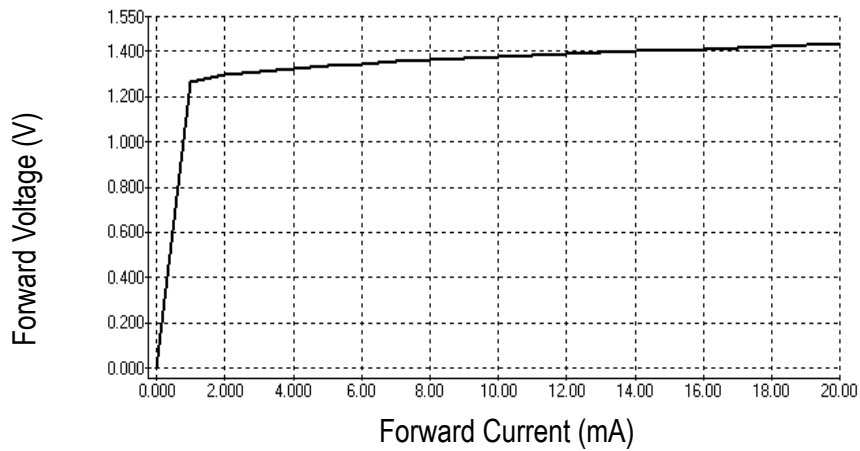


Directive Characteristics

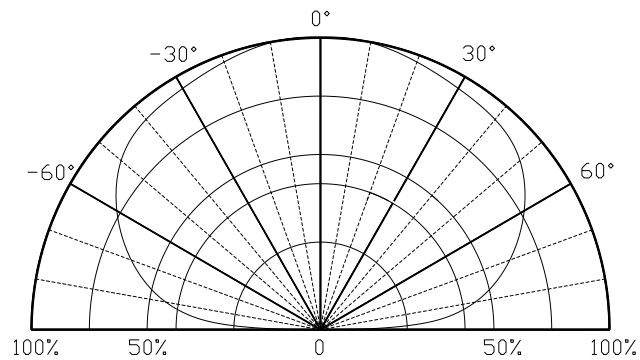

# SURFACE MOUNT LED LAMPS

## Reflow Profile

### ■ Reflow Temp/Time

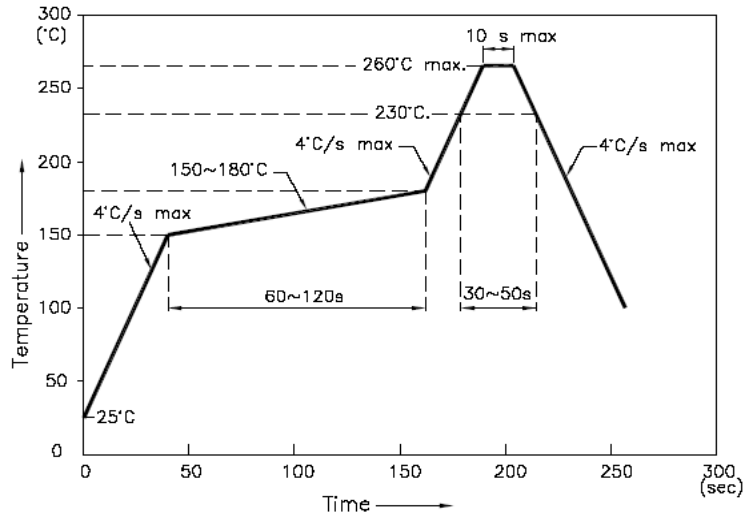

### NOTES:


1. We recommend the reflow temperature  $245^{\circ}\text{C} (\pm 5^{\circ}\text{C})$ . the maximum soldering temperature should be limited to  $260^{\circ}\text{C}$ .
2. dont cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

### ■ Soldering iron

Basic spec is  $\leq 5\text{sec}$  when  $260^{\circ}\text{C}$ . If temperature is higher, time should be shorter ( $+10^{\circ}\text{C} \rightarrow -1\text{sec}$ ). Power dissipation of iron should be smaller than 20W, and temperatures should be controllable. Surface temperature of the device should be under  $230^{\circ}\text{C}$ .

### ■ Rework

1. Customer must finish rework within 5 sec under  $260^{\circ}\text{C}$ .
2. The head of iron can not touch copper foil
3. Twin-head type is preferred.

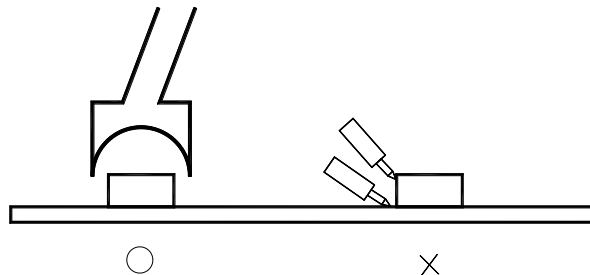


- Avoid rubbing or scraping the resin by any object, during high temperature, for example reflow、solder etc.

# SURFACE MOUNT LED LAMPS

## Test circuit and handling precautions

### ■ Test circuit

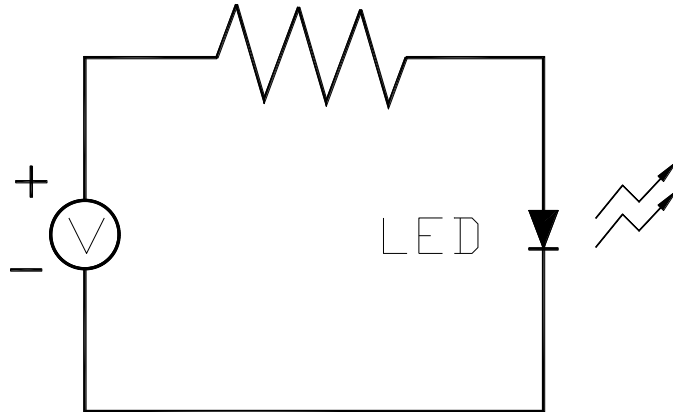

### ■ Handling precautions

#### 1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Shelf life in sealed bag: 12 month at  $5^{\circ}\text{C}\sim 30^{\circ}\text{C}$  and  $< 60\%$  R.H;

3. After the package is Opened:

3.1. It is recommended to baking before the first use:

Baking condition:

a.  $60\pm 5^{\circ}\text{C}$  x (24~48hrs) and  $< 5\%$  RH, taped reel type ;

b.  $110\pm 5^{\circ}\text{C}$  x (8~16hr), bulk type ;

3.2. The products should be used within a week and to be stored at  $\leq 20\%$  R.H. with zip-lock sealed:

a. Baking is required before soldering when the pack is unsealed after 24hrs ;

b. Baking condition as 3.1 baking condition.

# SURFACE MOUNT LED LAMPS


## Test items and results of reliability

Type	Test Item	Test Conditions	Note	Number of Damaged
Environmental Sequence	Temperature Cycle	-20°C 30min ↑ ↓ 80°C 30min	100 cycle	0/22
	Thermal Shock	-20°C 15min ↑ ↓ 80°C 15min	100 cycle	0/22
	High Humidity Heat Cycle	30°C ↔ 65°C 90%RH 24hrs/1cycle	10 cycle	0/22
	High Temperature Storage	T <sub>a</sub> =80°C	1000 hrs	0/22
	Humidity Heat Storage	T <sub>a</sub> =60°C RH=90%	1000 hrs	0/22
	Low Temperature Storage	T <sub>a</sub> =-30°C	1000 hrs	0/22
Operation Sequence	Life Test	T <sub>a</sub> =25°C I <sub>F</sub> =20mA	1000 hrs	0/22
	High Humidity Heat Life Test	60°C RH=90% I <sub>F</sub> =10mA	500 hrs	0/22
	Low Temperature Life Test	T <sub>a</sub> =-20°C I <sub>F</sub> =20mA	1000 hrs	0/22


# PACKAGING SPECIFICATIONS

## SMD Chip LED Lamps Packaging Specifications


### ● Feeding Direction

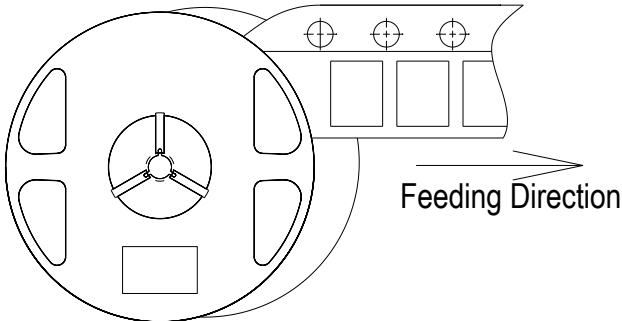


### ● Dimensions of Reel (Unit: mm)

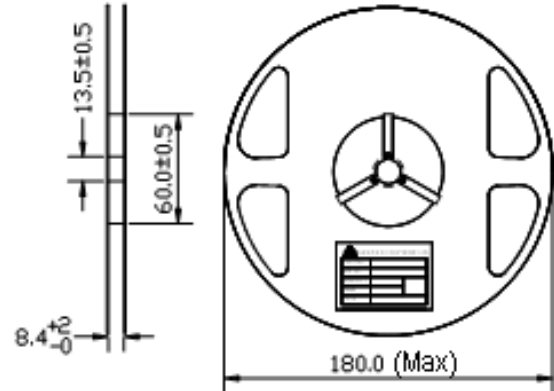

### ● Dimensions of Tape (Unit: mm)

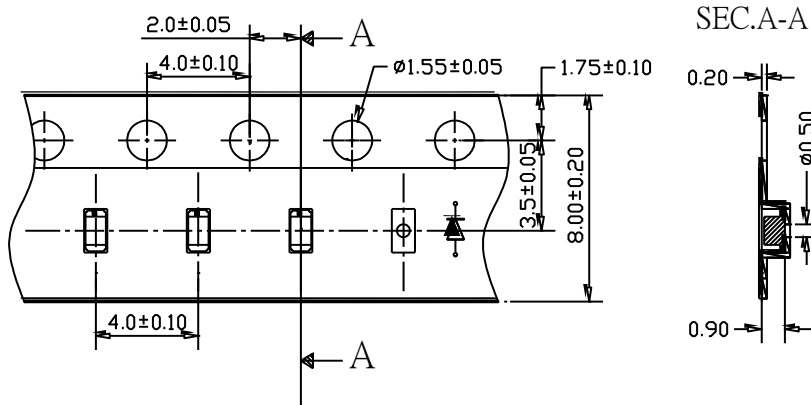

### ● Arrangement of Tape

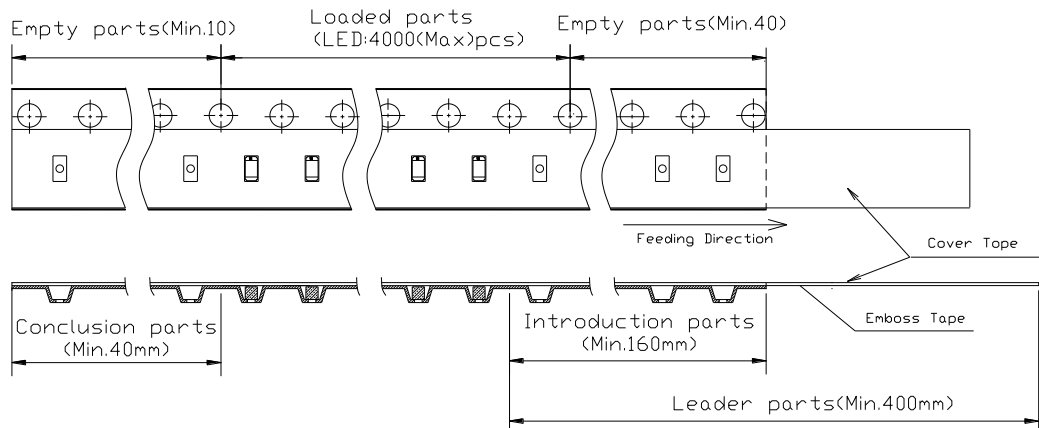

### NOTES


1. Empty component pockets are sealed with top cover tape;
2. The maximum number of missing lamps is two;
3. The cathode is oriented towards the tape sprocket hole.
4. 4,000(Max)pcs/Reel
5. Packing will be multiple of 500, e.g 500pcs/R, 1000pcs/R, 1500pcs/R..etc , MAX 4000pcs/R



# PACKAGING SPECIFICATIONS

## SMD Chip LED Lamps Packaging Specifications

- **Packaging specifications**

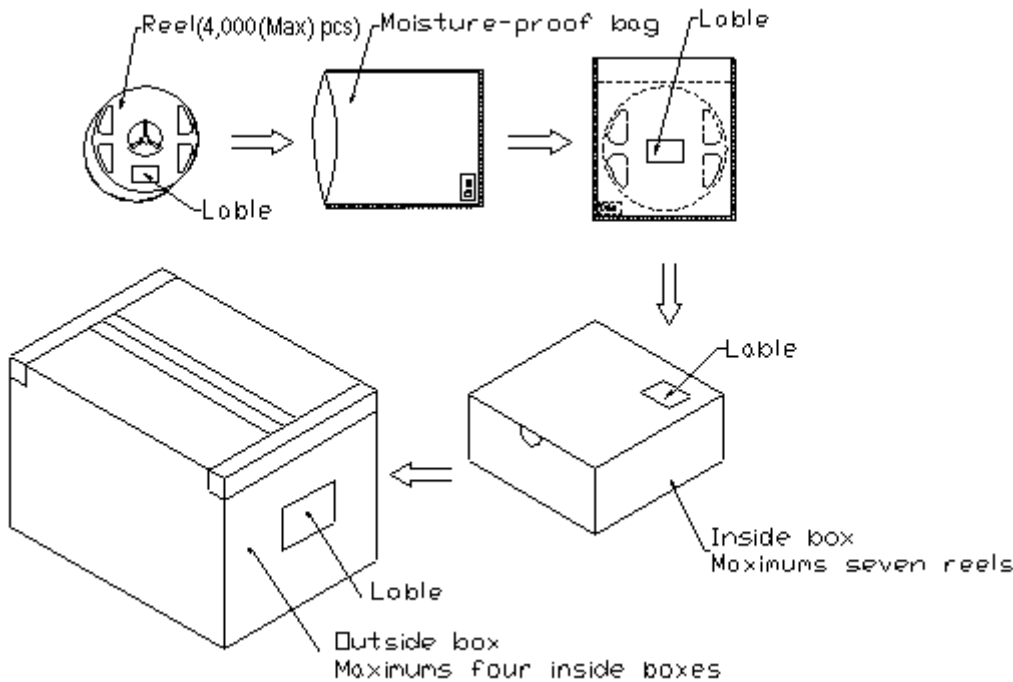

### NOTES:

Reeled products [numbers of products are 4,000(Max)pcs] packed in a seal off moisture-proof bag along with a desiccant one by one, Seven moisture-proof bag of maximums [total maximum number of products are 28,000(Max)pcs] packed in an inside box (size: about 238mm x about 194mm x about 102mm) and four inside boxes of maximums are put in the outside box (size: about 410mm x about 254mm x about 229mm) Together with buffer material, and it is packed. (Part No., Lot No., quantity should appear on the label on the moisture-proof bag, part No. And quantity should appear on the label on the cardboard box.) The number of the loading steps of outside box (cardboard box) has it to three steps.

# SURFACE MOUNT LED LAMPS

Part NO.:

Code NO.: N0D38S94

## Forward Voltage Rank Combination (IF=20mA)

Rank Code		Min.	Max.	Unit
Orange	<input type="checkbox"/>	1.7	2.5	V
IR	<input type="checkbox"/>	1.0	1.8	

## Luminous Intensity Rank Combination (IF=20mA)

Rank Code		Min.	Max.	Unit
Orange	G	50	63	mcd
	H	63	80	
	I	80	100	
	J	100	125	
	K	125	160	
IR	A	0.10	0.60	
	B	0.60	1.10	
	C	1.10	1.60	

## Dominant/Peak wavelength Rank Combination (IF=20mA)

Rank Code		Min.	Max.	Unit
Orange	s	615	620	nm
	t	620	625	
	u	625	630	
IR	<input type="checkbox"/>	840	860	

## Group Name on Label ( Example DATA: It B 20 )

DATA: <input type="checkbox"/> It <input type="checkbox"/> B <input type="checkbox"/> 20 Orange IR	Vf(V)	Iv (mcd)/ Po(mW/sr)	$\lambda$ d/ $\lambda$ p (nm)	Test Condition
Orange <input type="checkbox"/> →I→t→20	1.7~2.5	80~100	620~625	IF=20mA
IR <input type="checkbox"/> →B→ <input type="checkbox"/> →20	1.0~1.8	0.6~1.1	840~860	

### \* NOTE:

1. The tolerance of luminous intensity (Iv) is  $\pm 15\%$  .
2. The tolerance of dominant wavelength/Peak wavelength is  $\pm 1.5\text{nm}$ .
3. This specification is preliminary.