



**BRIGHTTEK**  
**BRIGHTTEK (EUROPE) LIMITED**

*Brighten up The World With LED!*



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

## PRODUCT DATASHEET




- ▶ PCB / CHIP LED
- ▶ 1210 (3025) 1.5t Series
- ▶ Red (640nm) / Blue (470nm)

NOD59S26



Release Date: 21 May 2021 Version: A1.0

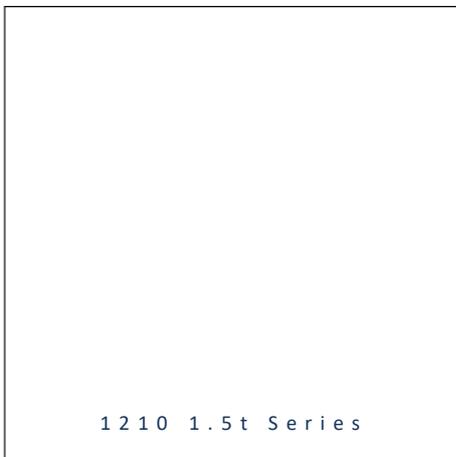

1210 1.5t Series

### 1210 1.5t Series

**RoHS**  
Compliant



#### FEATURES (Red/Blue):

- **Package:** PCB / CHIP Top View Bi-Colour LED
- **Forward Current:** 20/20mA\*
- **Forward Voltage (typ.):** 2.0/3.0V
- **Luminous Intensity (typ.):** 860/440mcd@20mA
- **Colour:** Red/Blue
- **Wavelength:** 640/470nm
- **Viewing angle:** 40°
- **Materials:**
  - Die: AlGaInP on GaAs/InGaN
  - Resin: Epoxy (Water Clear)
- **Operating Temperature:** -40~+80°C
- **Storage Temperature:** -40~+85°C
- **Grouping parameters:**
  - Forward voltage
  - Luminous intensity
  - Dominant Wavelength
- **Soldering methods:** Reflow soldering
- **Preconditioning:** acc. to JEDEC Level 3
- **Packing:** 12mm tape with max.3000/reel, ø180mm (7")

#### APPLICATIONS:

- Indicator
- Dashboard
- 3C Application
- Backlighting
- Decoration Lighting

\* In the order of Red/Blue.

## CHARACTERISTICS:

### Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Forward Current	I <sub>F</sub>	30/30*	mA
Peak Forward Current Duty 1/8@1KHz	I <sub>FP</sub>	125	mA
Reverse Voltage	V <sub>R</sub>	5	V
Reverse Current @5V	I <sub>R</sub>	10	μA
Power Dissipation	P <sub>D</sub>	75/111	mW
Operating Temperature	T <sub>OPR</sub>	-40~+80	°C
Storage Temperature	T <sub>STG</sub>	-40~+85	°C

- \* In the order of Red/Blue.


### Electrical & Optical Characteristics (Ta=25°C)

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V <sub>F</sub>	1.7/2.8*	2.0/3.0	2.5/3.7	V	I <sub>F</sub> =20mA
Luminous Intensity	I <sub>v</sub>	500/250	860/440	1600/800	mcd	I <sub>F</sub> =20mA
Dominant Wavelength	λ <sub>D</sub>	630/465	640/470	650/476	nm	I <sub>F</sub> =20mA
Peak Wavelength	λ <sub>P</sub>	---	656/465	---	nm	I <sub>F</sub> =20mA
Spectral Line Half Bandwidth	Δλ	---	21/25	---	nm	I <sub>F</sub> =20mA
Viewing Angle	2θ <sub>1/2</sub>	---	40	---	deg	I <sub>F</sub> =20mA

- \* In the order of Red/Blue.
- Luminous intensity (I<sub>v</sub>) ±15%, Forward Voltage (V<sub>F</sub>) ±0.1V


## OUTLINE DIMENSION:

Package Dimension:

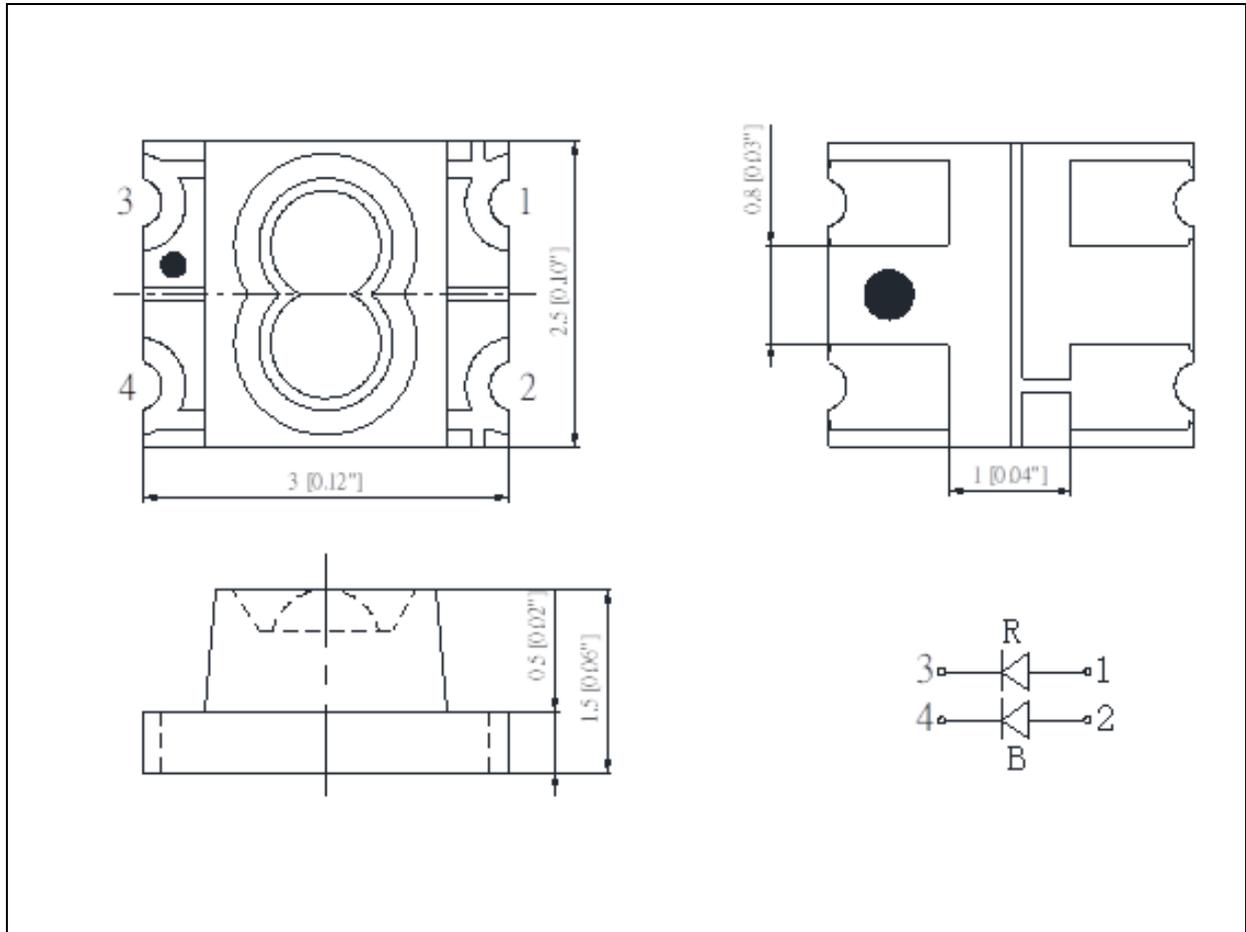

1. All dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.2\text{mm}$ , unless otherwise noted.

Recommended Soldering Pad Dimension:

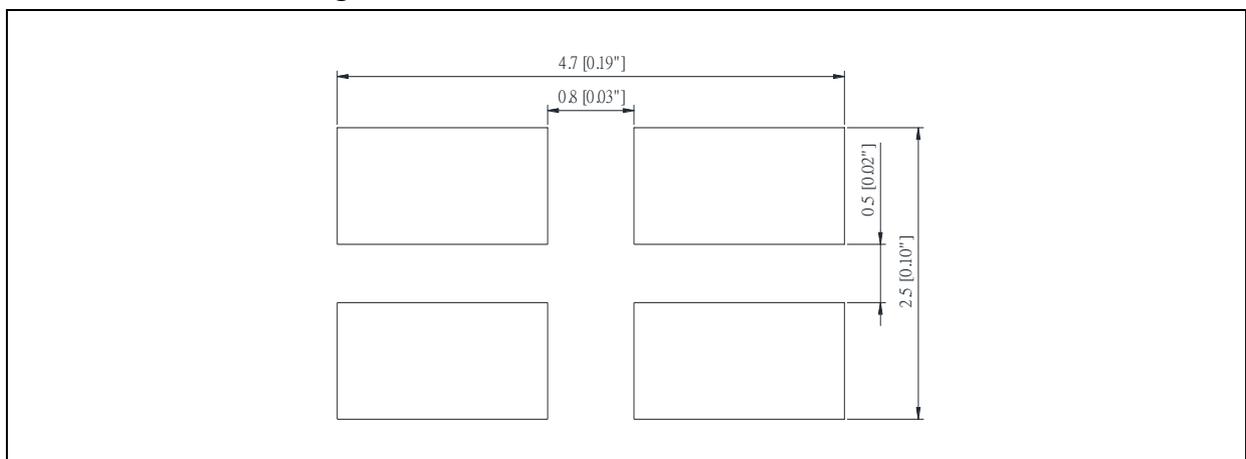

1. Dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.1\text{mm}$  with angle tolerance  $\pm 0.5^\circ$ .

**BINNING GROUPS:**

 Forward Voltage Classifications ( $I_F = 20\text{mA}$ ):

	Code	Min.	Max.	Unit
Red	□	1.7	2.5	V
Blue	f	2.8	3.1	V
	g	3.1	3.4	
	h	3.4	3.7	

 Luminous Intensity Classifications ( $I_F = 20\text{mA}$ ):

	Code	Min.	Max.	Unit
Red	Q	500	630	mcd
	R	630	800	
	S	800	1000	
	T	1000	1250	
	U	1250	1600	
Blue	N	250	320	mcd
	O	320	400	
	P	400	500	
	Q	500	630	
	R	630	800	

 Wavelength Classifications ( $I_F = 20\text{mA}$ ):


	Code	Min.	Max.	Unit
Red	v	630	635	nm
	w	635	650	
Blue	G	465	467.5	nm
	H	467.5	470	
	I	470	472.5	
	J	472.5	475	

Example Group Name on Label:


- Sv gPH 20 = □ (1.7~2.5V) ► S (800~1000mcd) ► v (630~635nm) ► g (3.1~3.4V) ► P (400~500mcd) ► H (467.5~470nm) ► 20 ( $I_F=20\text{mA}$ )

**ELECTRO-OPTICAL CHARACTERISTICS (RED):**


Relative Spectral Distribution

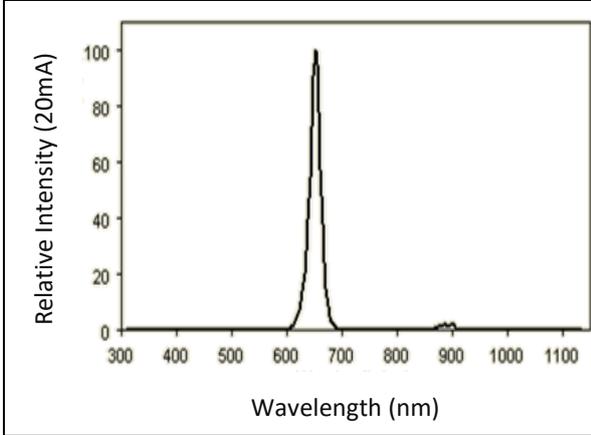

Forward Current v.s. Forward Voltage

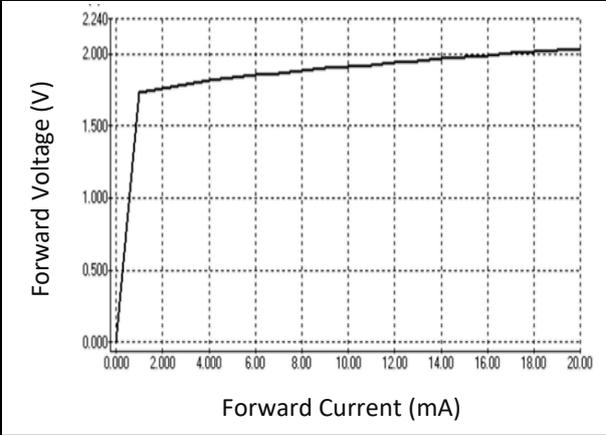


Directive Radiation

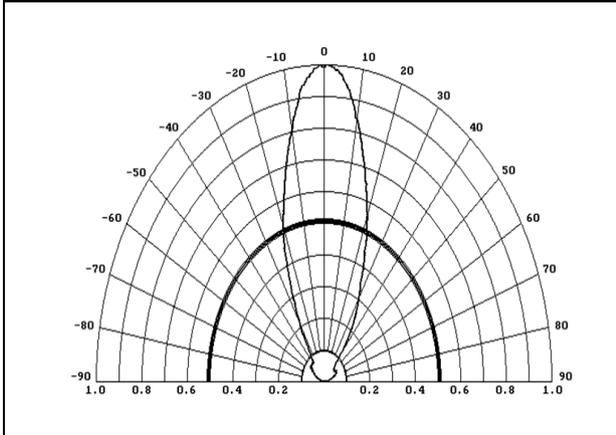


## ELECTRO-OPTICAL CHARACTERISTICS (BLUE):


Relative Spectral Distribution

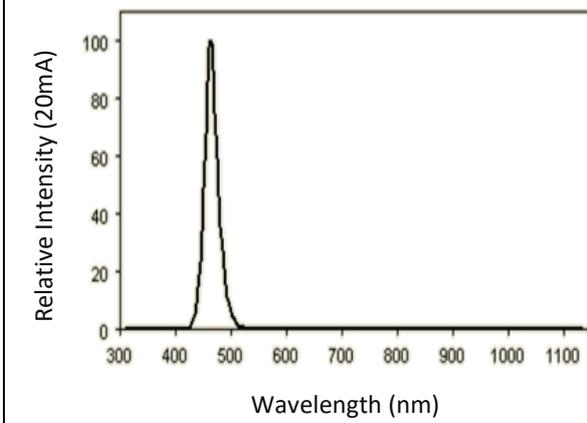

Forward Current v.s. Forward Voltage

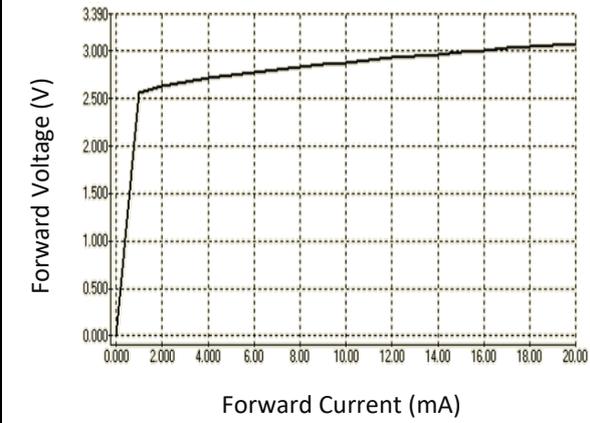


Directive Radiation

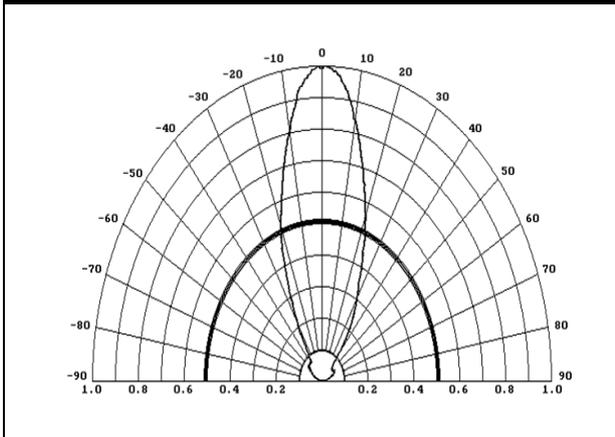

## RECOMMENDED SOLDERING PROFILE:

---

### Reflow Solder:

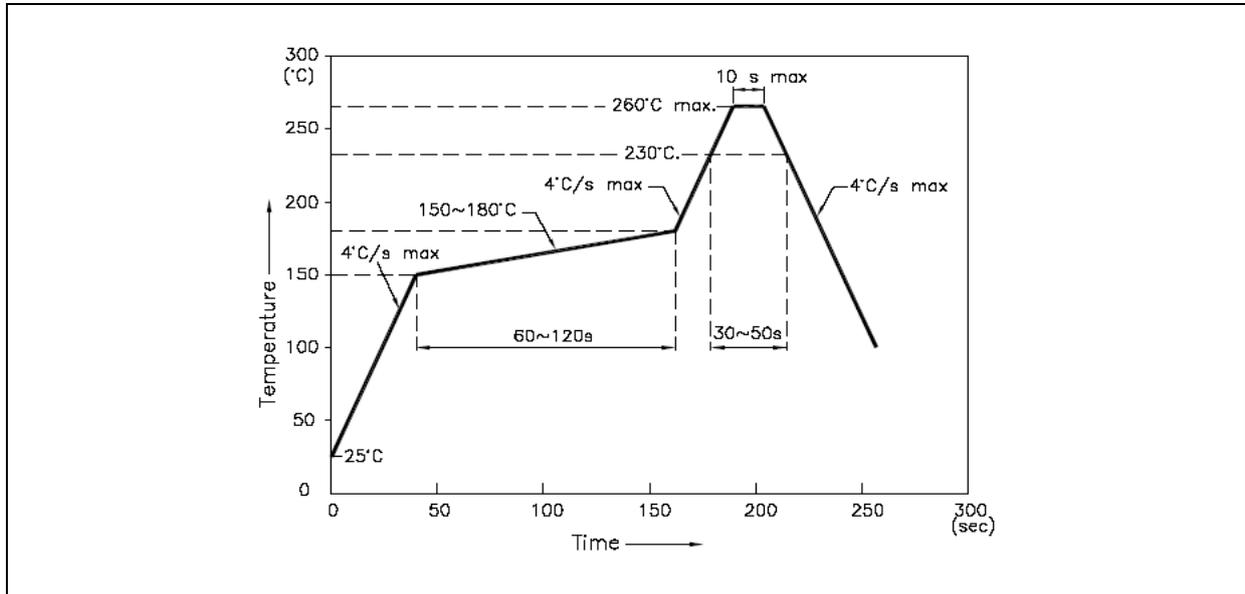


### Note:

1. Recommend reflow temperature 245°C. Maximum soldering temperature should be limited to 260°C.
2. Maximum reflow soldering: 2 times.
3. Before, during, and after soldering, should not apply stress on the components and PCB board.

# PACKING SPECIFICATION:

Reel Dimension:

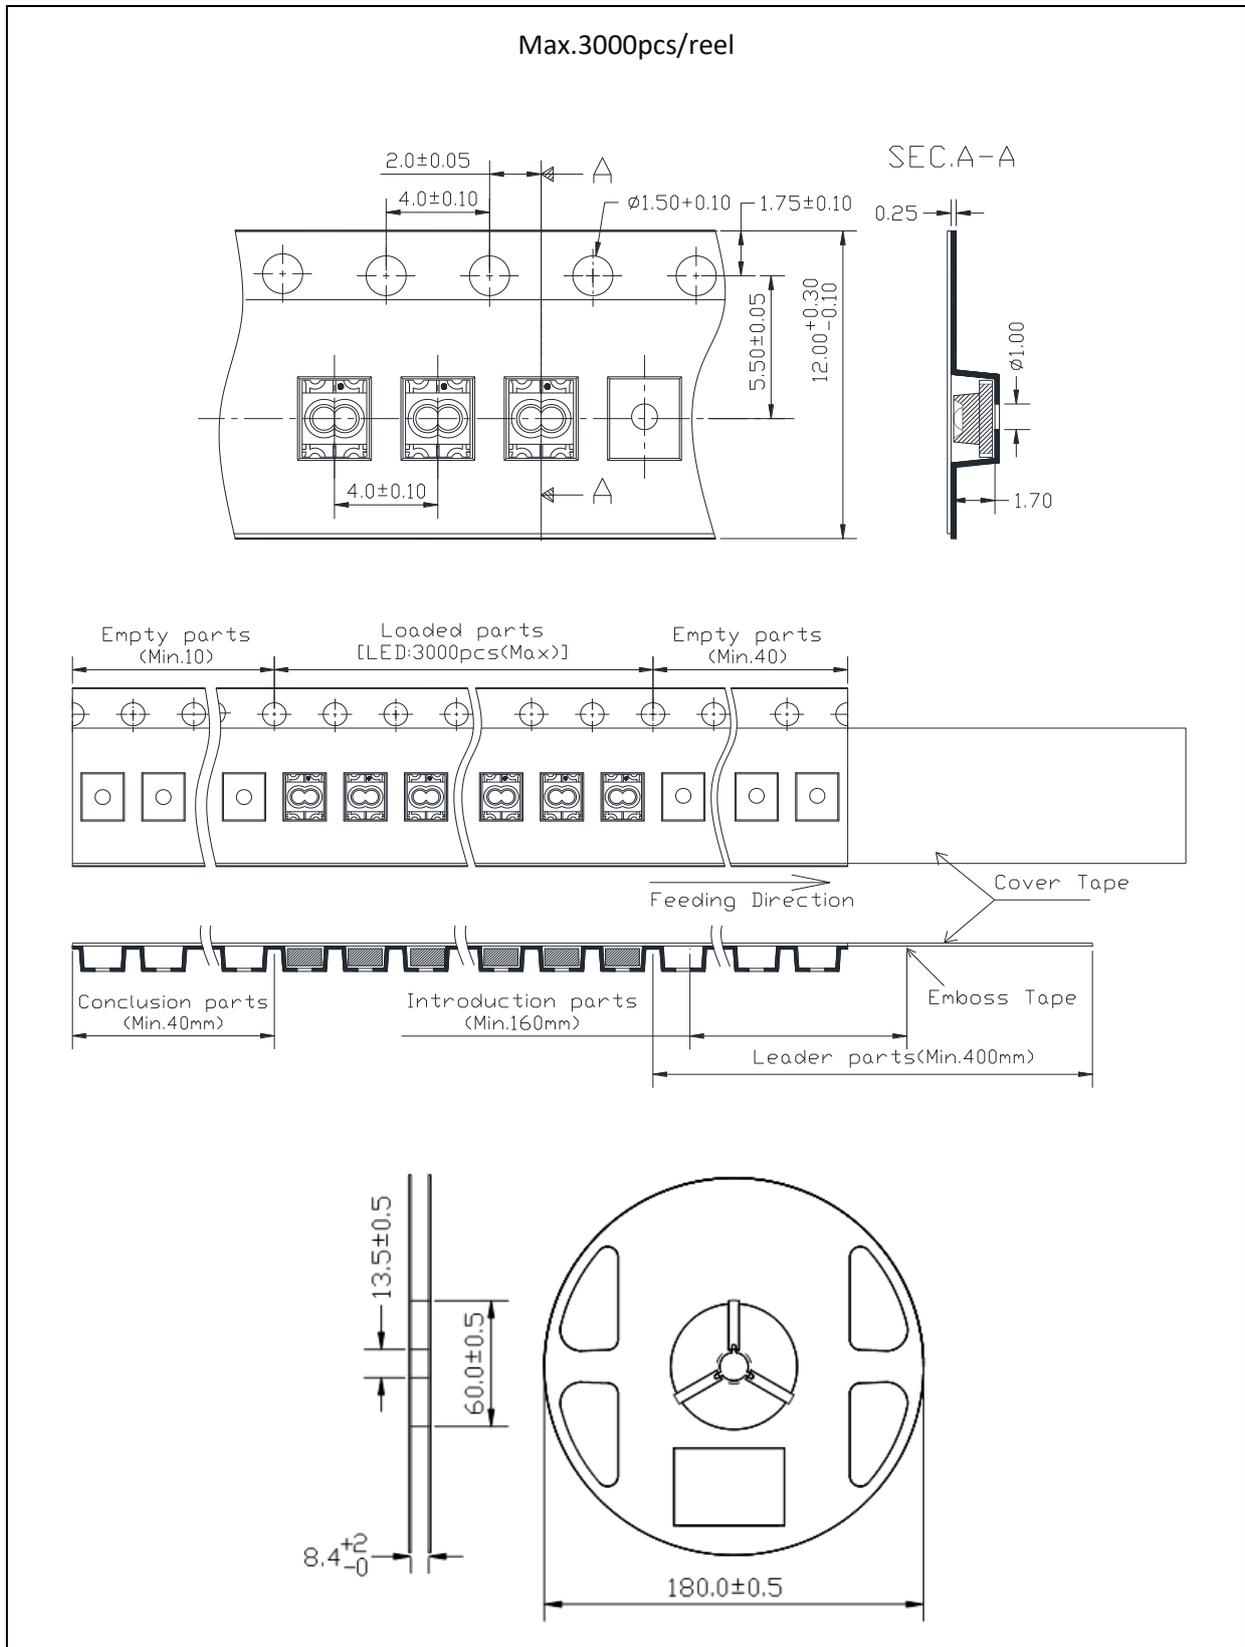

## PRECAUTIONS OF USE:

---

### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking.

### Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24 hours. The suggested baking conditions are as followings:

- 60±5°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light Blue) after baking in process.

### Testing Circuit:



Must apply resistor(s) for protection (over current proof).

### Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

**REVISION RECORD:**

---

Version	Date	Summary of Revision
A1.0	21/05/2021	Datasheet set-up.