



**BRIGHTTEK**  
**BRIGHTTEK (EUROPE) LIMITED**

*Brighten Up The World With LED!*



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

## PRODUCT DATASHEET



- ▶ SMC High Power
- ▶ 3030 SMC 3.0t Series
- ▶ Infrared (IR) 830nm

NOF60S25



Release Date: 08 December 2021 Version: A1.0



### 3030 SMC Series

**RoHS Compliant**



#### FEATURES:

- **Package:** TOP View SMC Package with Silicon Lens
- **Forward Current:** 150mA
- **Forward Voltage (typ.):** 1.8V
- **Luminous Flux (typ.):** 95mW@150mA
- **Colour:** Infrared
- **Wavelength:** 830nm
- **Viewing angle:** 30°
- **Materials:**
  - Die: AlGaInP
  - Resin: Silicon (Water Clear)
  - L/T Finish: Ag plated
- **Operating Temperature:** -40~+85°C
- **Storage Temperature:** -40~+100°C
- **Grouping parameters:**
  - Forward Voltage
  - Radiant Power
  - Peak Wavelength
- **Soldering methods:** IR Reflow
- **Preconditioning:** MSL2 according to J-STD020
- **Packing:** 12mm tape with max.650pcs Min./reel, ø180mm (7")

#### APPLICATIONS:

- Medical
- Cosmetics

**CHARACTERISTICS:**


---

## Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
DC Forward Current	I <sub>F</sub>	300	mA
Pulse Forward Current	I <sub>PF</sub>	500	mA
Reverse Voltage	V <sub>R</sub>	5	V
Reverse Current @5V	I <sub>R</sub>	10	μA
Junction Temperature	T <sub>J</sub>	125	°C
Electrostatic Discharge (HBM: MIL-STD-883 C2)	ESD	2000	V
Operating Temperature	T <sub>OPR</sub>	-40~+85	°C
Storage Temperature	T <sub>STG</sub>	-40~+100	°C
Soldering Temperature	T <sub>SOL</sub>	260	°C


## Electrical &amp; Optical Characteristics (Ta=25°C)

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V <sub>F</sub>	1.4	---	2.2	V	I <sub>F</sub> =150mA
Radiant Power	P <sub>O</sub>	80	---	125	mW	I <sub>F</sub> =150mA
Peak Wavelength	λ <sub>p</sub>	825	---	835	nm	I <sub>F</sub> =150mA
Viewing Angle	2θ <sub>1/2</sub>	---	30	---	deg	I <sub>F</sub> =150mA

1. Radiant Power (P<sub>O</sub>) ±7%, Forward Voltage (V<sub>F</sub>) ±0.1V, Viewing angle (2θ<sub>1/2</sub>) ±10°, Wavelength (λ<sub>p</sub>) ±1nm


## OUTLINE DIMENSION:

Package Dimension:

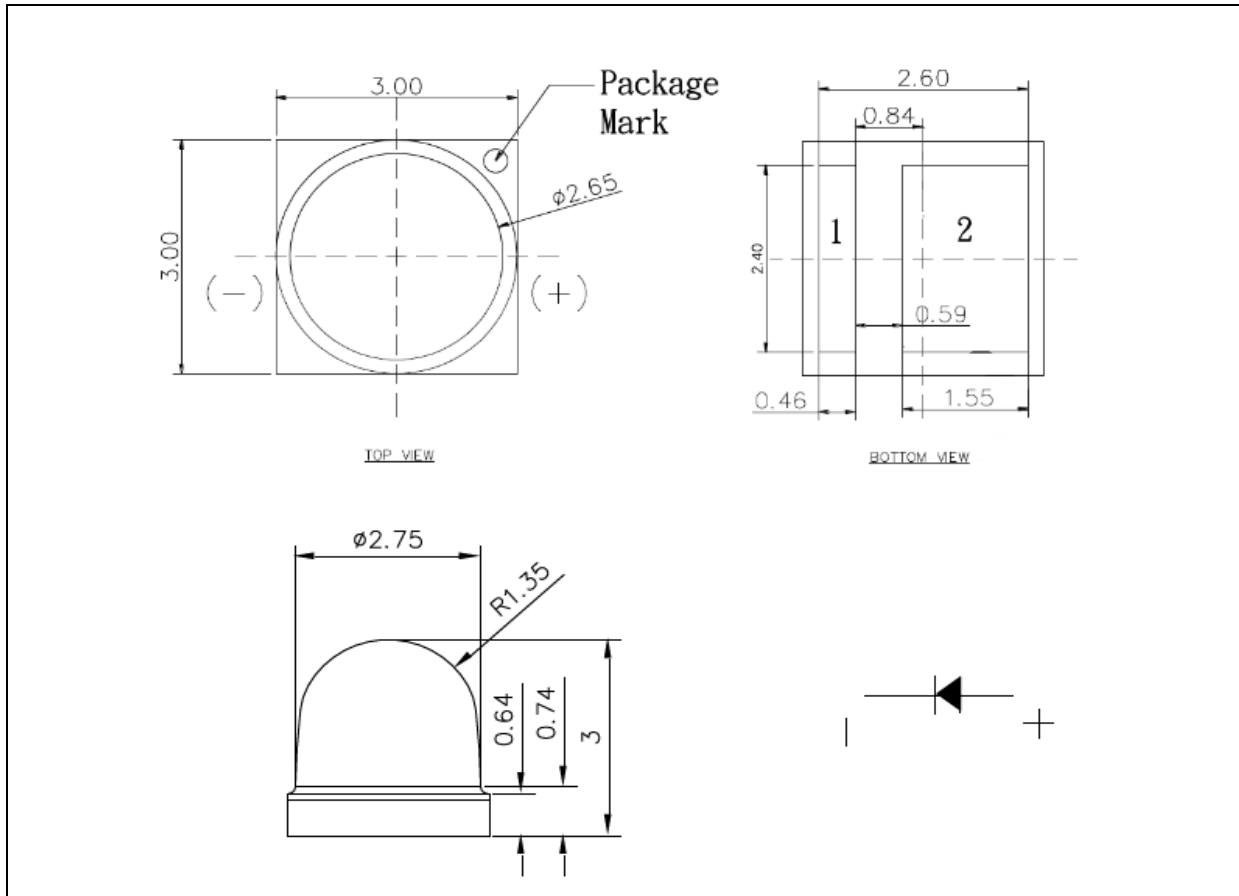

1. All dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.13$ mm, unless otherwise noted.

Recommended Soldering Pad Dimension:

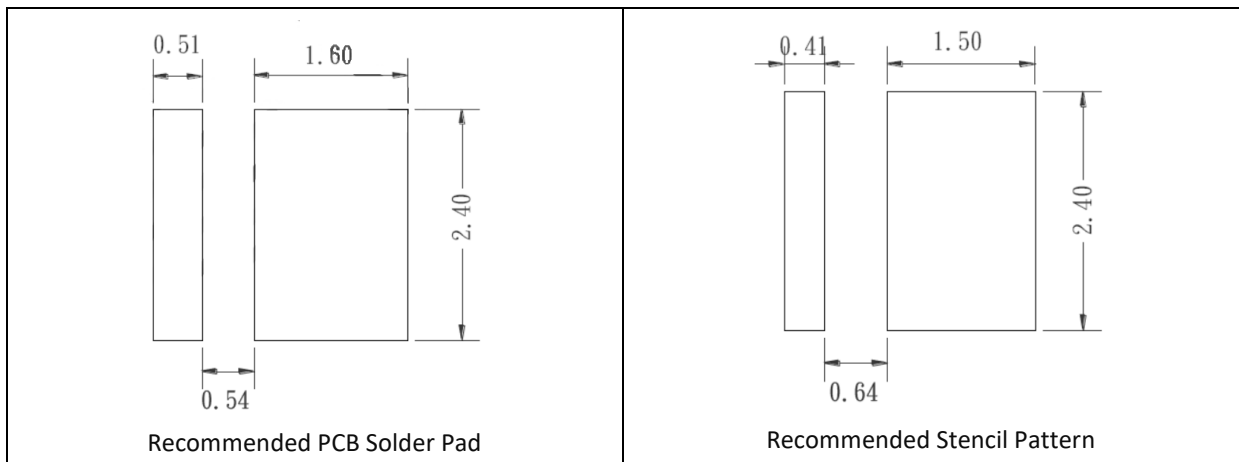

1. Dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.12$ mm with angle tolerance  $\pm 0.5^\circ$ .

**BINNING GROUPS:**


---

 Forward Voltage Classifications ( $I_F = 150\text{mA}$ ):

Code	Min.	Max.	Unit
V1416	1.4	1.6	V
V1618	1.6	1.8	
V1820	1.8	2.0	
V2022	2.0	2.2	

 Radiant Power Classifications ( $I_F = 150\text{mA}$ ):


Code	Min.	Max.	Unit
P09	80	90	mW
P10	90	100	
P11	100	125	

 Peak Wavelength Classifications ( $I_F = 150\text{mA}$ ):


Code	Min.	Max.	Unit
I825	825	835	nm

## ELECTRO-OPTICAL CHARACTERISTICS:


Relative Radiant Power v.s. Forward Current

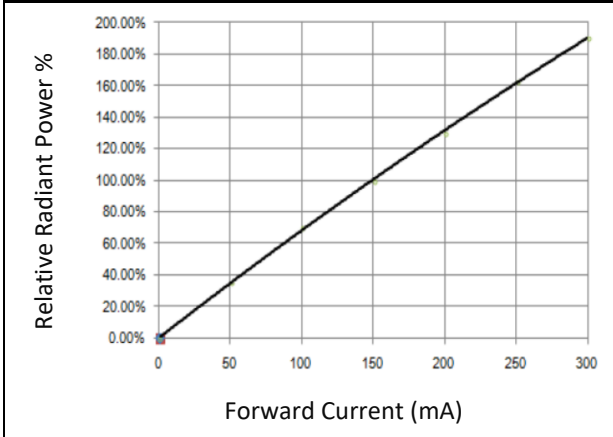


Forward Current v.s. Forward Voltage

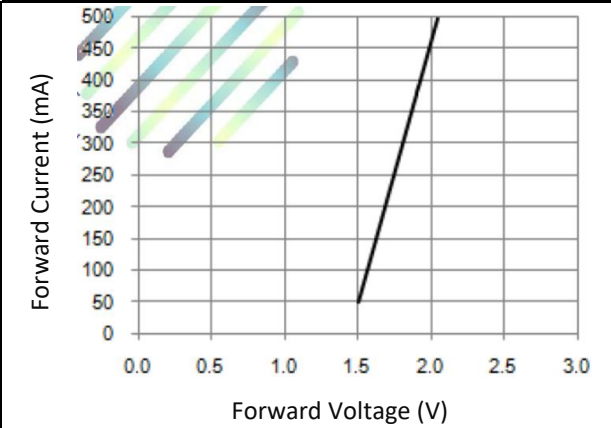



Relative Spectral Power v.s. Wavelength

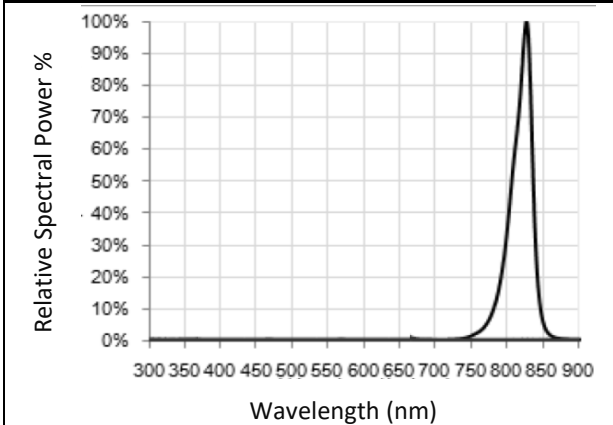

Directive Radiation

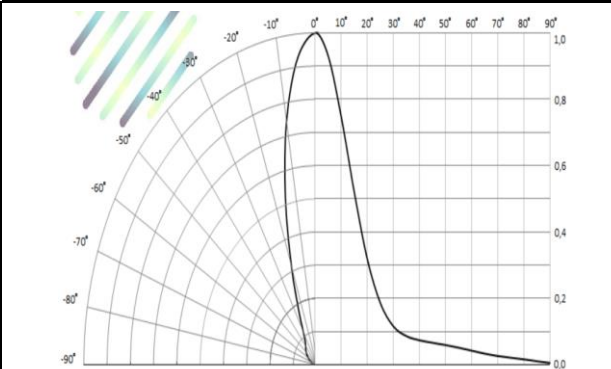


Forward Current Derating Curve

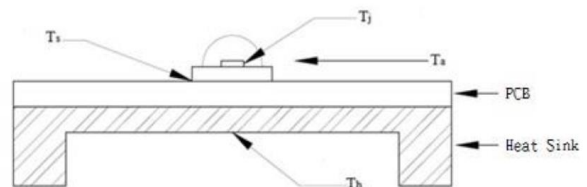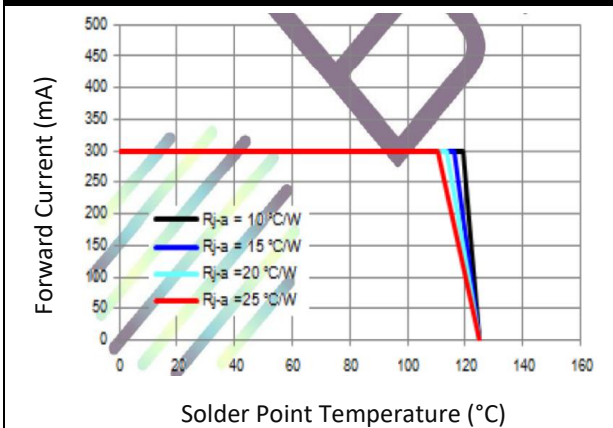

$T_j$ : LED junction Temp.  
 $T_s$ : Solder Point Temp.  
 $T_h$ : Heat Sink Temp.  
 $T_a$ : Ambient Temp.  
 $R_{j-a}$ : Thermal Resistance from  $T_j$  to  $T_a$

## RECOMMENDED SOLDERING PROFILE:

IR Reflow Lead-free Solder:

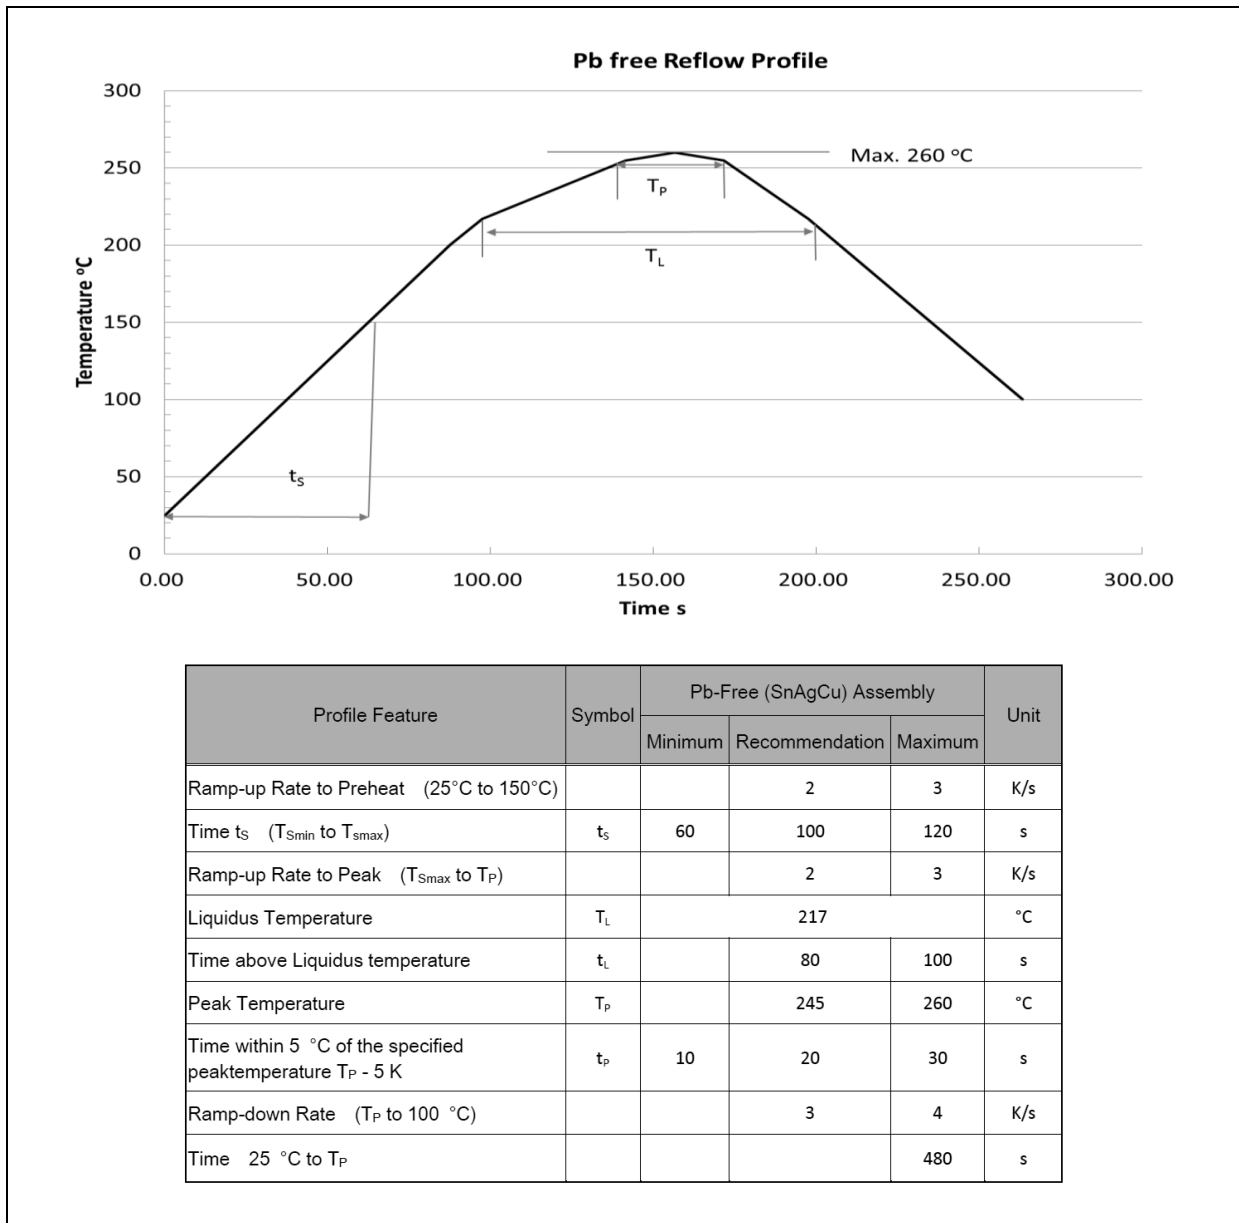

Note:

1. Maximum reflow soldering: 3 times.
2. The recommended soldering temperature is 245°C. Maximum soldering temperature should be limited to 260°C.
3. Before, during, and after soldering, should not apply stress on the components and PCB board.



## PRECAUTIONS OF USE:

---

### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 month at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent and apply baking at 60°C±5°C for 15hrs before use.


### Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±3°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

### Testing Circuit:

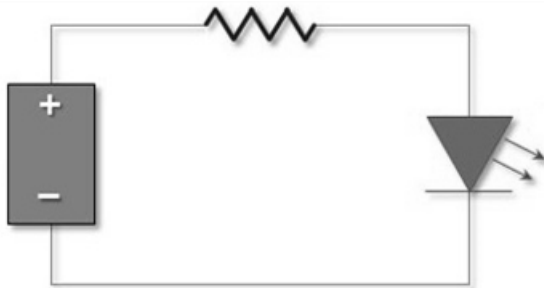

Must apply resistor(s) for protection (over current proof).

### Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.



**REVISION RECORD:**

---

Version	Date	Summary of Revision
A1.0	08/12/2021	Datasheet set-up.