



BRIGHTTEK
BRIGHTTEK (EUROPE) LIMITED

Brighten Up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

PRODUCT DATASHEET

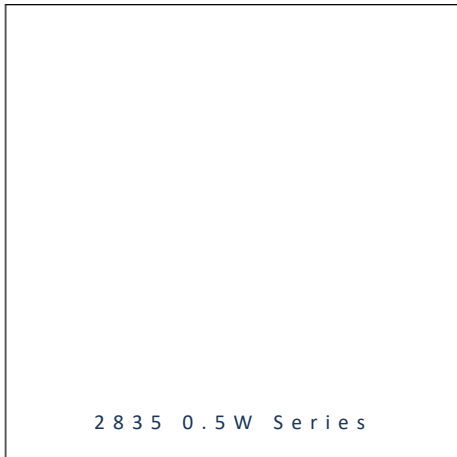


- ▶ PLCC2 SMD
- ▶ 2835 0.5W Series
- ▶ UVA (405nm)

NOQ40S67



Release Date: 02 February 2023 Version: A.1.1



2835 0.5W Series

RoHS
Compliant



FEATURES:

- **Package:** PLCC2 Mid Power White SMT Package
- **Forward Current:** 150mA
- **Forward Voltage (typ.):** 3.1V
- **Radiant Intensity (typ.):** 45mW/sr@150mA
- **Colour:** Ultraviolet UVA
- **Peak Wavelength (typ.):** 405nm
- **Viewing angle:** 120°
- **Materials:**
 - Die: InGaN
 - Resin: Silicon (Water Clear)
 - L/T Finish: Ag plated
- **Operating Temperature:** -40~+85°C
- **Storage Temperature:** -40~+100°C
- **Grouping parameters:**
 - Forward voltage
 - Luminous intensity
 - Peak wavelength
- **Soldering methods:** IR Reflow
- **MSL Level:** acc. to JEDEC Level 3
- **Packing:** 12mm tape with max.2000/reel, ø180mm (7")

APPLICATIONS:

- Curing
- Nail Curing

CHARACTERISTICS:

Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Forward Current	I _F	150	mA
Peak Forward Current (Duty 1/10; width 10KHz)	I _{FP}	300	mA
Reverse Current @5V	I _R	10	μA
Power Dissipation	P _D	540	mW
Electrostatic Discharge	ESD	500	V
Operating Temperature	T _{OPR}	-40~+85	°C
Storage Temperature	T _{STG}	-40~+100	°C


Electrical & Optical Characteristics (Ta=25°C)

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V _F	2.6	---	3.6	V	I _F =150mA
Radiant Intensity	I _e	28	45	---	mW/sr	I _F =150mA
Peak Wavelength	λ _P	---	405	---	nm	I _F =150mA
Spectral Half Width	Δλ	---	20	---	nm	I _F =150mA
Viewing Angle	2θ _{1/2}	---	120	---	deg	I _F =150mA

1. Luminous intensity (I_v) ±15%, Forward Voltage (V_F) ±0.1V, Viewing angle(2θ_{1/2}) ±5%, Wavelength (λ_D) ±1nm


OUTLINE DIMENSION:

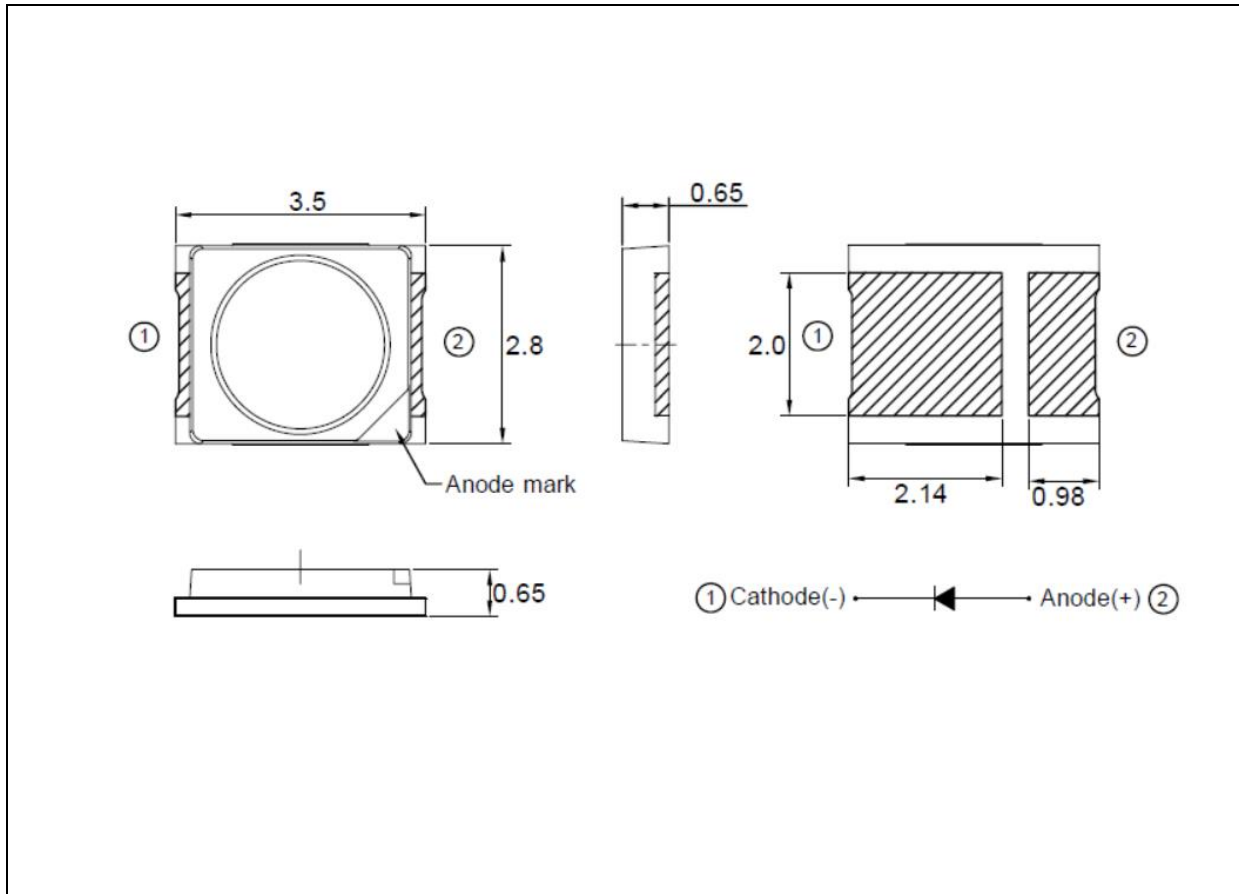Package Dimension:



1. All dimensions are in millimetre (mm).
2. Tolerance $\pm 0.2\text{mm}$, unless otherwise noted.

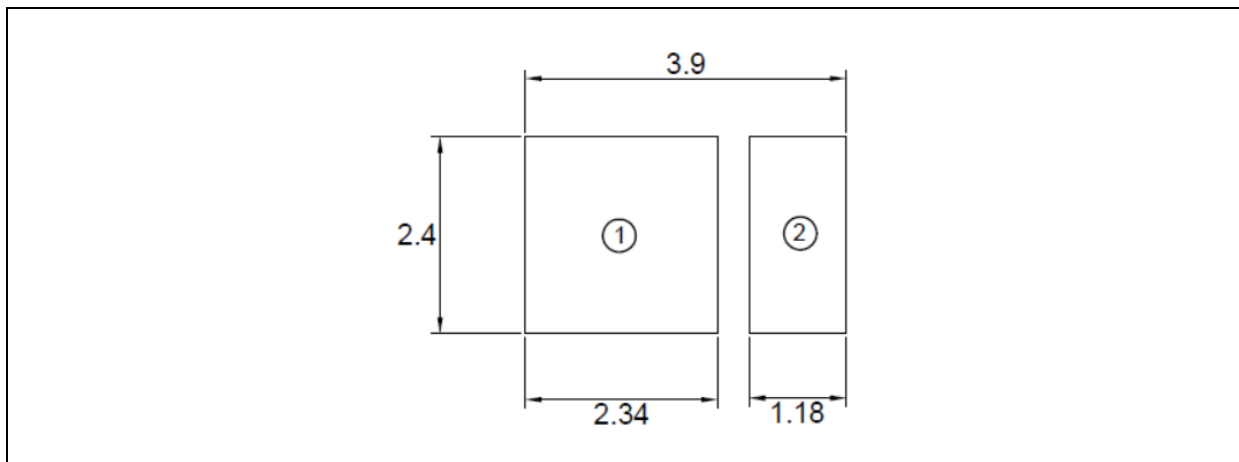Recommended Soldering Pad Dimension:



1. Dimensions are in millimetre (mm).
2. Tolerance $\pm 0.1\text{mm}$ with angle tolerance $\pm 0.5^\circ$.






BINNING GROUPS:

 Forward Voltage Classifications ($I_F = 150\text{mA}$):

Code	Min.	Max.	Unit
1	2.6	2.8	V
2	2.8	3.0	
3	3.0	3.2	
4	3.2	3.4	
5	3.4	3.6	


 Radiant Intensity Classifications ($I_F = 150\text{mA}$):

Code	Min.	Max.	Unit
X	28	37	mW/sr
Y	37	50	
Z	50	65	
AA	65	85	

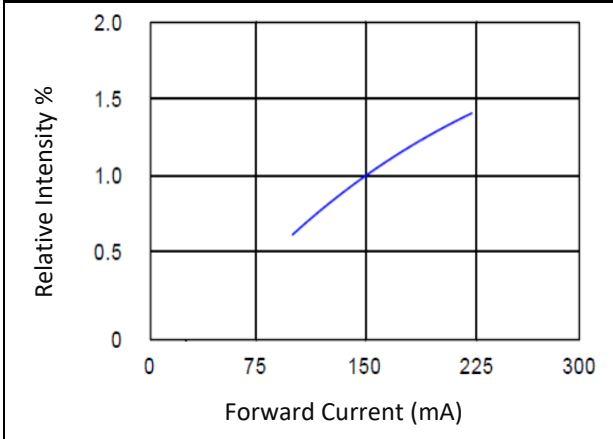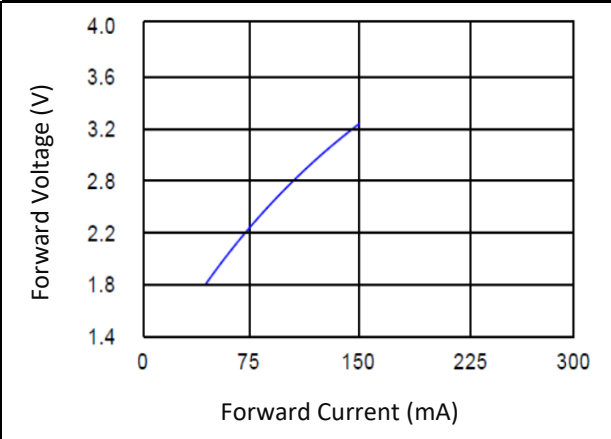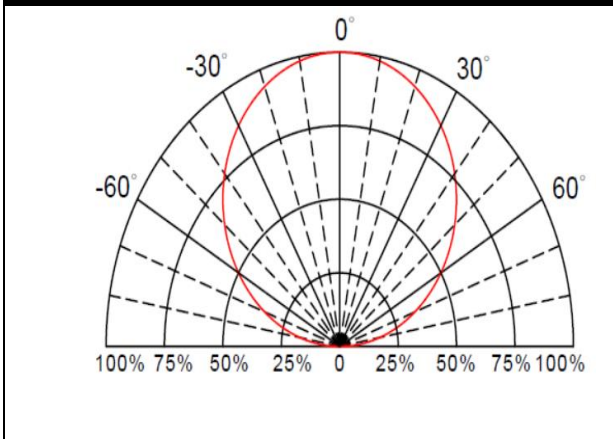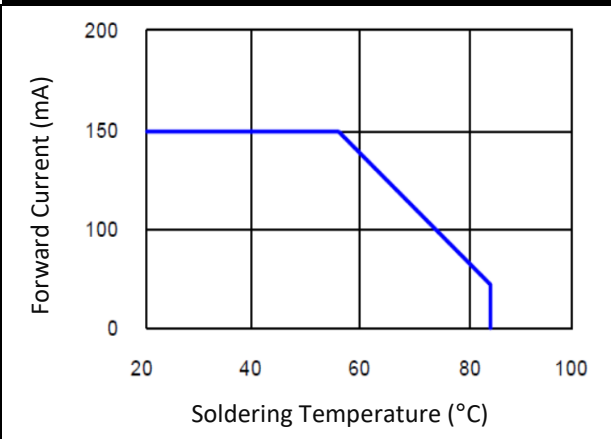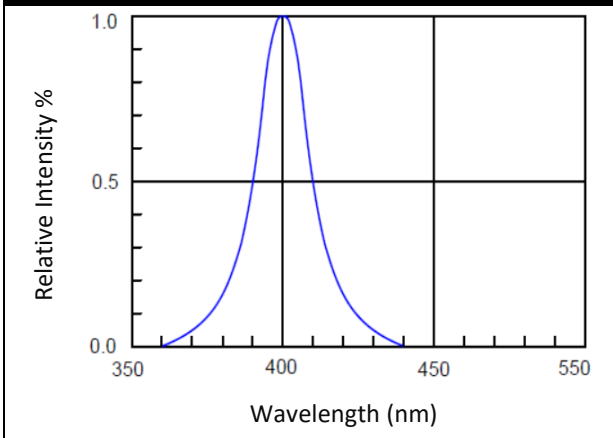ELECTRO-OPTICAL CHARACTERISTICS:
Relative Intensity v.s. Forward Current

Forward Voltage v.s. Forward Current

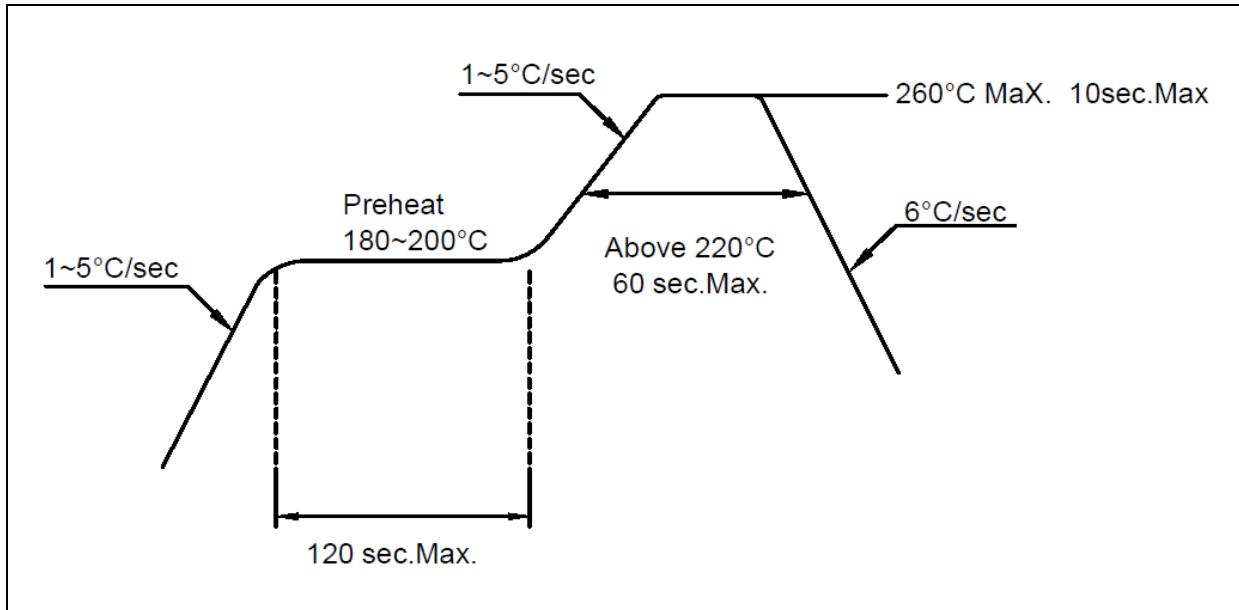Directive Radiation

Forward Current v.s. Soldering Temperature

Relative Intensity v.s. Wavelength


RECOMMENDED SOLDERING PROFILE:

IR Reflow Lead-free Solder:

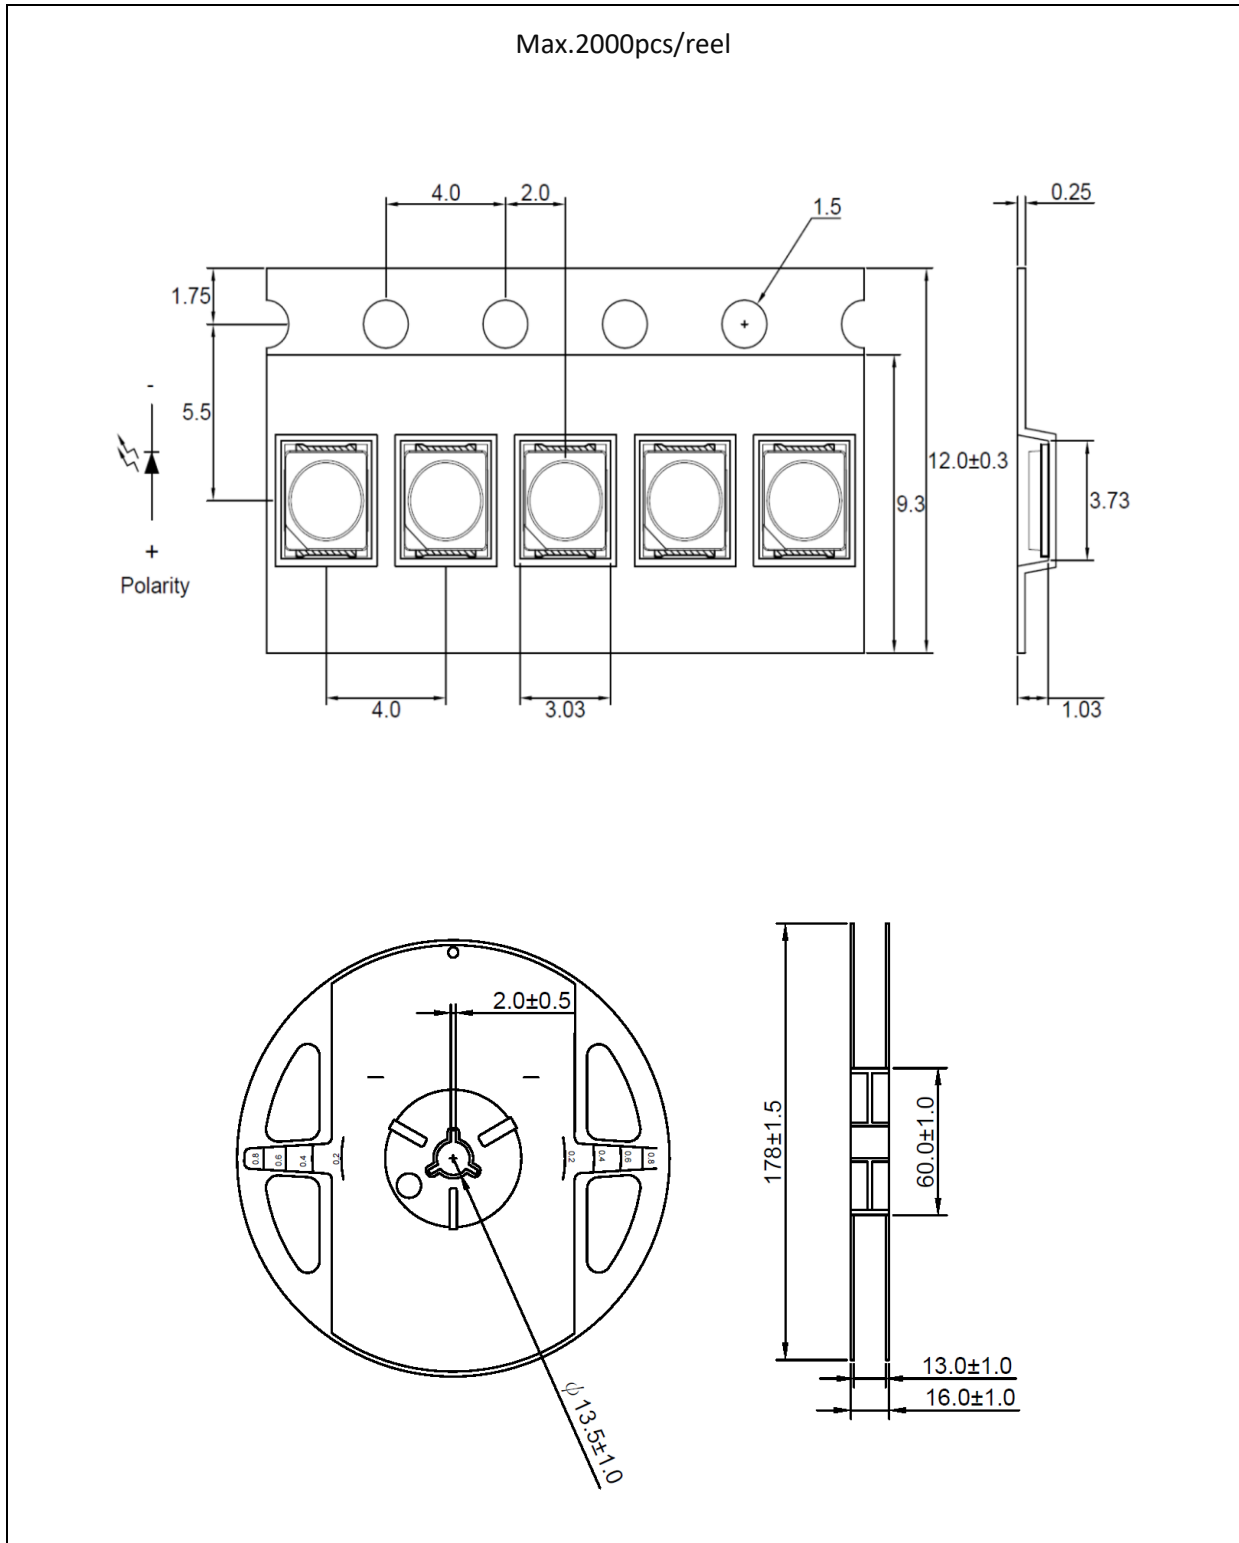


Note:

1. Maximum reflow soldering: 2 times.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.
3. Recommended reflow temperature 240°C. The maximum soldering temperature should be limited to 260°C.

PACKING SPECIFICATION:

Reel Dimension:



PRECAUTIONS OF USE:

Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking before use.

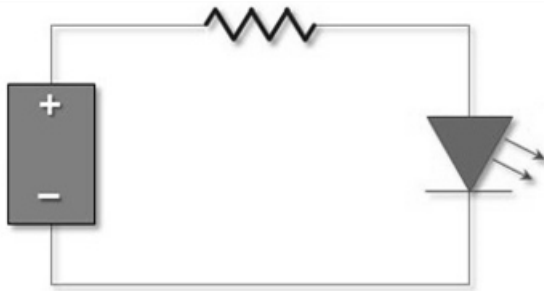
Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±5°C x 72hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

Testing Circuit:



Must apply resistor(s) for protection (over current proof).

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

REVISION RECORD:

Version	Date	Summary of Revision
A1.0	01/03/2017	Datasheet set-up.
A1.1	02/02/2023	New datasheet format.