

# N0W13S82

◆Outline(L\*W\*H) : 5.0\*5.0\*1.6mm

◆Good thermal dissipation & optical uniformity



## Table of Contents

Product Code Method	2
Maximum Rating	2
Typical Product Characteristics	3
Range of Bins	4
Color Coordinate Comparison	5
Electronic-optical Characteristics	6
Dimensions	7
Reflow Profile	8
Test Circuit and Handling Precautions	9
Packing	10
Precautions	11
Test Items and Results of Reliability	12

## Features

- Forward current:  $\leq 30\text{mA} \times 3$
- Typical viewing angle 50% Iv:  $120^\circ$
- RoHS and REACH-compliant
- Qualified according to JEDEC moisture vit  
Level 5
- Lens color: yellowish
- ESD level  $\geq 1\text{kV(HBM)}$

## Applications

- Indoor lighting applications
- Flat backlight for LCD. Switch and symbol
- Indicator and backlighting for all consumer electronics
- Others applications

**■ Product Code Method**

①	②	③	④	⑤
Process Type	Category	LED Type	Lead Frame Size	Dice wavelength & luminous rank
1: normal process	T: SMD LED	C: PLCC top view D: PLCC side view	50: 5.0*5.0mm 03: 3pcs chip	Wxxx: white

⑥	⑦	⑧	⑨
Lap Polarity	Cap Color	PCB Module Code	Flow Code
2: parallel connection	W: yellowish	F: article mode	07: no expression above meaning for company

**■ Maximum Rating(Ta=25°C)**

Characteristics	Symbol	Typical	Unit
DC Forward Current	$I_F$	30*3	mA
Pulse Forward Current <sup>*3</sup>	$I_{PF}$	100*3	mA
Reverse Voltage	$V_R$	5	V
Junction Temperature	$T_J$	110	°C
Operating Temperature Range	$T_{OP}$	-40-80	°C
Storage Temperature Range	$T_{STG}$	-40-100	°C
Soldering Temperature <sup>*4</sup>	$T_{SD}$	260	°C

Notes 1: There is no maximum or typical voltage parameter

2: For other ambient, limited setting of current will be depended on de-rating curves.

3: Duty 1/10, pulse width 0.1ms

4: The maximum of soldering time is 5 seconds in  $T_{SD}$

**■ Typical Product Characteristics(Ta=25°C)**

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Test condition
Forward Voltage	$V_F$	2.8	3.2	3.6	V	$I_F=20mA*3$
Luminous Intensity	$I_v$	-	6000	-	mcd	$I_F=20mA*3$
Color Coordinate	x	-	0.4859	-	-	$I_F=20mA*3$
	y	-	0.4136	-		
Reverse Current	$I_R$	-	-	10	$\mu A$	$V_R=5V$
Viewing Angle	$\square 2\theta_{1/2}$	-	120	-	deg	$I_F=20mA*3$
Color Rendering Index	CRI	-	70	-	-	$I_F=20mA*3$

Notes: 1. Measurement Errors:

 Forward Voltage:  $\pm 0.1V$ , Luminous Intensity:  $\pm 10\%I_v$ , Color Coordinate:  $\pm 0.006$ , CRI:  $\pm 5$ 

2. Electrical-Optical Characteristics (Ta=25°C)


**■ Range of Bins**
**1) Forward Voltage ( $I_F = 20mA*3$ )**

$V_F(V)$		
Bin Code	Min.	Max.
B	2.8	2.9
C	2.9	3.0
D	3.0	3.1
E	3.1	3.2
F	3.2	3.3
G	3.3	3.4
H	3.4	3.5
I	3.5	3.6

**2) Luminous Intensity ( $I_F = 20mA*3$ )**

$I_v(mcd)$		
Bin Code	Min.	Max.
21	4600	6000
22	6000	7800
23	7800	10100

■ **Color Coordinate Comparison**

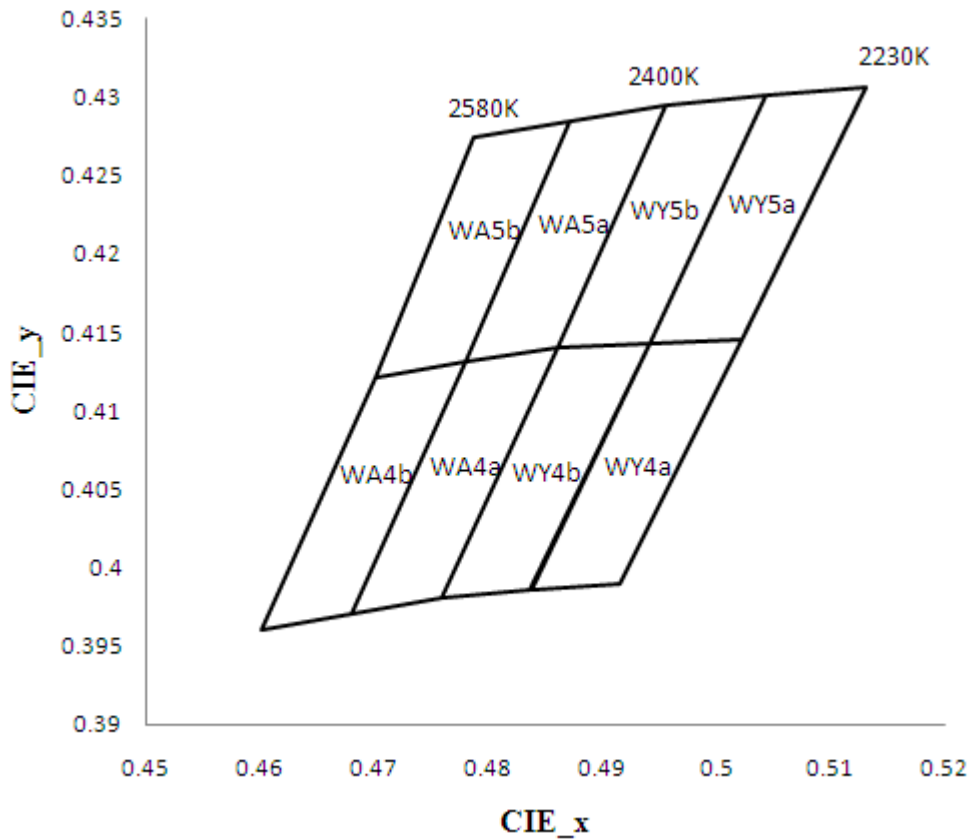


**Color Rank**


BIN	x	y	BIN	x	y	BIN	x	y	BIN	x	y
WY4a	0.4941	0.4143	WY5a	0.5042	0.4301	WY4b	0.4861	0.414	WY5b	0.4954	0.4295
	0.4837	0.3986		0.4941	0.4143		0.4758	0.3981		0.4861	0.414
	0.4915	0.399		0.5021	0.4145		0.48365	0.39855		0.4941	0.41425
	0.5021	0.4145		0.513	0.4306		0.4941	0.41425		0.5042	0.43005
WA4a	0.47805	0.41305	WA5a	0.48705	0.42845	WA4b	0.47	0.4121	WA5b	0.4787	0.4274
	0.46795	0.39705		0.47805	0.41305		0.4601	0.396		0.47	0.4121
	0.4758	0.3981		0.4861	0.414		0.46795	0.39705		0.47805	0.41305
	0.4861	0.414		0.4954	0.4295		0.47805	0.41305		0.48705	0.42845

■ Optical Characteristics


1) Relative Spectral Distribution

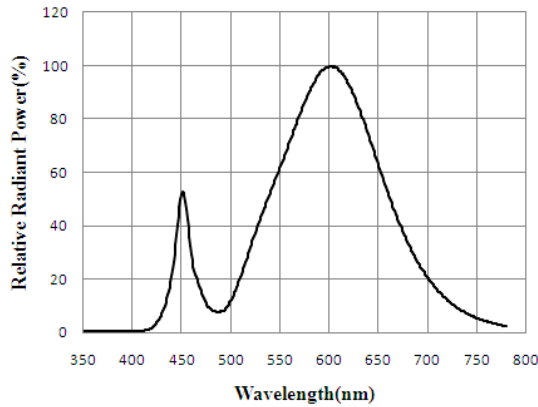


2). Typical Spatial Distribution

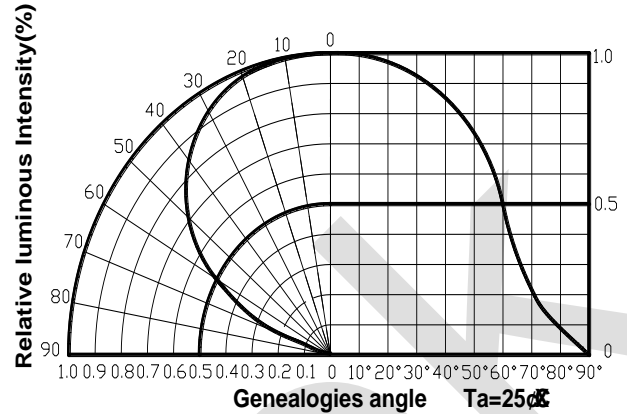


3). Relative Luminous Flux .Current

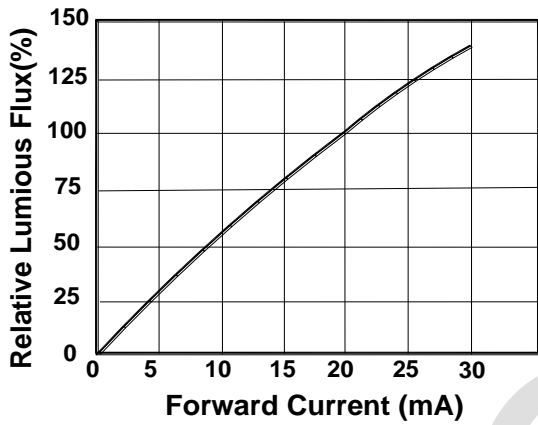


4). Relative Luminous Flux .Ambient Temperature

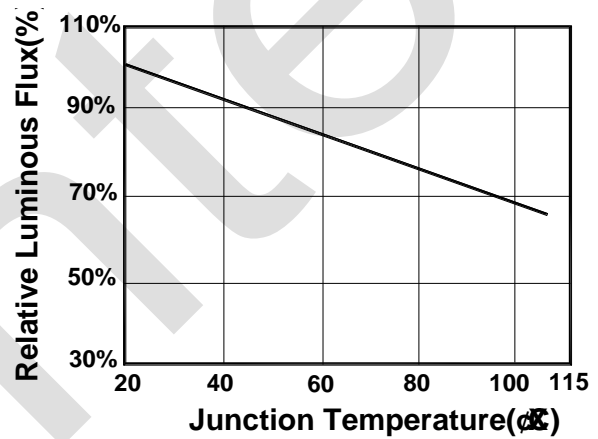


5). Electrical Characteristics

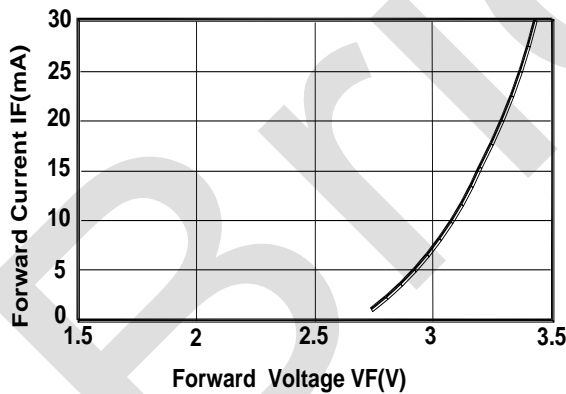


6). Relative Forward Voltage Temperature

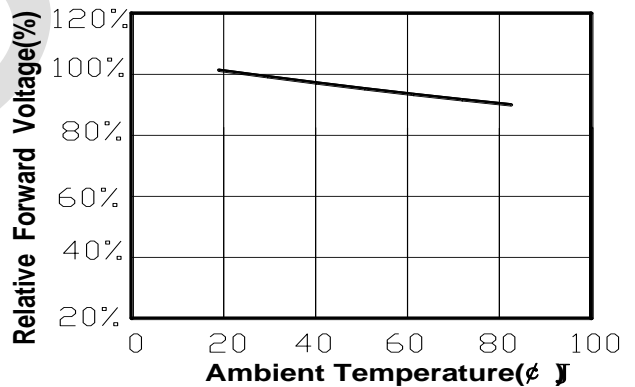


7). Relative Emission Efficiency. Current

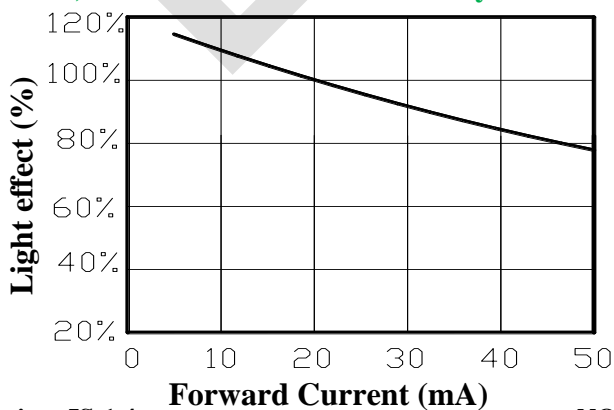


8). Thermal Design

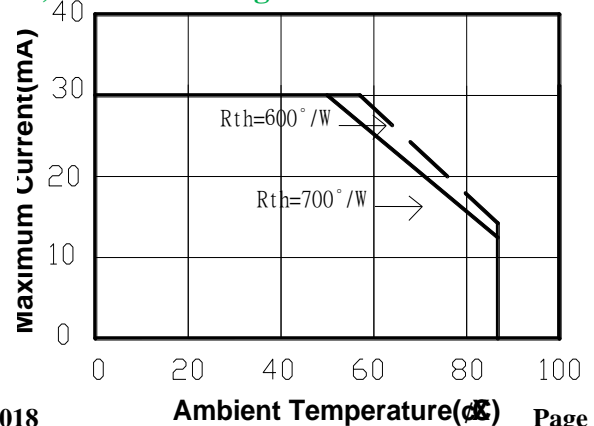

■ Dimensions

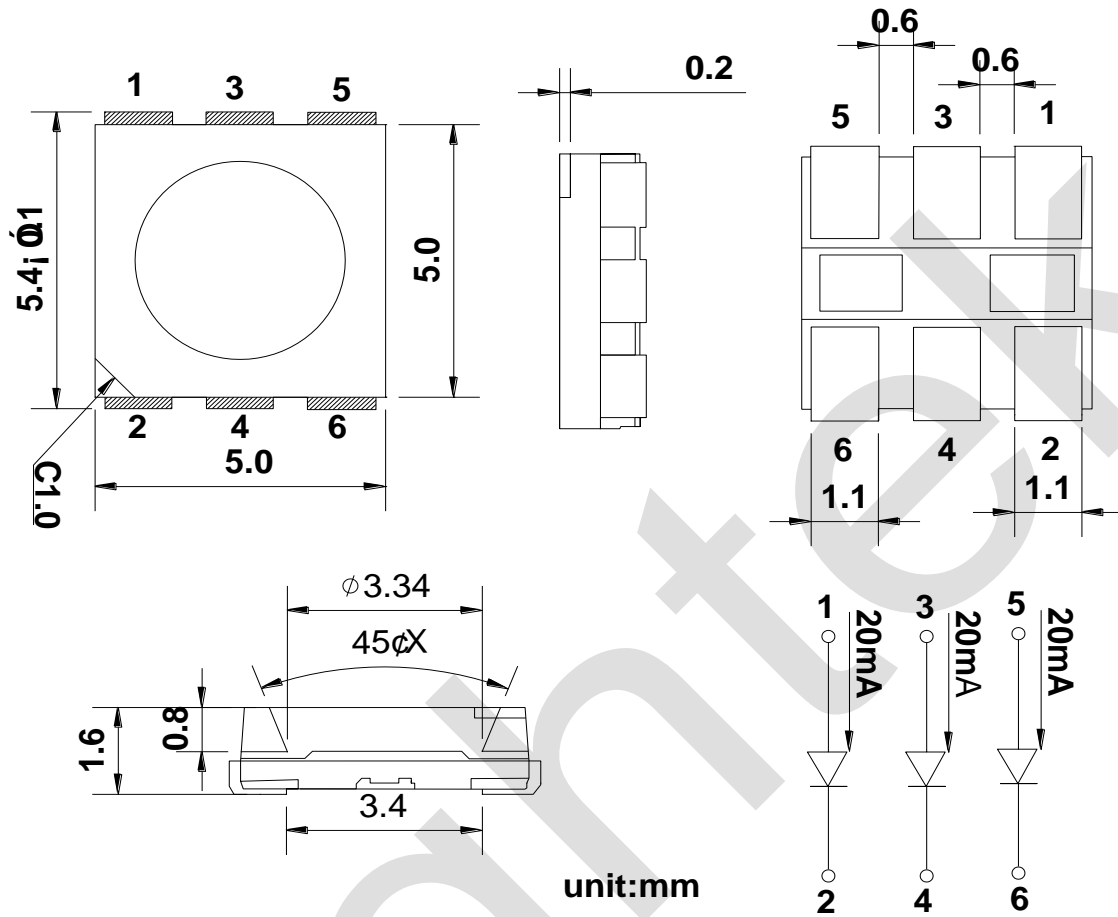


RECOMMEND PADLAYOUT

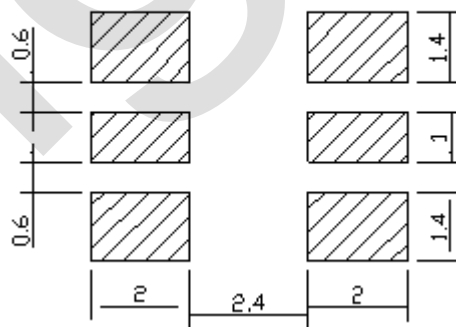


- Notes: 1. All dimensions are in millimeters  
 2. Tolerance is  $\pm 0.1$  mm unless otherwise noted  
 3. Specifications are subject to change without notice.

■ **Reflow Profile**

**1. IR reflow soldering profile for lead free solder**

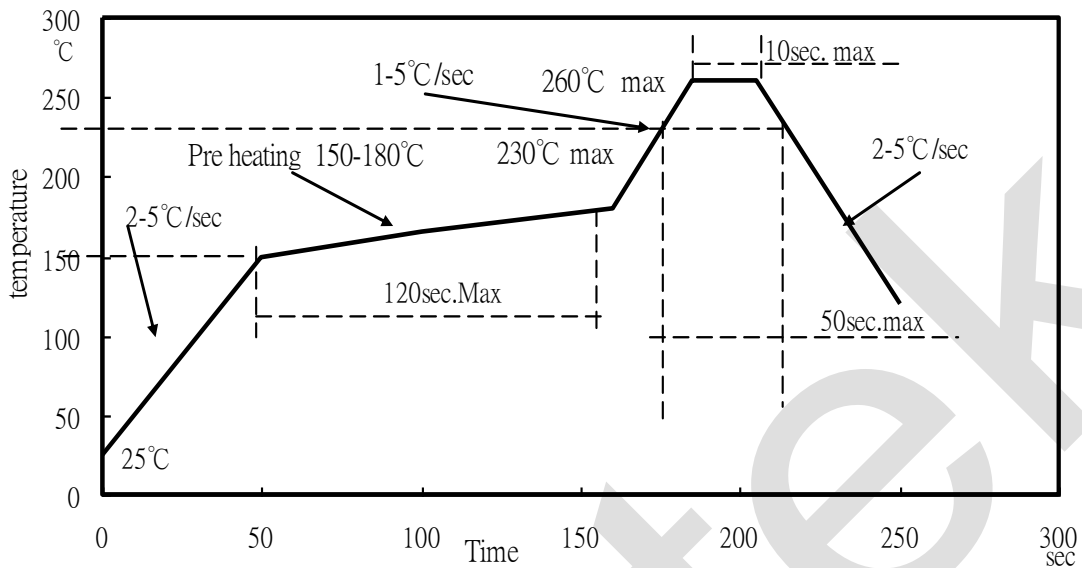

**2. IR reflow soldering profile for lead solder**

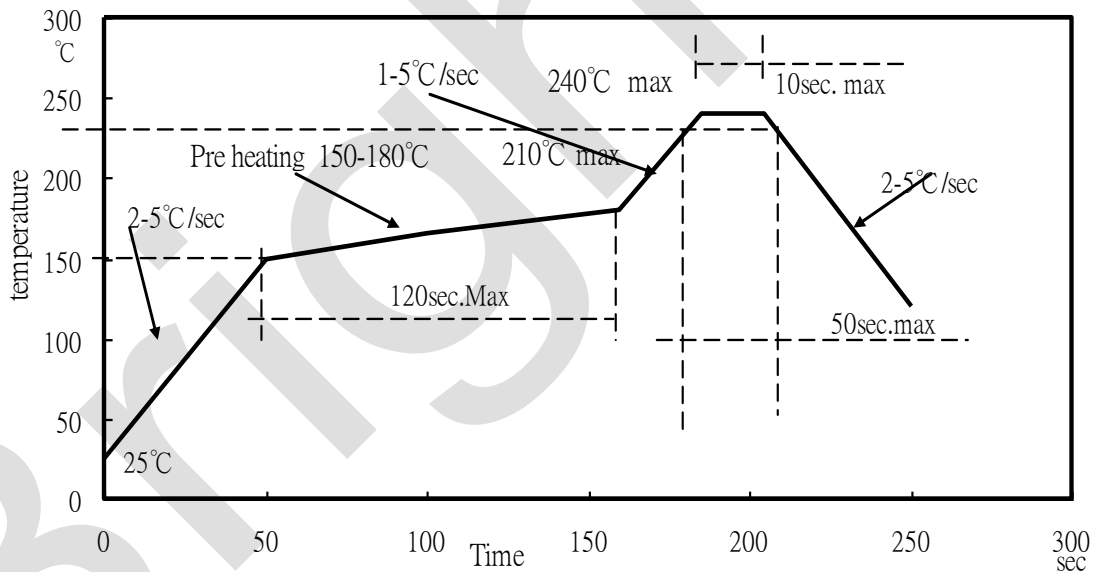


**Notes:**

1. We recommend the reflow temperature 240°C(±5°C).the maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the silicone resin while it is exposed to high temperature.
3. Number of reflow process shall be less than 3 times.

## ■ Test Circuit and Handling Precautions

---

### 1. Test Circuit

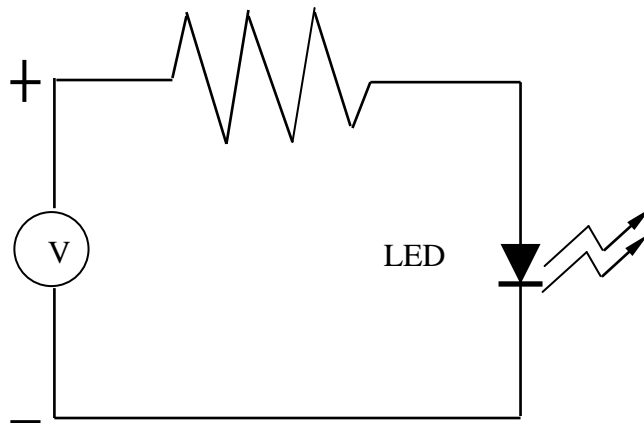

### 2. Handling Precautions

#### 2.1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

#### 2.2. Storage

1). It is recommended to store the products in the following conditions:

Humidity: 60% R.H. Max.

Temperature: 5°C~30°C (41°F~86°F)

2). Shelf life in sealed bag: 12 month at <math>5^{\circ}\text{C}\sim 30^{\circ}\text{C}</math> and <math>< 60\% \text{ R.H.}</math> after the package is Opened, the products should be used within a week or they should be keeping to stored at  $\leq 20\% \text{ R.H.}$  with zip-lock sealed.

#### 2.3. Baking

It is recommended to baking before soldering when the pack is unsealed after 24hrs.

The Conditions are as followings:

1).  $60\pm 3^{\circ}\text{C}$  X 6hrs and <math>< 5\% \text{ RH}</math>, for reel


2).  $125\pm 3^{\circ}\text{C}$  X 2hrs, for single LED

It shall be normal to see slight color fading of carrier (light yellow) after baking in process





■ Packing



● Feeding Direction (Unit: mm)

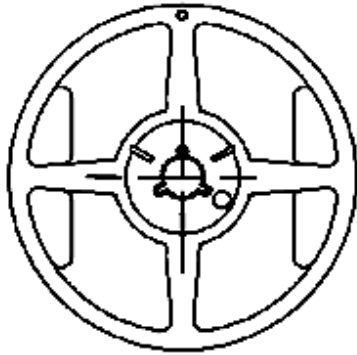


● Dimensions of Reel (Unit: mm)

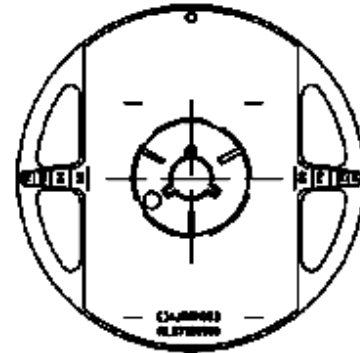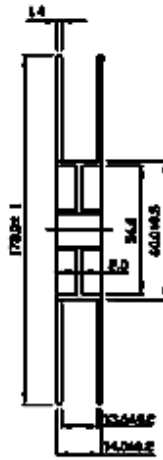

● Dimensions of Tape (Unit: mm)

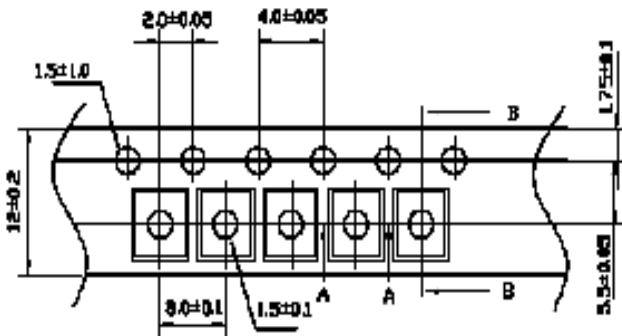

● Arrangement of Tape

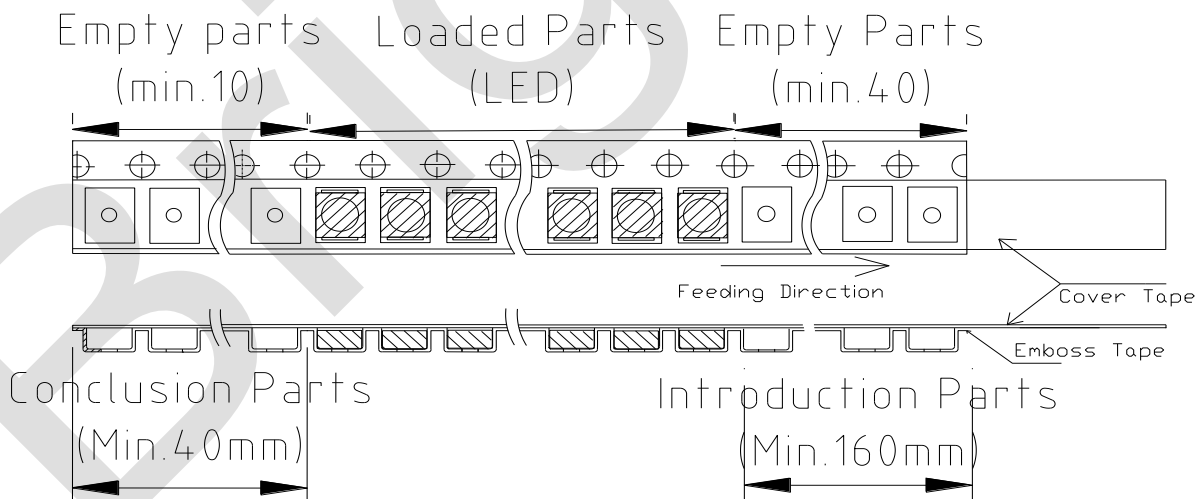


Notes:

1. Empty component pockets are sealed with top cover tape;
2. The max loss number of SMD is 2pcs;
3. The cathode is oriented towards the tape sprocket hole in accordance with ANSI/EIA RS-481 specifications;
4. 1,000pcs per reel

■ Packing

● Packaging Specifications

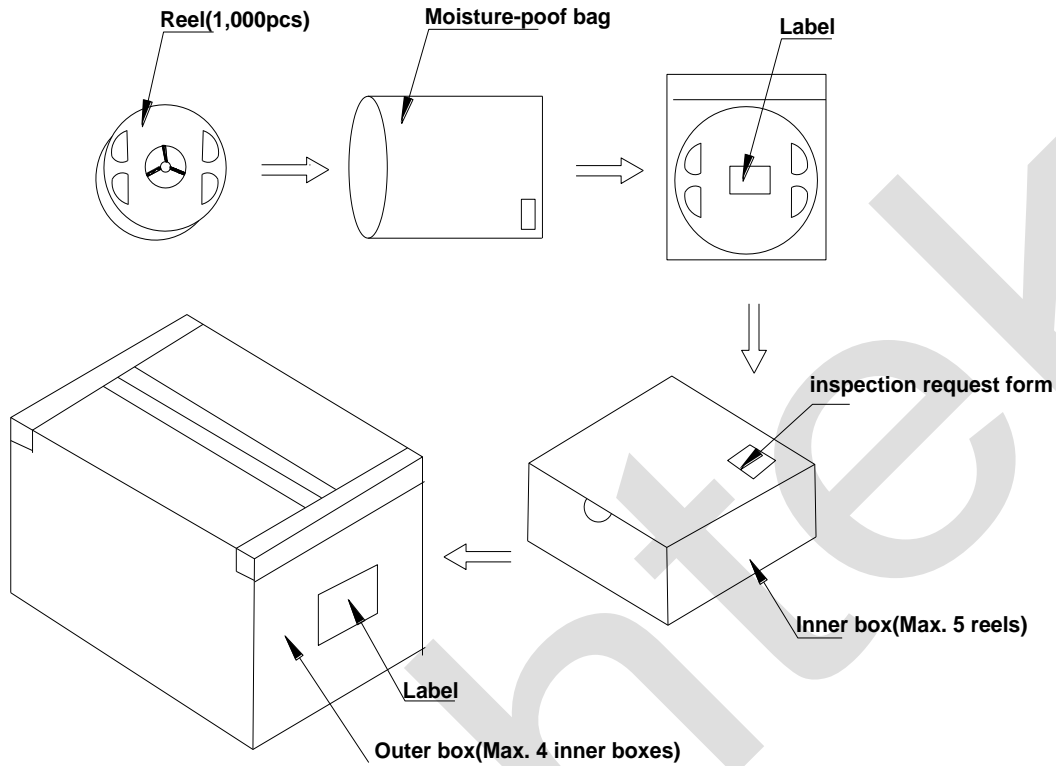

Notes:

Reeled product (max.1,000) is packed in a sealed moisture-proof bag. Five bags are packed in an inner box (size: about 260 X 230 X 100 mm) and four inner boxes are in an outer box (size: about 480 X 275 X 215 mm). On the label of moisture-proof bag, there should be the information of Part No., Lot No. and quantity number; also the total quantity number should be on inspection request form on outer box.

## ■ Precautions

---


### 1. Abnormal situation caused by improper setting of collet

To choose the right collet is the key issue in improving the product's quality. LED is different from other electronic components, which is not only about electrical output but also for optical output. This characteristic made LED more fragile in the process of SMT. If the collet's lowering down height is not well set, it will bring damage to the gold wire at the time of collet's picking up and loading which will cause the LED fail to light up, light up now and then or other quality problems


### 2. How to choose the collet

During SMT, please choose the collet that has larger outer diameter than the lighting area of lens, in case that improper position of collet will damage the gold wire inside the LED. Different collets fit for different products, please refer to the following pictures cross out

**Outer diameter of collet should be larger than the lighting area**



Picture 1(√)



Picture 2(X)

### 3. Other points for attention

- A. No pressure should be exerted to the epoxy shell of the SMD under high temperature.
- B. Do not scratch or wipe the lens since the lens and gold wire inside are rather fragile and cross out easy to break.
- C. LED should be used as soon as possible when being taken out of the original package, and should be stored in anti-moisture and anti-ESD package.

### 4. This usage and handling instruction is only for your reference.

**■ Test Items and Results of Reliability**

Test Item	Test Conditions	Duration/ Cycle	Number of Damage	Reference
Temperature Cycle	-40°C 30min ↑↓ 1 min 100°C 30min	100 cycles	0/22	JEITA ED-4701 300 303
High Temperature Storage	T <sub>a</sub> =100°C±5°C	1000 hrs	0/22	EIAJED-4701 200 201
High Humidity Heat Life Test	T <sub>a</sub> =85°C RH=85% I <sub>F</sub> =20mA*3	500 hrs	0/22	Tested with Brighttek standard
Humidity Heat Storage	T <sub>a</sub> =85°C RH=85%	1000 hrs	0/22	EIAJED-4701 100 103
Life Test	T <sub>a</sub> =25°C I <sub>F</sub> =20mA*3	1000 hrs	0/22	Tested with Brighttek standard
Low Temperature Life Test	T <sub>a</sub> =-40°C I <sub>F</sub> =20mA*3	1000 hrs	0/22	Tested with Brighttek standard
High Temperature Life Test	T <sub>a</sub> =85°C I <sub>F</sub> =20mA*3	1000 hrs	0/22	Tested with Brighttek standard

<b>*Criteria for Judging</b>				
Item	Symbol	Condition	Criteria for Judgment of Pass	
			Min	Max
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA*3	-	USL* <sup>1</sup> ×1.1
Reverse Current	I <sub>R</sub>	V <sub>R</sub> = 5V	-	10μA
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> =20mA*3	LSL* <sup>2</sup> ×0.7	-

[Note] USL\*<sup>1</sup>: Upper Specification Level

LSL\*<sup>2</sup>: Lower Specification Level