

# N0W19S35

- ◆ Outline(L\*W\*H) : 3.5\*2.7\*1.0mm
- ◆ High flux efficiency & Energy conservation
- ◆ Good thermal dissipation & Optical uniformity



## Table of Contents

Product Code Method-----	2
Maximum Rating -----	2
Typical Product Characteristics -----	3
Range of Bins -----	3
Color Coordinate Comparison-----	4
Electronic-optical Characteristics-----	5
Dimensions -----	6
Reflow Profile-----	7
Test Circuit and Handling Precautions-----	8
Packing -----	9
Precautions-----	11
Test Items and Results of Reliability-----	12

## Features

- Forward current:  $\leq 30\text{mA}$
- Typical view angle 50% Iv:  $120^\circ$
- RoHS and REACH-compliant
- Lens color: yellowish
- Qualified according to JEDEC moisturevity Level 2a
- ESD level 1KV(HBM)

## Applications

- Indoor signage display applications
- Indoor decorating and entertainment design
- Flat backlight for LCD. Switch and symbol
- Indicator and backlighting for all consumer electronics

■ Product Code Method

①	②	③	④	⑤
Process Type	Category	LED Type	Lead Frame	Dice Wavelength & Luminous Rank
1 : normal product	S: SMD LED	C: PLCC top view D: PLCC side view	3527: 3.5*2.7mm	W5xx: White

⑥	⑦	⑧	⑨
Lap Polarity	Lens Color	Bracket or COB Specifications	Assembly Code
0: non-common anode and non-common cathode	W: yellowish	A: article mode	C: no zener and high CRI P: no expression above meaning for company

■ Maximum Rating(Ta=25°C)

Characteristics	Symbol	Rating	Unit
DC Forward Current	I <sub>F</sub>	30	mA
Pulse Forward Current <sup>*3</sup>	I <sub>PF</sub>	100	mA
Reverse Voltage	V <sub>R</sub>	5	V
Junction Temperature	T <sub>J</sub>	110	°C
Operating Temperature Range	T <sub>OP</sub>	-40-80	°C
Storage Temperature Range	T <sub>STG</sub>	-40-100	°C
Soldering Temperature <sup>*4</sup>	T <sub>SD</sub>	260	°C

Notes 1: There is no maximum or typical voltage parameter

2: For other ambient, limited setting of current will be depended on de-rating curves.

3: Duty 1/10, pulse width 0.1ms

4: The maximum of soldering time is 5 seconds in T<sub>SD</sub>

■ Typical Product Characteristics (Ta=25°C)

Characteristics	Symbol	Min.	Typ.	Max.	Unit	Test condition
Forward Voltage	V <sub>F</sub>	2.8	3.0	3.4	V	I <sub>F</sub> =20mA
Reverse Current	I <sub>R</sub>	-	-	10	μA	V <sub>R</sub> =5V
Luminous Intensity	I <sub>v</sub>	1650	2080	-	mcd	I <sub>F</sub> =20mA
Color Coordinate	x	-	0.404	-	-	I <sub>F</sub> =20mA
	y	-	0.387	-	-	
View Angle	2θ <sub>1/2</sub>	-	120	-	Deg	I <sub>F</sub> =20mA
Color Rendering Index	CRI	90	-	-	-	I <sub>F</sub> =20mA
Color Temperature	CCT	3400	-	3640	K	I <sub>F</sub> =20mA

Notes: 1. Measurement Errors:

Forward Voltage: ±0.1V, Luminous Intensity: ±10%I<sub>v</sub>, Color Coordinate: ±0.006, View Angle (2θ<sub>1/2</sub>): ±5%

CRI±5. Color Temperature: ±10% CCT

2. Electrical-Optical Characteristics (Ta=25°C)

■ Range of Bins

1). Forward Voltage Bins(I<sub>F</sub>=20mA)


Bin code	Min. V <sub>F</sub> (V)	Max. V <sub>F</sub> (V)
B	2.8	2.9
C	2.9	3.0
D	3.0	3.1
E	3.1	3.2
F	3.2	3.3
G	3.3	3.4

2). Luminous Intensity Bins(I<sub>F</sub>=20mA)

Bin code	Min. I <sub>v</sub> (mcd)	Max. I <sub>v</sub> (mcd)
4	1650	1850
5	1850	2050
6	2050	2250
7	2250	2450
8	2450	2650



■ Color Coordinate Comparison

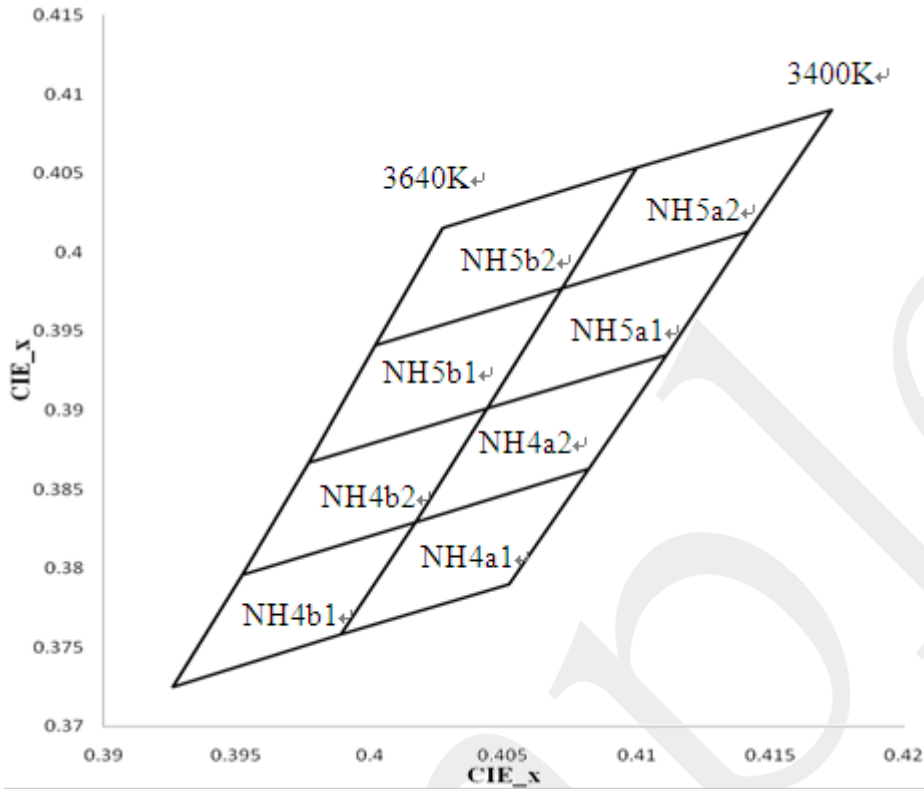


Color Rank

BIN	x	y	BIN	x	y	BIN	x	y
NH4a1	0.4017	0.3829	NH4a2	0.4044	0.3901	NH4b1	0.3952	0.3796
	0.3989	0.37585		0.4017	0.3829		0.3926	0.3725
	0.4052	0.379		0.4082	0.3863		0.3989	0.37585
	0.4082	0.3863		0.4111	0.3935		0.4017	0.3829
NH4b2	0.3977	0.3867	NH5a1	0.4072	0.3977	NH5a2	0.41	0.40535
	0.3952	0.3796		0.4044	0.3901		0.4072	0.3977
	0.4017	0.3829		0.4111	0.3935		0.4142	0.4013
	0.4044	0.3901		0.4142	0.4013		0.4173	0.409
NH5b1	0.4002	0.3941	NH5b2	0.4027	0.4015			
	0.3977	0.3867		0.4002	0.3941			
	0.4044	0.3901		0.4072	0.3977			
	0.4072	0.3977		0.41	0.40535			




■ Electrical-Optical Characteristics


1). Relative Spectral Distribution

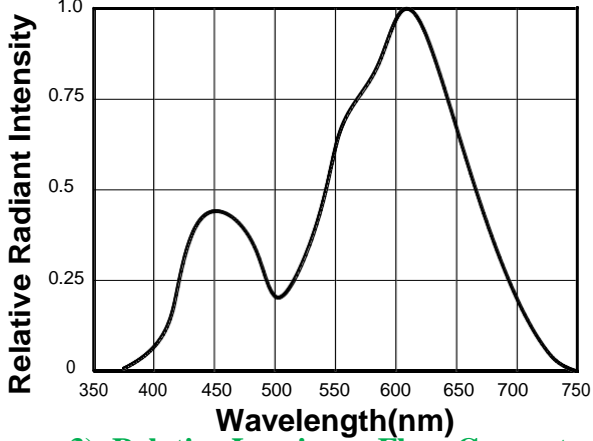


2). Typical Spatial Distribution

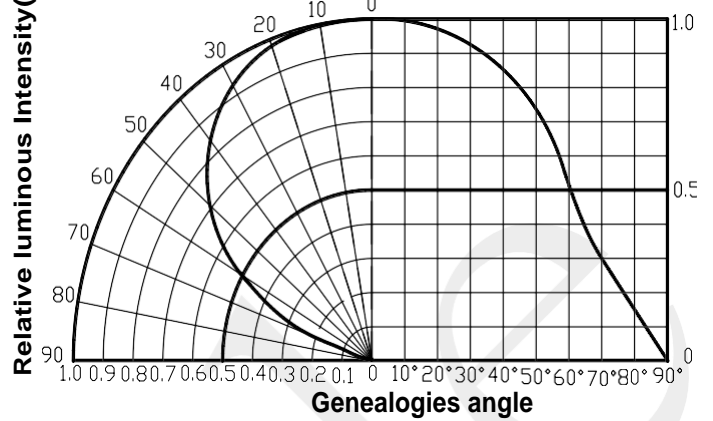


3). Relative Luminous Flux .Current

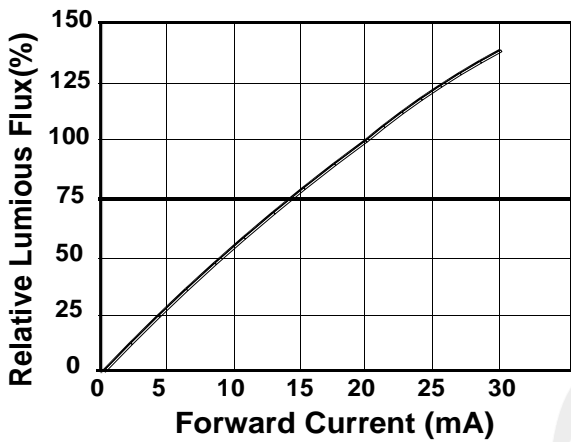


4). Relative Luminous Flux .Ambient Temperature

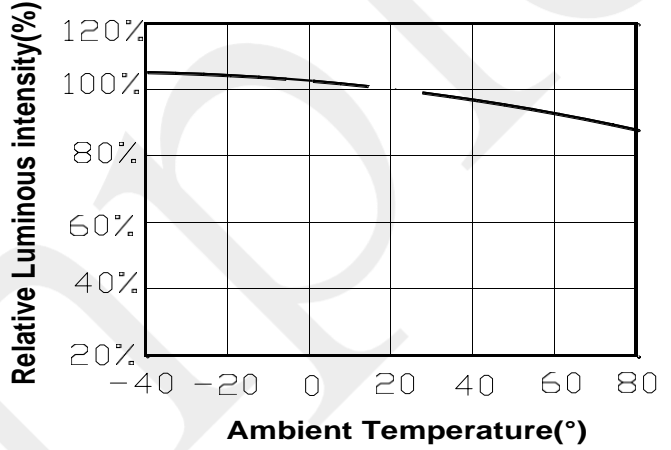


5). Electrical Characteristics

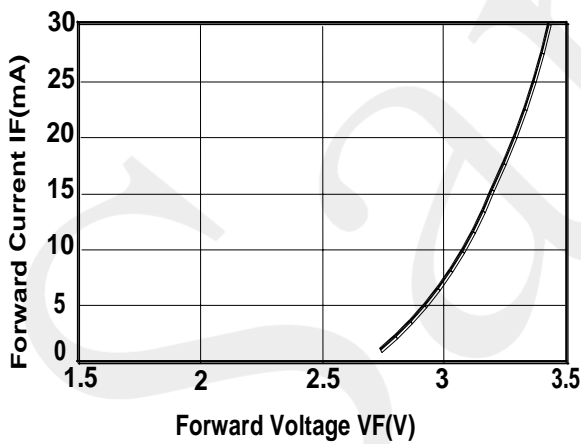


6). Thermal Design

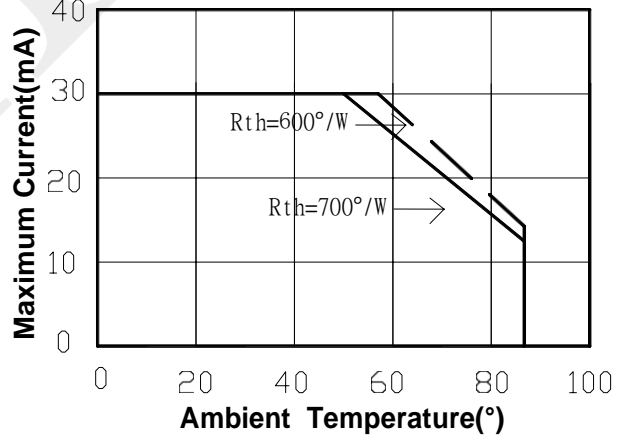


7). Forward Voltage Temperature

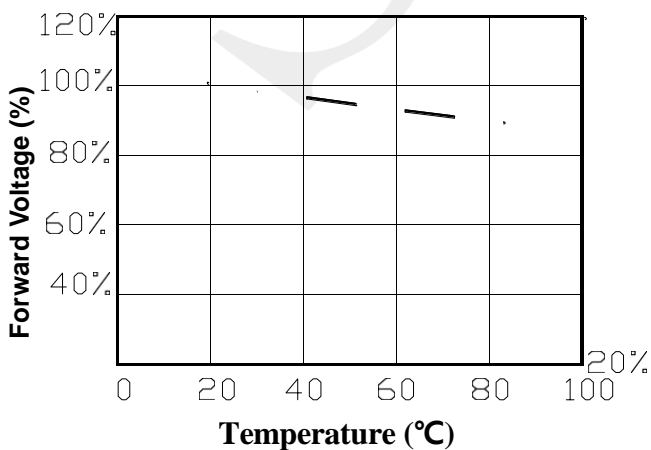


8). Light effect VS Current

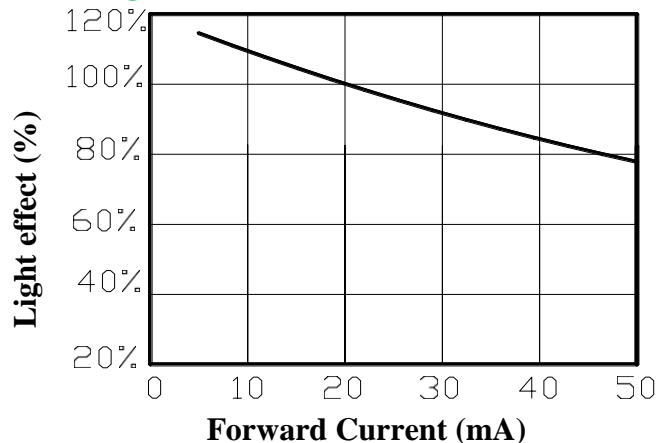

■ Dimensions

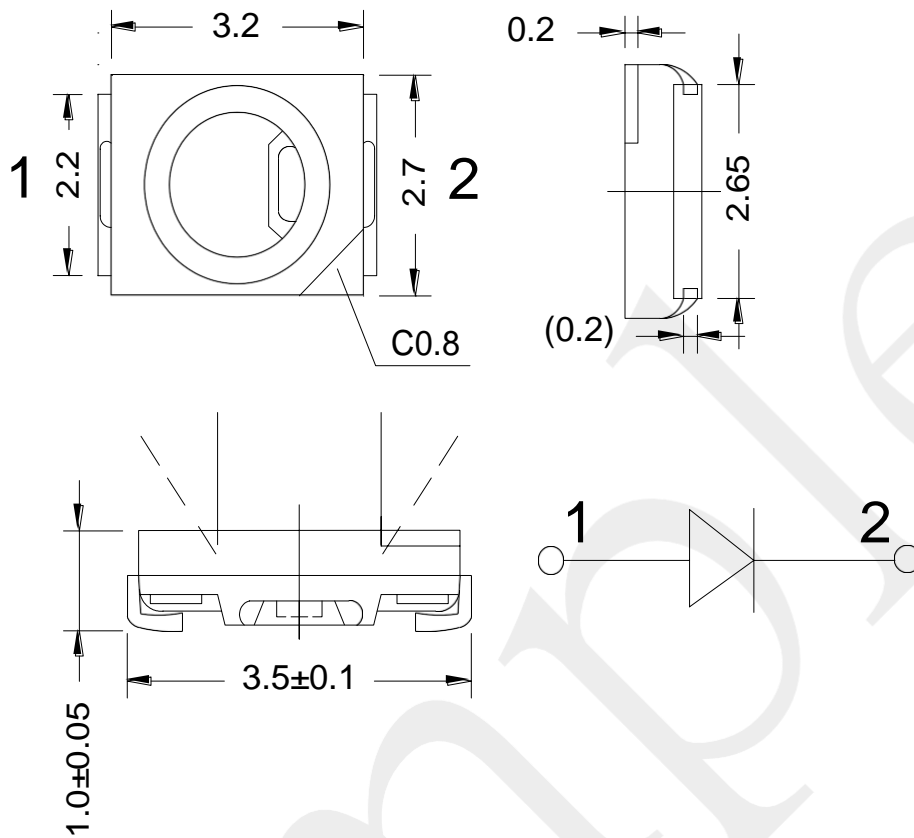


**Recommend Padlayout**

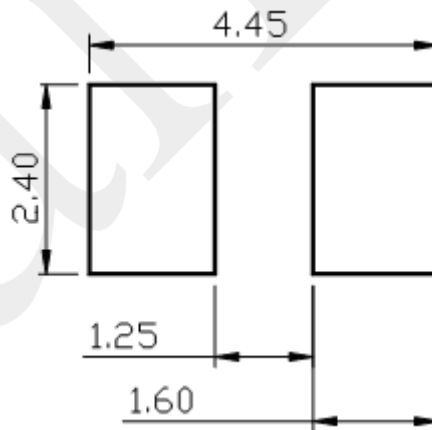


- Notes: 1. All dimensions are in millimeters (inches)  
 2. Tolerance is  $\pm 0.1$  ( $\pm 0.004$ "")mm unless otherwise noted  
 3. Specifications are subject to change without notice.

■ Reflow Profile

1. IR reflow soldering Profile for Lead Free solder

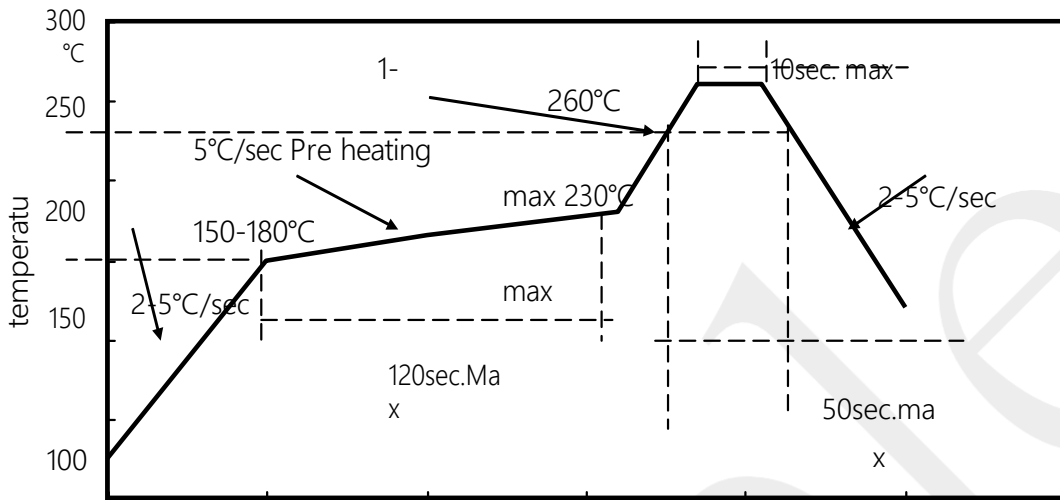

2. IR reflow soldering Profile for Lead solder

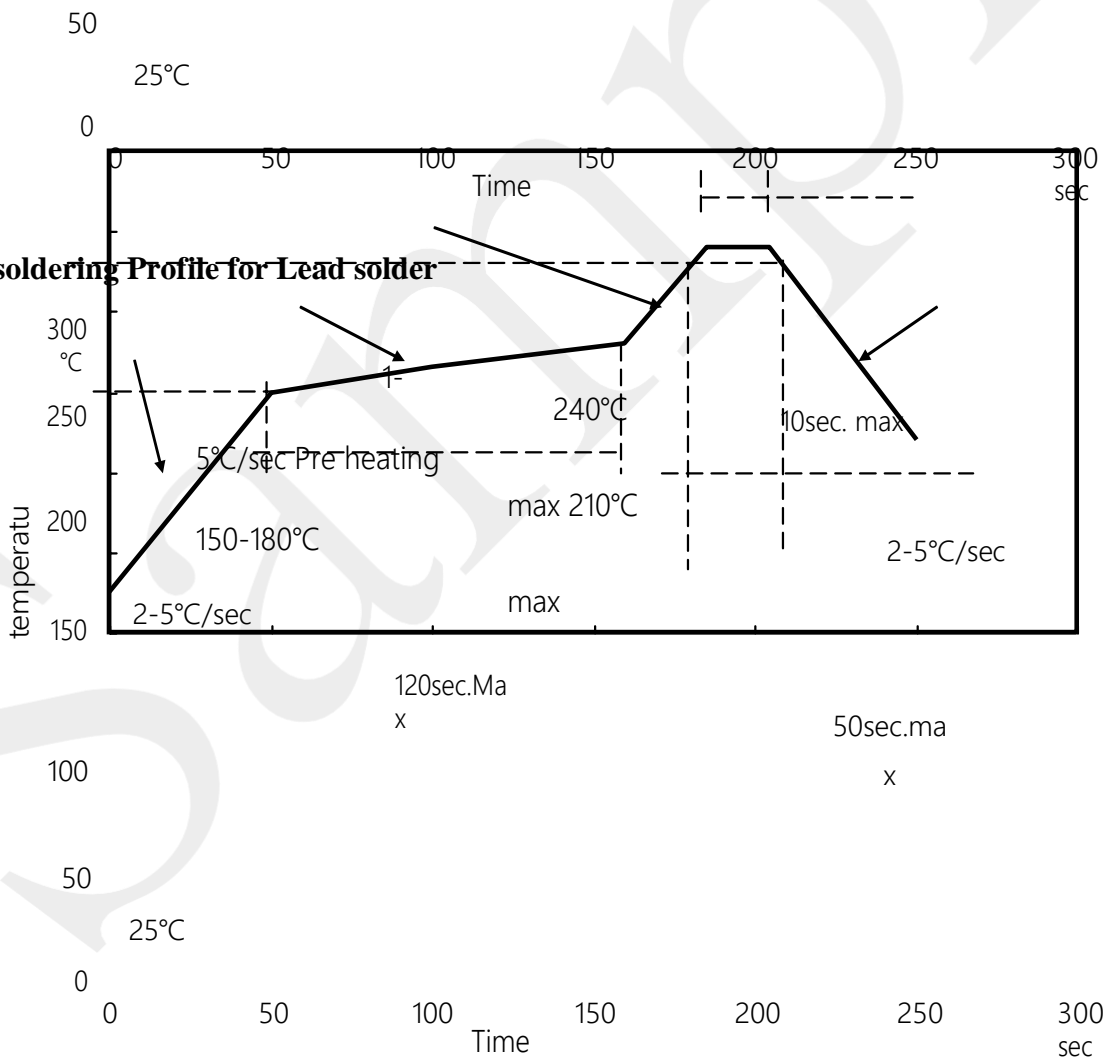


Notes:

1. We recommend the reflow temperature 240°C(±5°C).the maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the silicone resin while it is exposed to high temperature.
3. Number of reflow process shall be less than 3 times.

## ■ Test Circuit and Handling Precautions

---

### 1. Test circuit

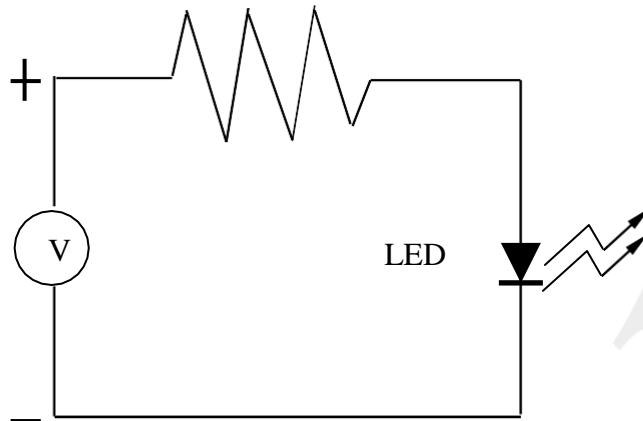

### 2. Handling precautions

#### 2.1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

#### 2.2. Storage

1). It is recommended to store the products in the following conditions:

Humidity: 60% R.H. Max.

Temperature : 5°C~30°C(41°F~86°F)

2). Shelf life in sealed bag: 12 month at < 5°C~30°C and < 60% R.H. after the package is Opened, the products should be used within a week or they should be keeping to stored at  $\leq 20\%$  R.H. with zip-lock sealed.

#### 2.3. Baking

It is recommended to baking before soldering when the pack is unsealed after 24hrs.

The Conditions are as followings:

1). . 60±3°C X 6hrs and < 5%RH, for reel


2). . 125±3°C X 2hrs, for single LED

It shall be normal to see slight color fading of carrier (light yellow) after baking in process




■ Packing


● Feeding Direction (Unit: mm)

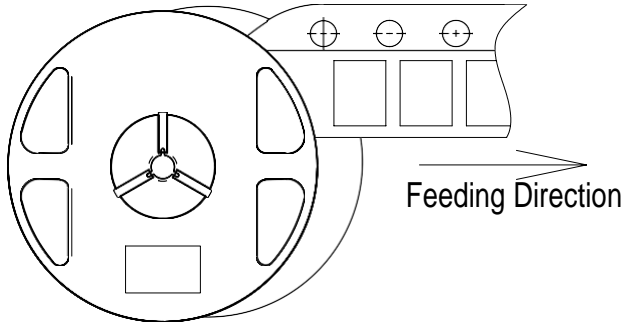


● Dimensions of Reel (Unit: mm)

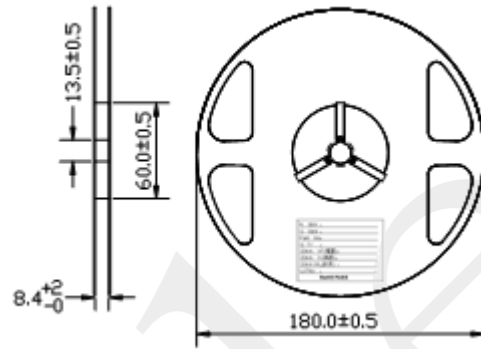

● Dimensions of Tape (Unit: mm)

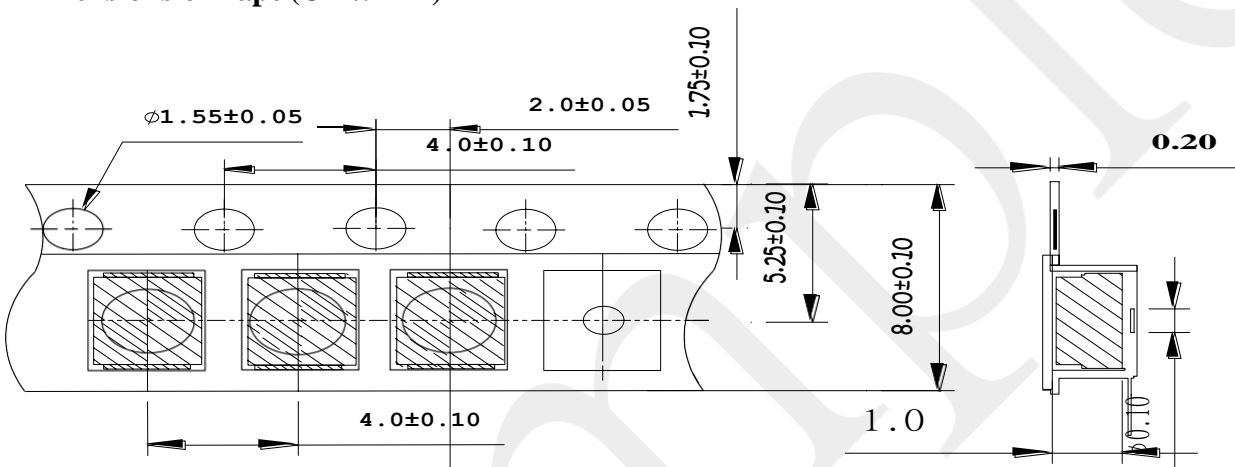

● Arrangement of Tape

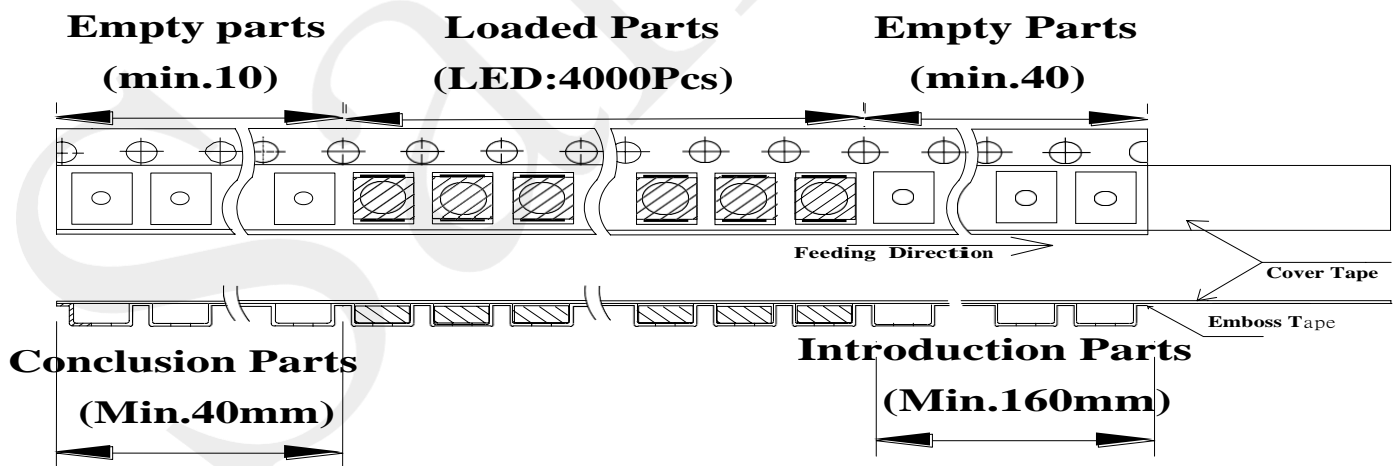


Notes:

1. Empty component pockets are sealed with top cover tape
2. The max loss number of SMD is 2pcs;
3. The cathode is oriented towards the tape sprocket hole in accordance with ANSI/EIA RS-481 specifications;
4. 4,000pcs per reel;

■ Packing

---

● Packaging Specifications

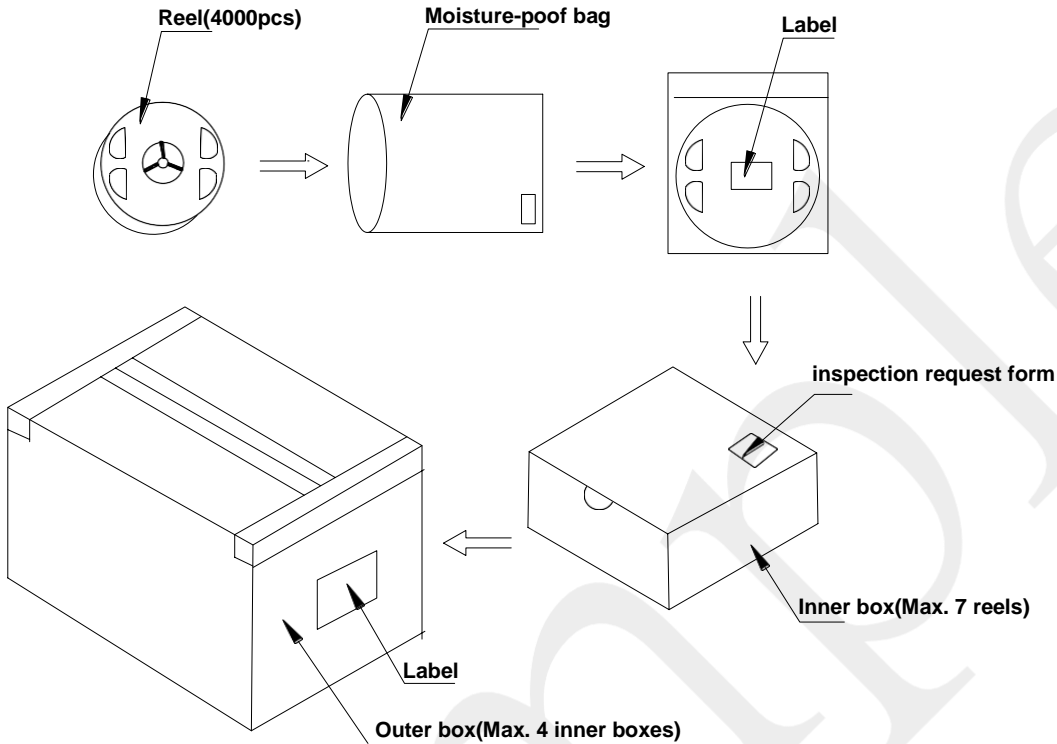

**Notes:**

Reeled product (max.4,000) is packed in a sealed moisture-proof bag. Seven bags are packed in an inner box (size: about 260 X 230 X 100 mm) and four inner boxes are in an outer box (size: about 480 X 275 X 215 mm). On the label of moisture-proof bag, there should be the information of Part No., Lot No. and quantity number; also the total quantity number should be on inspection request form on outer box.

## ■ Precautions

---


### 1. Abnormal situation caused by improper setting of collet

To choose the right collet is the key issue in improving the product's quality. LED is different from other electronic components, which is not only about electrical output but also for optical output. This characteristic made LED more fragile in the process of SMT. If the collet's lowering down height is not well set, it will bring damage to the gold wire at the time of collet's picking up and loading which will cause the LED fail to light up, light up now and then or other quality problems


### 2. How to choose the collet

During SMT, please choose the collet that has larger outer diameter than the lighting area of lens, in case that improper position of collet will damage the gold wire inside the LED. Different collets fit for different products, please refer to the following pictures cross out

**Outer diameter of collet should be larger than the lighting area**



Picture 1(√)



Picture 2(X)

### 3. Other points for attention

- A. No pressure should be exerted to the epoxy shell of the SMD under high temperature.
- B. Do not scratch or wipe the lens since the lens and gold wire inside are rather fragile and cross out easy to break.
- C. LED should be used as soon as possible when being taken out of the original package, and should be stored in anti-moisture and anti-ESD package.

### 4. This usage and handling instruction is only for your reference.

**■ Test Items and Results of Reliability**

Test Item	Test Conditions	Duration/ Cycle	Number of Damage	Reference
Temperature Cycle	-40°C 30min ↑↓ 1 min 100°C 30min	100 cycles	0/22	JEITA ED-4701 300 303
High Temperature Storage	T <sub>a</sub> =100°C±5°C	1000 hrs	0/22	EIAJED-4701 200 201
High Humidity Heat Life Test	T <sub>a</sub> =85°C RH=85% I <sub>F</sub> =20mA	500 hrs	0/22	Tested with Brightek standard
Humidity Heat Storage	T <sub>a</sub> =85°C RH=85%	1000 hrs	0/22	EIAJED-4701 100 103
Life Test	T <sub>a</sub> =25°C I <sub>F</sub> =20mA	1000 hrs	0/22	Tested with Brightek standard
Low Temperature Life Test	T <sub>a</sub> =-40°C I <sub>F</sub> =20mA	1000 hrs	0/22	Tested with Brightek standard
High Temperature Life Test	T <sub>a</sub> =85°C I <sub>F</sub> =20mA	1000 hrs	0/22	Tested with Brightek standard

**\*Criteria for Judging**

Item	Symbol	Condition	Criteria for Judgment of Pass	
			Min	Max
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	USL* <sup>1</sup> ×1.1
Reverse Current	I <sub>R</sub>	V <sub>R</sub> = 5V	-	10μA
Luminous Intensity	I <sub>v</sub>	I <sub>F</sub> =20mA	LSL* <sup>2</sup> ×0.7	-

[Note] USL\*<sup>1</sup>: Upper Specification Level

LSL\*<sup>2</sup>: Lower Specification Level