



**BRIGHTTEK**  
**BRIGHTTEK (EUROPE) LIMITED**

*Brighten up The World With LED!*



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

## PRODUCT DATASHEET



- ▶ EMC 2-PIN SMD
- ▶ 1A1A 0.8t (10x10mm)
- ▶ Warm White (2700K)

NOW45S66



Release Date: 26 April 2018 Version: A1.1



1 A 1 A E M C S e r i e s

### 1A1A EMC Series

**RoHS Compliant**



#### FEATURES:

- **Package:** Top View EMC Package
- **Forward Current:** 540mA
- **Forward Voltage (typ.):** 37.3V
- **Luminous Flux (typ.):** 2400lm@540mA
- **Colour:** Warm White
- **Colour Temperature (CCT):** 2700K
- **Viewing angle:** 120°
- **Materials:**
  - Die: InGaN
  - Resin: Silicon (Yellow Diffused)
  - Package: EMC
- **Operating Temperature:** -40~+105°C
- **Storage Temperature:** -40~+100°C
- **Electrostatics Discharge:** 5000V
- **Grouping parameters:**
  - Forward Voltage
  - Luminous Flux
  - CIE Chromaticity
- **Soldering methods:** Reflow Soldering
- **MSL Level:** MSL3 according to J-STD020
- **Packing:** 16mm tape with Max.800/reel, ø178mm (7.5")

#### APPLICATIONS:

- General Lighting
- Portable Lighting
- Commercial Lighting
- Indoor Lighting
- Backlight for LCD

## CHARACTERISTICS:

### Absolute Maximum Characteristics (Ta=25°C, RH=60%)

Parameter	Symbol	Ratings	Unit
DC Forward Current	I <sub>F</sub>	600	mA
Pulse Forward Current (Duty 1/10, width≤100μS)	I <sub>PF</sub>	860	mA
Power Dissipation	P <sub>D</sub>	22	W
Reverse Voltage	V <sub>R</sub>	5	V
Reverse Current @10V	I <sub>R</sub>	10	μA
Junction Temperature	T <sub>j</sub>	125	°C
Electrostatic Discharge	ESD	5000	V
Thermal Resistance (Junction to Solder Point)	R <sub>THJS</sub>	1	°C/W
Operating Temperature	T <sub>OPR</sub>	-40~+105	°C
Storage Temperature	T <sub>STG</sub>	-40~+100	°C
Soldering Temperature	T <sub>SOL</sub>	230 or 260 for 10S	°C
Colour Rendering Index	CRI	80	---


### Electrical & Optical Characteristics (Ta=25°C, RH=60%)

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V <sub>F</sub>	35	37.3	39	V	I <sub>F</sub> =540mA
Luminous Flux	Φ <sub>v</sub>	2100	2400	---	lm	I <sub>F</sub> =540mA
Chromaticity Coordinates	X	---	0.4620	---	---	I <sub>F</sub> =540mA
	Y	---	0.4145	---		
Colour Temperature	CCT	2580	2725	2870	K	I <sub>F</sub> =540mA
Viewing Angle	2θ <sub>1/2</sub>	---	120	---	deg	I <sub>F</sub> =540mA

1. Luminous flux (Φ<sub>v</sub>) ±10%, Forward Voltage (V<sub>F</sub>) ±0.1V


## OUTLINE DIMENSION:

### Package Dimension:

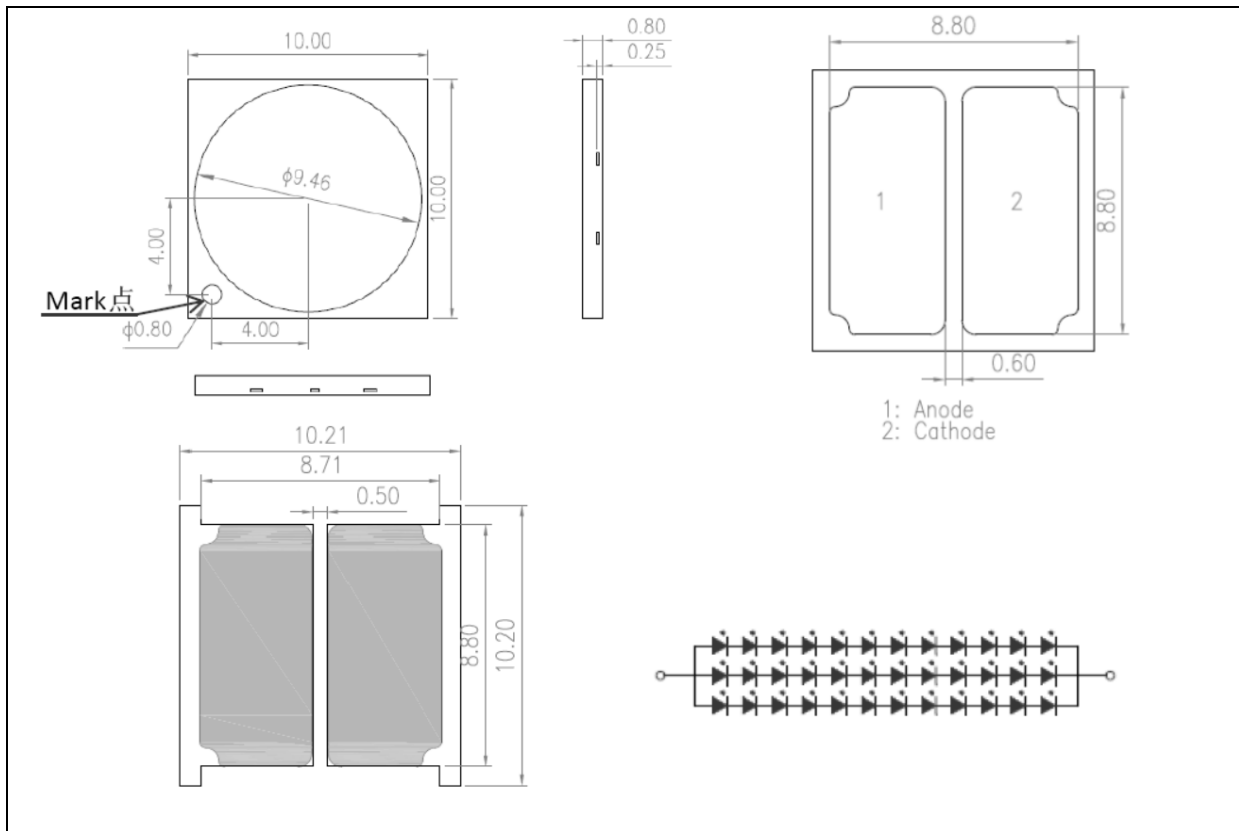

1. All dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.2$ mm, unless otherwise noted.

### Recommended Soldering Pad Dimension:

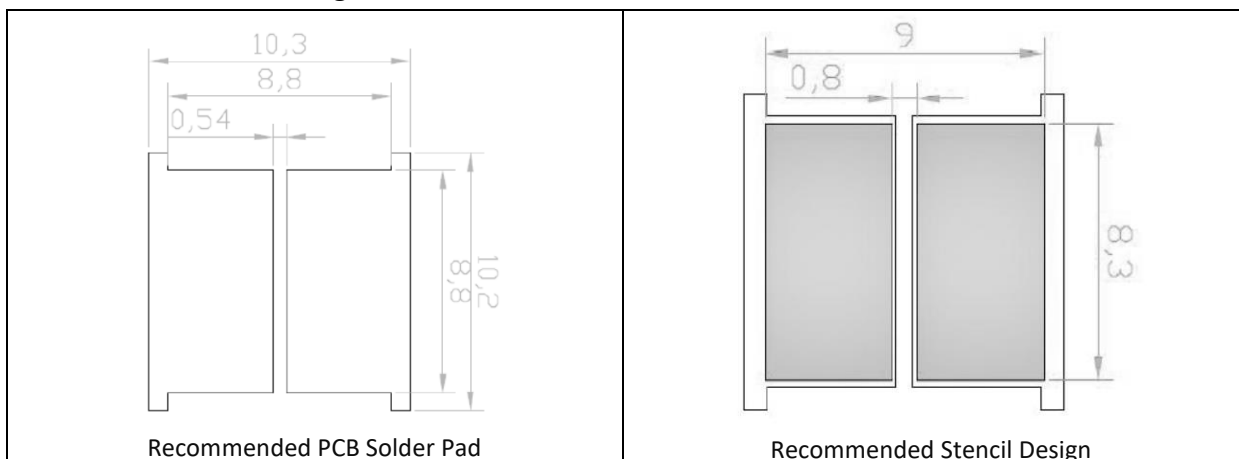

1. Dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.1$ mm with angle tolerance  $\pm 0.5^\circ$ .

**BINNING GROUPS:**



---


 Forward Voltage Classifications ( $I_F = 540\text{mA}$ ):

Code	Min.	Max.	Unit
6K	34	36	V
6L	36	38	
6M	38	40	

 Luminous Flux Classifications ( $I_F = 540\text{mA}$ ):


Code	Min.	Max.	Unit
3W	2100	2250	lm
3X	2250	2400	
3Y	2400	2550	
3Z	2550	2700	

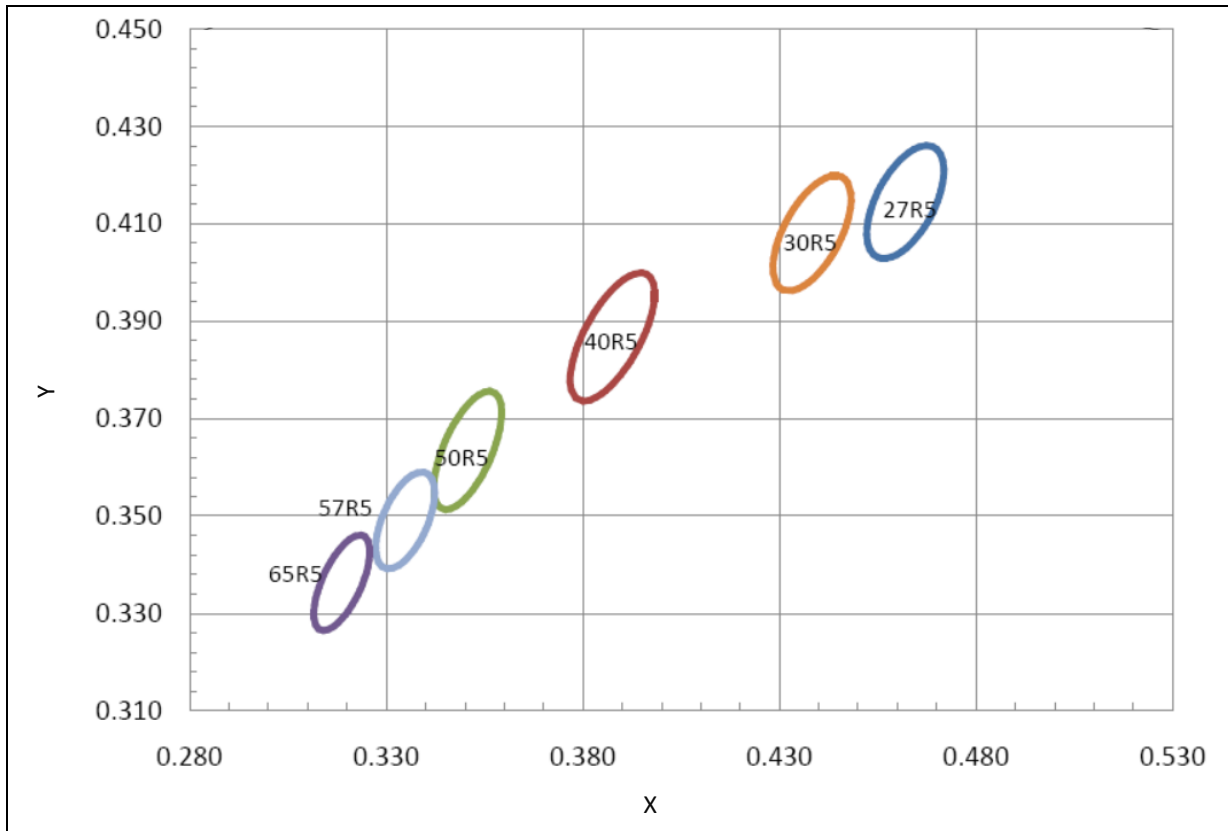**CIE CHROMATICITY DIAGRAM:**

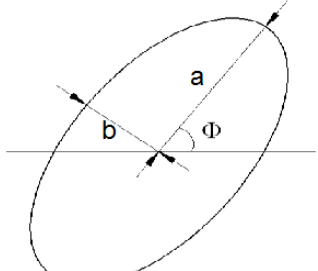**Chromaticity Coordinates Classifications ( $I_F = 540\text{mA}$ ):**


	Code	Centre		Radius		Angle
		X	Y	a	b	$\Phi$
	27R5	0.4620	0.4145	0.01350	0.00700	53.42

## ELECTRO-OPTICAL CHARACTERISTICS:

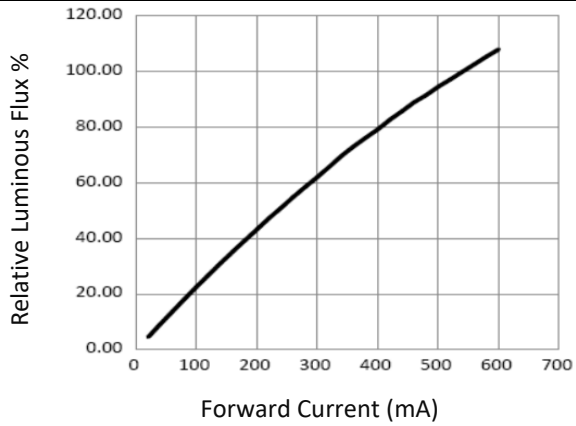
Relative Luminous Flux v.s. Forward Current




Forward Current v.s. Forward Voltage

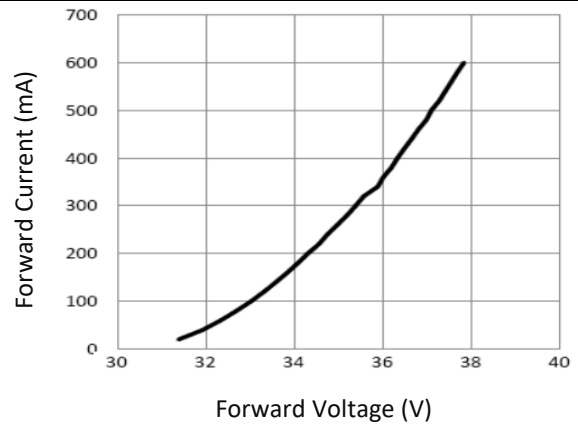


Relative Luminous Flux v.s. Ambient Temp.

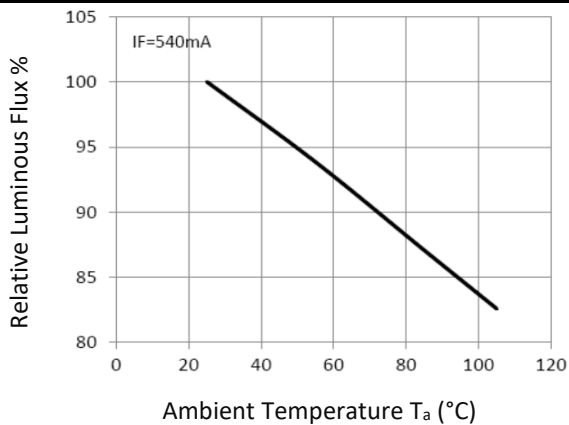


Forward Voltage v.s. Ambient Temp.

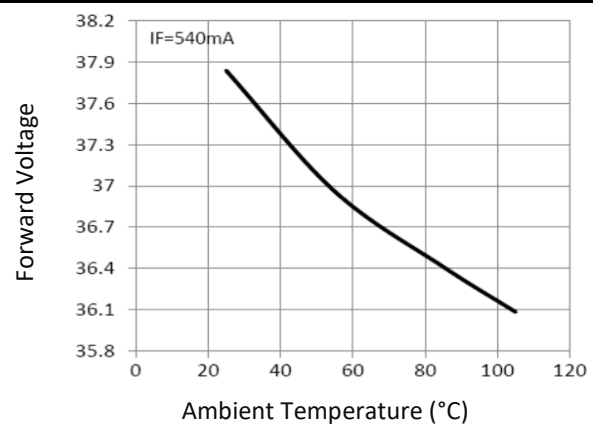


Relative Spectral Power v.s. Wavelength

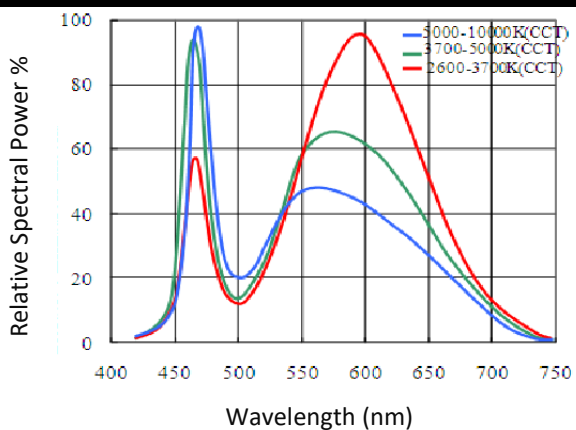


Directive Radiation

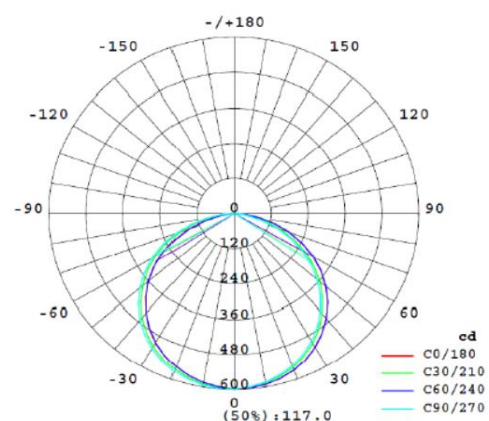

Ambient Temperature v.s. CIE X, Y Shift

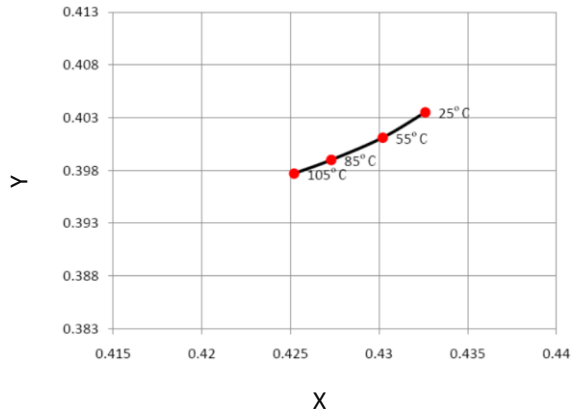


Forward Current Derating Curve

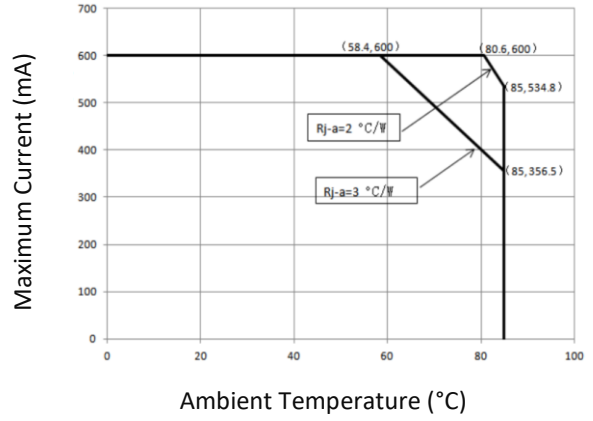

## RECOMMENDED SOLDERING PROFILE:

Reflow Lead-free Solder:

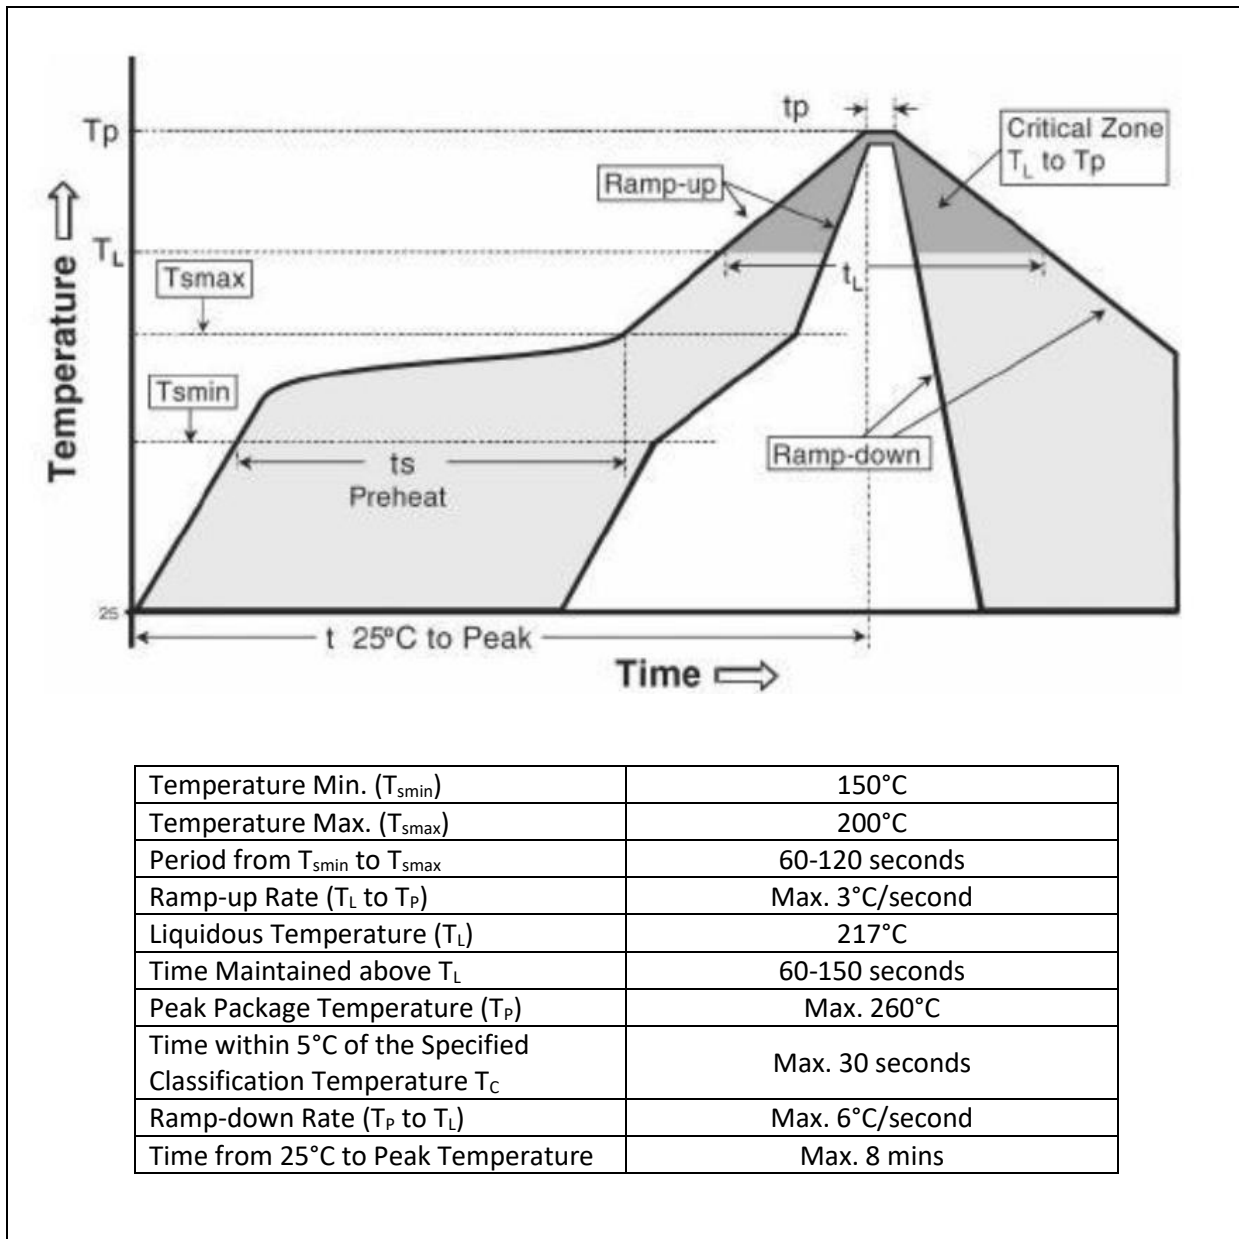


Note:

1. Maximum reflow soldering: 2 times.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.
3. Recommended soldering temperature: 230°C. The maximum soldering temperature should be limited to 260°C for max. 10seconds.



## PACKING SPECIFICATION:

Reel Dimension:

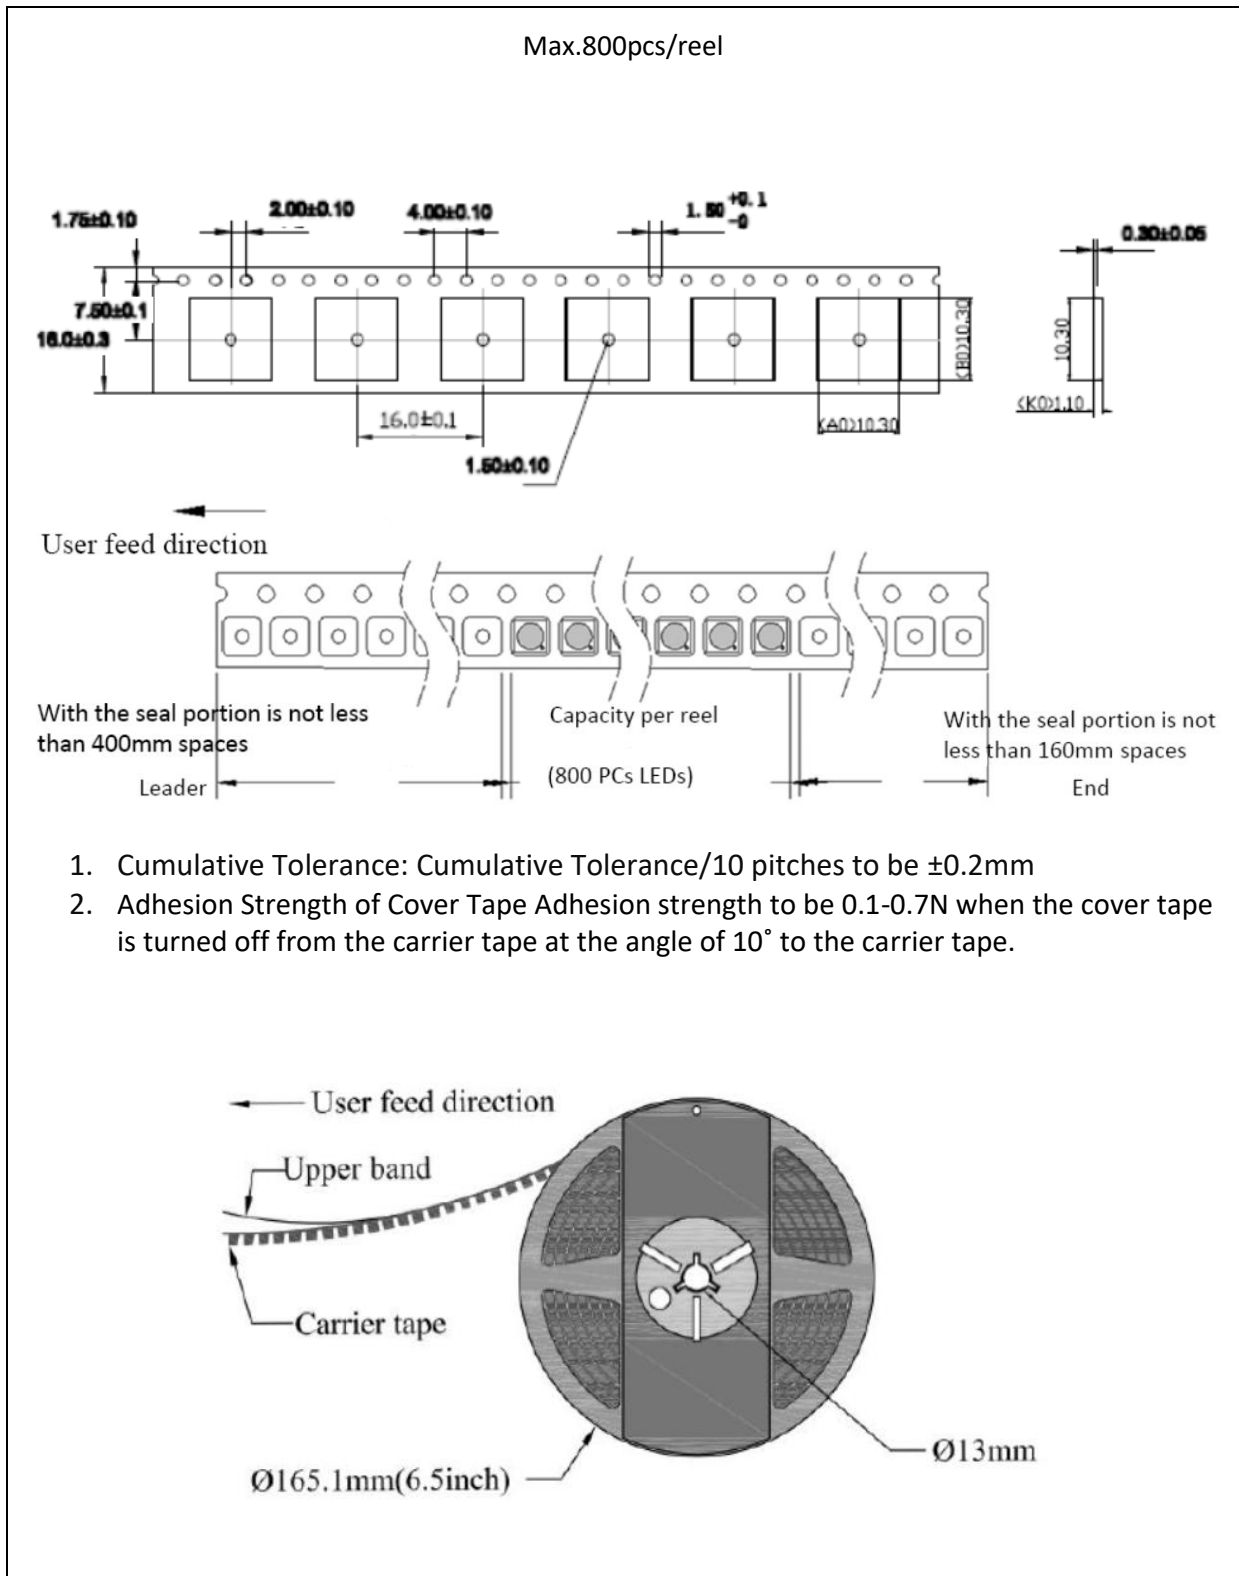

## PRECAUTIONS OF USE:

---

### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent and apply baking at 60°C±5°C for 15hrs before use.


### Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±3°C x 15hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

### Testing Circuit:

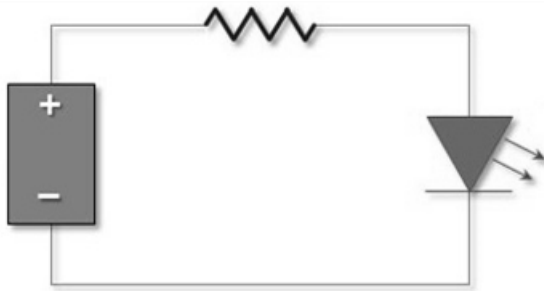

Must apply resistor(s) for protection (over current proof).

### Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

**REVISION RECORD:**

---

Version	Date	Summary of Revision
A1.0	15/07/2016	Datasheet set-up.
A1.1	26/04/2018	New datasheet format.