



BRIGHTTEK
BRIGHTTEK (EUROPE) LIMITED

Brighten up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

PRODUCT DATASHEET



- ▶ PLCC2 SMD
- ▶ 2835 0.7t
- ▶ Warm White (3000K)

NOW55S49 (3/5 STEP)



Release Date: 30 December 2022 Version: A1.3



2835 PLCC2 Series

RoHS
Compliant



FEATURES:

- **Package:** PLCC2 Top View White Package
- **Forward Current:** 150mA
- **Forward Voltage (typ.):** 2.9V
- **Luminous Flux (typ.):** 62lm@150mA
- **Colour:** Warm White
- **Colour Temperature (CCT):** 3000K
- **Viewing angle:** 120°
- **Materials:**
 - Die: InGaN
 - Resin: Silicon (Yellow Diffused)
 - Finish: Ag plated
- **Operating Temperature:** -40~+105°C
- **Storage Temperature:** -40~+100°C
- **Electrostatics Discharge:** 1000V
- **Grouping parameters:**
 - Forward Voltage
 - Luminous Flux
 - CIE Chromaticity
- **Soldering methods:** Reflow Soldering
- **MSL Level:** according to J-STD020 Level 3
- **Packing:** 8mm tape with max.16000/reel, ø330mm/13"

APPLICATIONS:

- General Lighting
- Portable Lighting
- Commercial Lighting
- Indoor Lighting
- Backlight for LCD
- Architectural Lighting

CHARACTERISTICS:

Absolute Maximum Characteristics (Ta=25°C, RH=60%)

| Parameter | Symbol | Ratings | Unit |
|--|-------------------|--------------------|------|
| DC Forward Current | I _F | 180 | mA |
| Pulse Forward Current (Duty 1/10, width≤100μS) | I _{PF} | 270 | mA |
| Power Dissipation | P _D | 576 | mW |
| Reverse Voltage | V _R | 5 | V |
| Reverse Current @10V | I _R | 10 | μA |
| Junction Temperature | T _j | 120 | °C |
| Electrostatic Discharge | ESD | 1000 | V |
| Thermal Resistance (Junction to Solder Point) | R _{THJS} | 22 | °C/W |
| Operating Temperature | T _{OPR} | -40~+105 | °C |
| Storage Temperature | T _{STG} | -40~+100 | °C |
| Soldering Temperature | T _{SOL} | 230 or 260 for 10S | °C |


Electrical & Optical Characteristics (Ta=25°C, RH=60%)

| Parameter | Symbol | Values | | | Unit | Test Condition |
|--------------------------|-------------------|--------|--------|------|------|-----------------------|
| | | Min. | Typ. | Max. | | |
| Forward Voltage | V _F | 2.8 | --- | 3.2 | V | I _F =150mA |
| Luminous Flux | Φ _V | 55 | 62 | 70 | lm | I _F =150mA |
| Chromaticity Coordinates | X | --- | 0.4383 | --- | --- | I _F =150mA |
| | Y | --- | 0.4081 | --- | | |
| Colour Temperature | CCT | -- | 3000 | --- | K | I _F =150mA |
| Colour Rendering Index | CRI | 90 | 92 | --- | --- | I _F =150mA |
| Viewing Angle | 2θ _{1/2} | --- | 120 | --- | deg | I _F =150mA |

1. Luminous flux (Φ_V) ±10%, Forward Voltage (V_F) ±0.1V

OUTLINE DIMENSION:

Package Dimension:

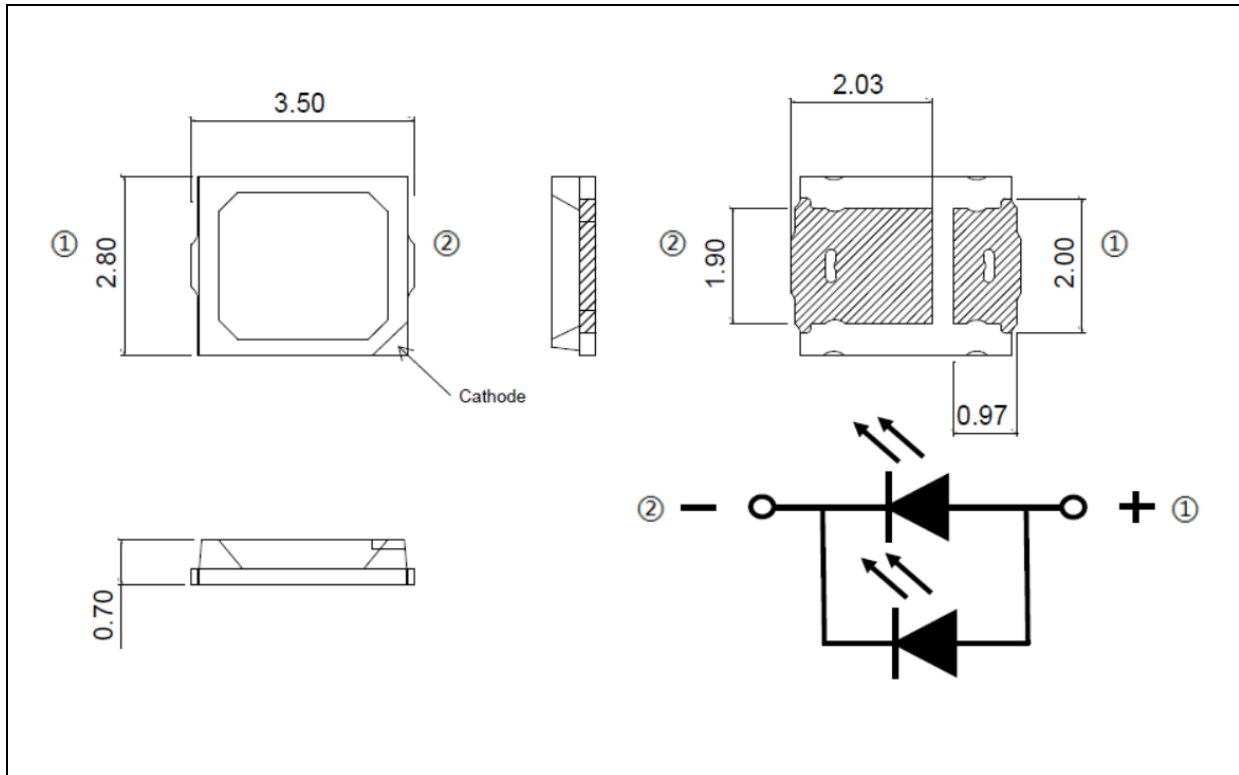

1. All dimensions are in millimetre (mm).
2. Tolerance $\pm 0.2\text{mm}$, unless otherwise noted.


BINNING GROUPS:

 Forward Voltage Classifications ($I_F = 150\text{mA}$):


| Code | Min. | Max. | Unit |
|------|------|------|------|
| B1 | 2.8 | 2.9 | V |
| C1 | 2.9 | 3.0 | |
| D1 | 3.0 | 3.1 | |
| E1 | 3.1 | 3.2 | |

 Luminous Flux Classifications ($I_F = 150\text{mA}$):

| | | | Unit |
|----|----|----|------|
| 1R | 55 | 60 | lm |
| 1S | 60 | 65 | |
| 1T | 65 | 70 | |

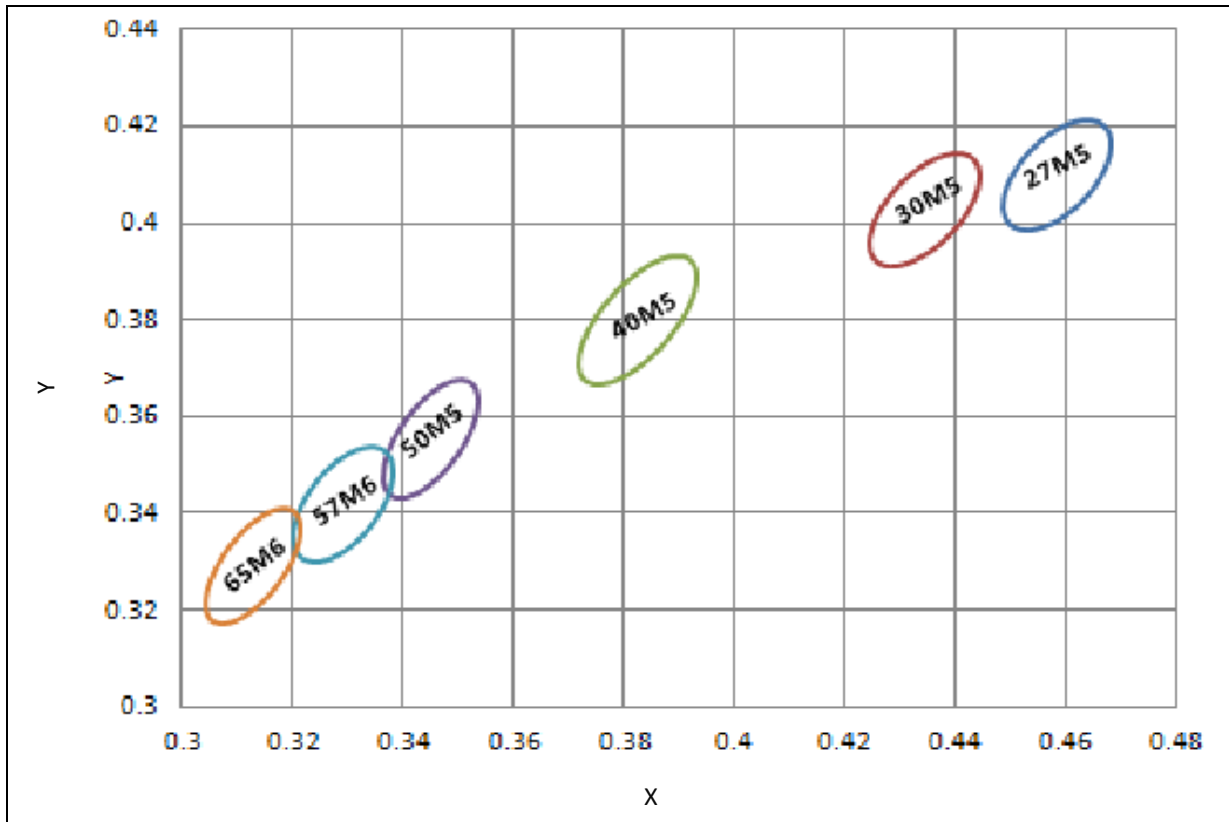
CIE CHROMATICITY DIAGRAM:

Chromaticity Coordinates Classifications ($I_F = 150\text{mA}$):

| Code | Centre | | Radius | | Angle |
|------|--------|--------|----------|----------|--------|
| | X | Y | a | b | Φ |
| 30R5 | 0.4383 | 0.4081 | 0.013900 | 0.006800 | 53.13 |




ELECTRO-OPTICAL CHARACTERISTICS:

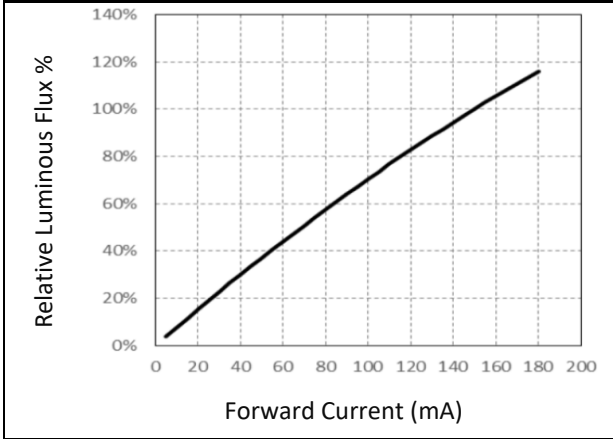
Relative Luminous Flux v.s. Forward Current




Forward Current v.s. Forward Voltage

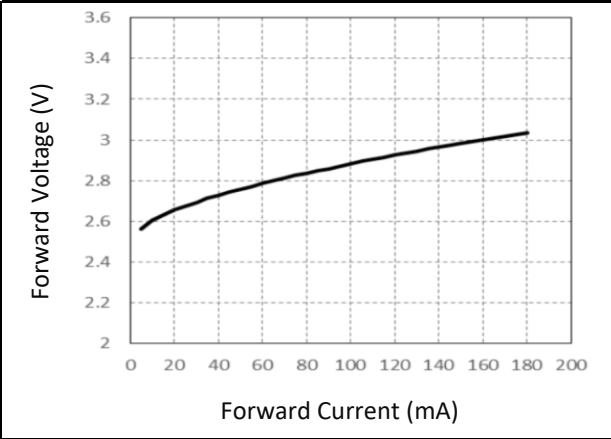


Relative Luminous Flux v.s. Soldering Temp.

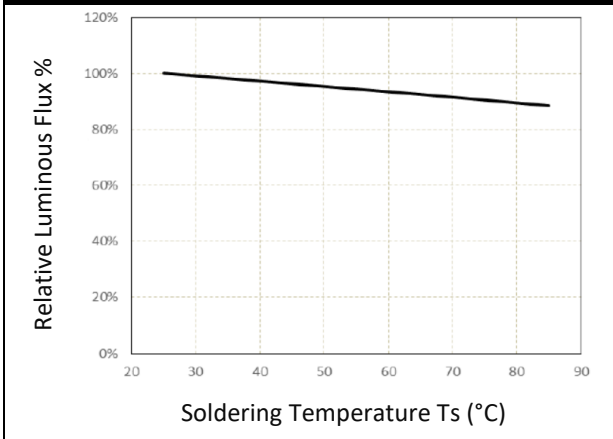


Forward Voltage v.s. Soldering Temp.

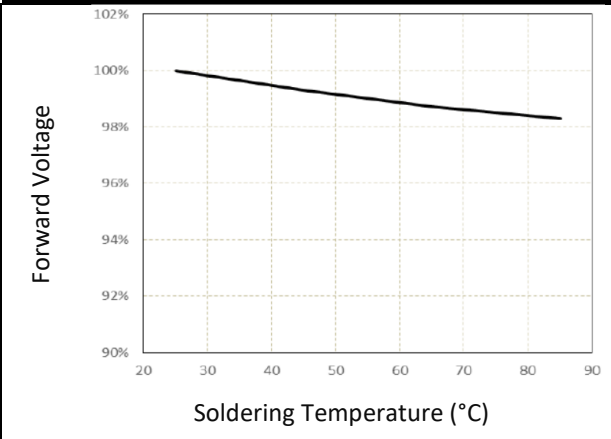


Relative Spectral Power v.s. Wavelength

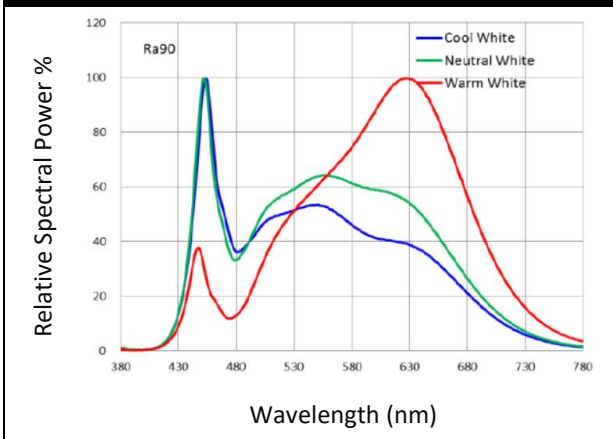

Directive Radiation

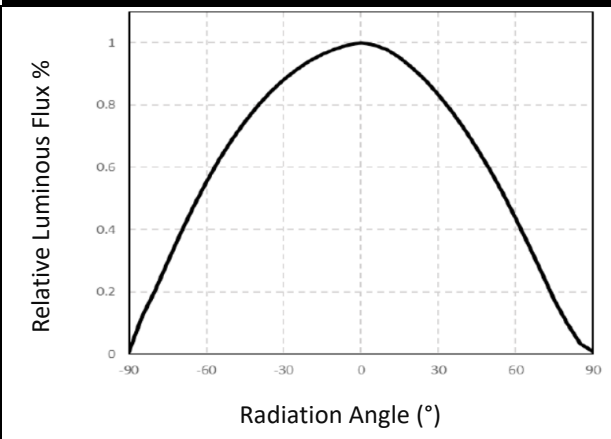


Forward Current Derating Curve

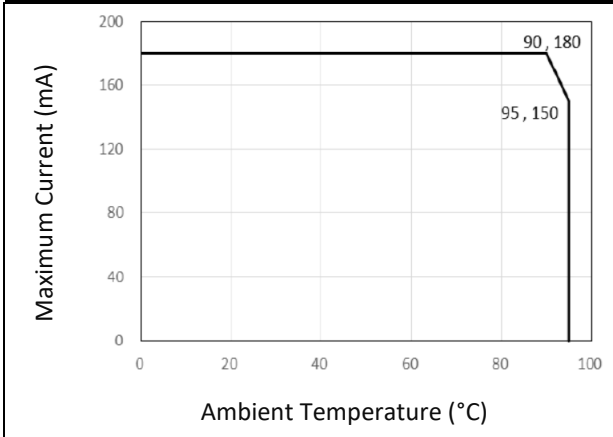

RECOMMENDED SOLDERING PROFILE:

Reflow Lead-free Solder:

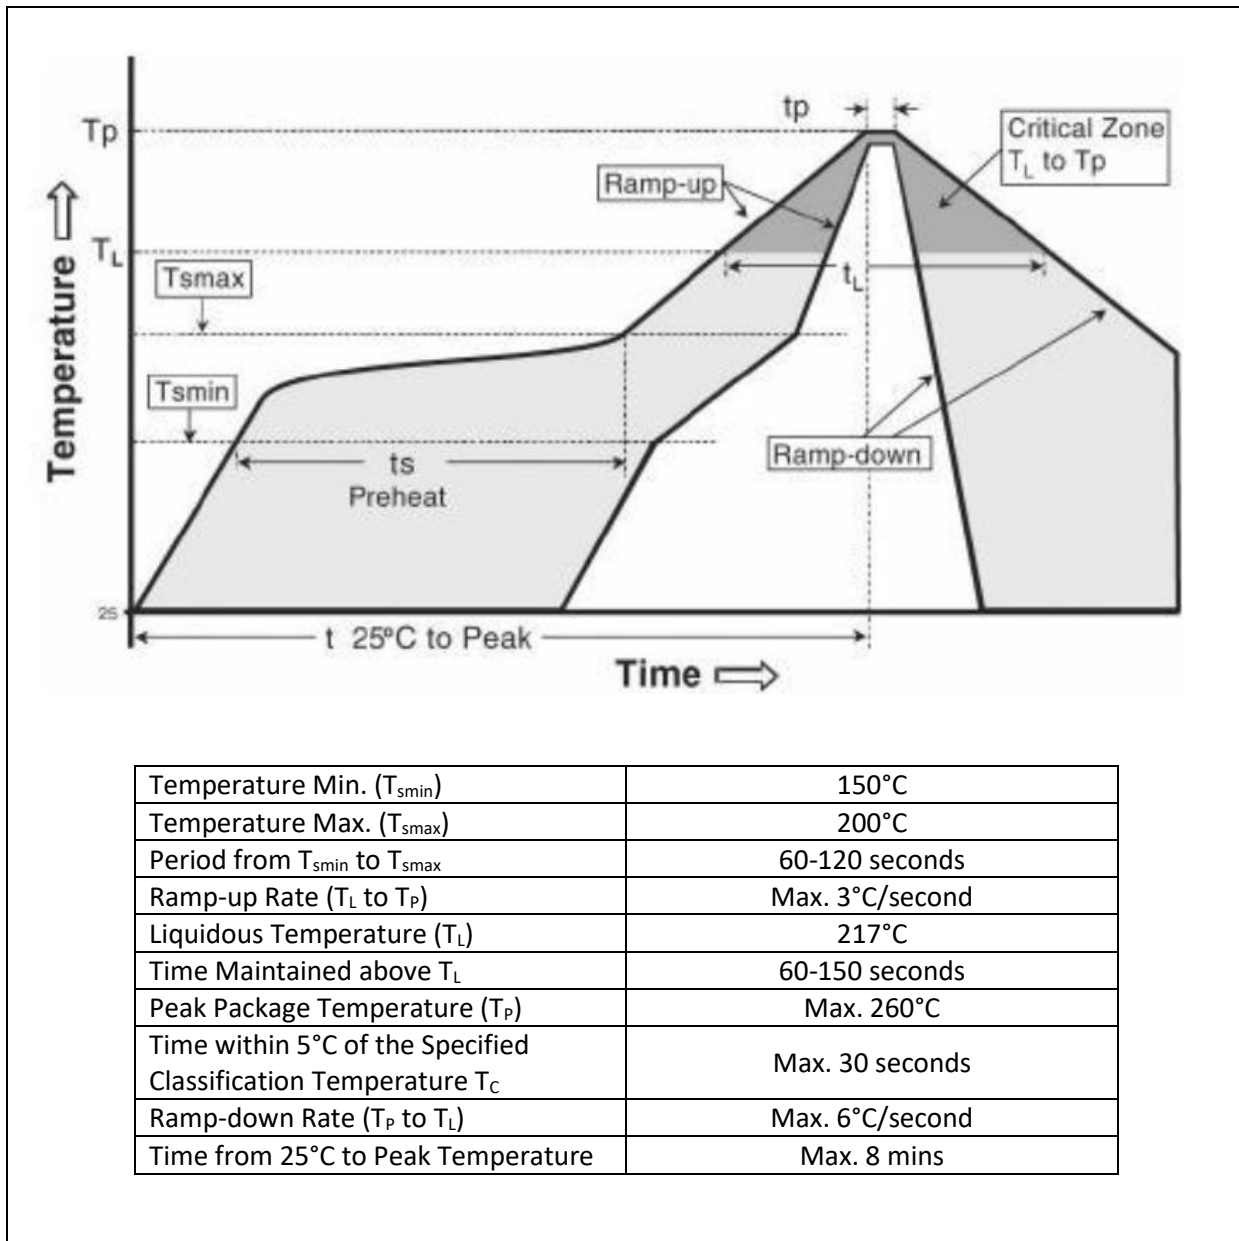


Note:

1. Maximum reflow soldering: 2 times.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.
3. Recommended soldering temperature: 230°C. The maximum soldering temperature should be limited to 260°C for max. 10seconds.

PACKING SPECIFICATION:

Reel Dimension:

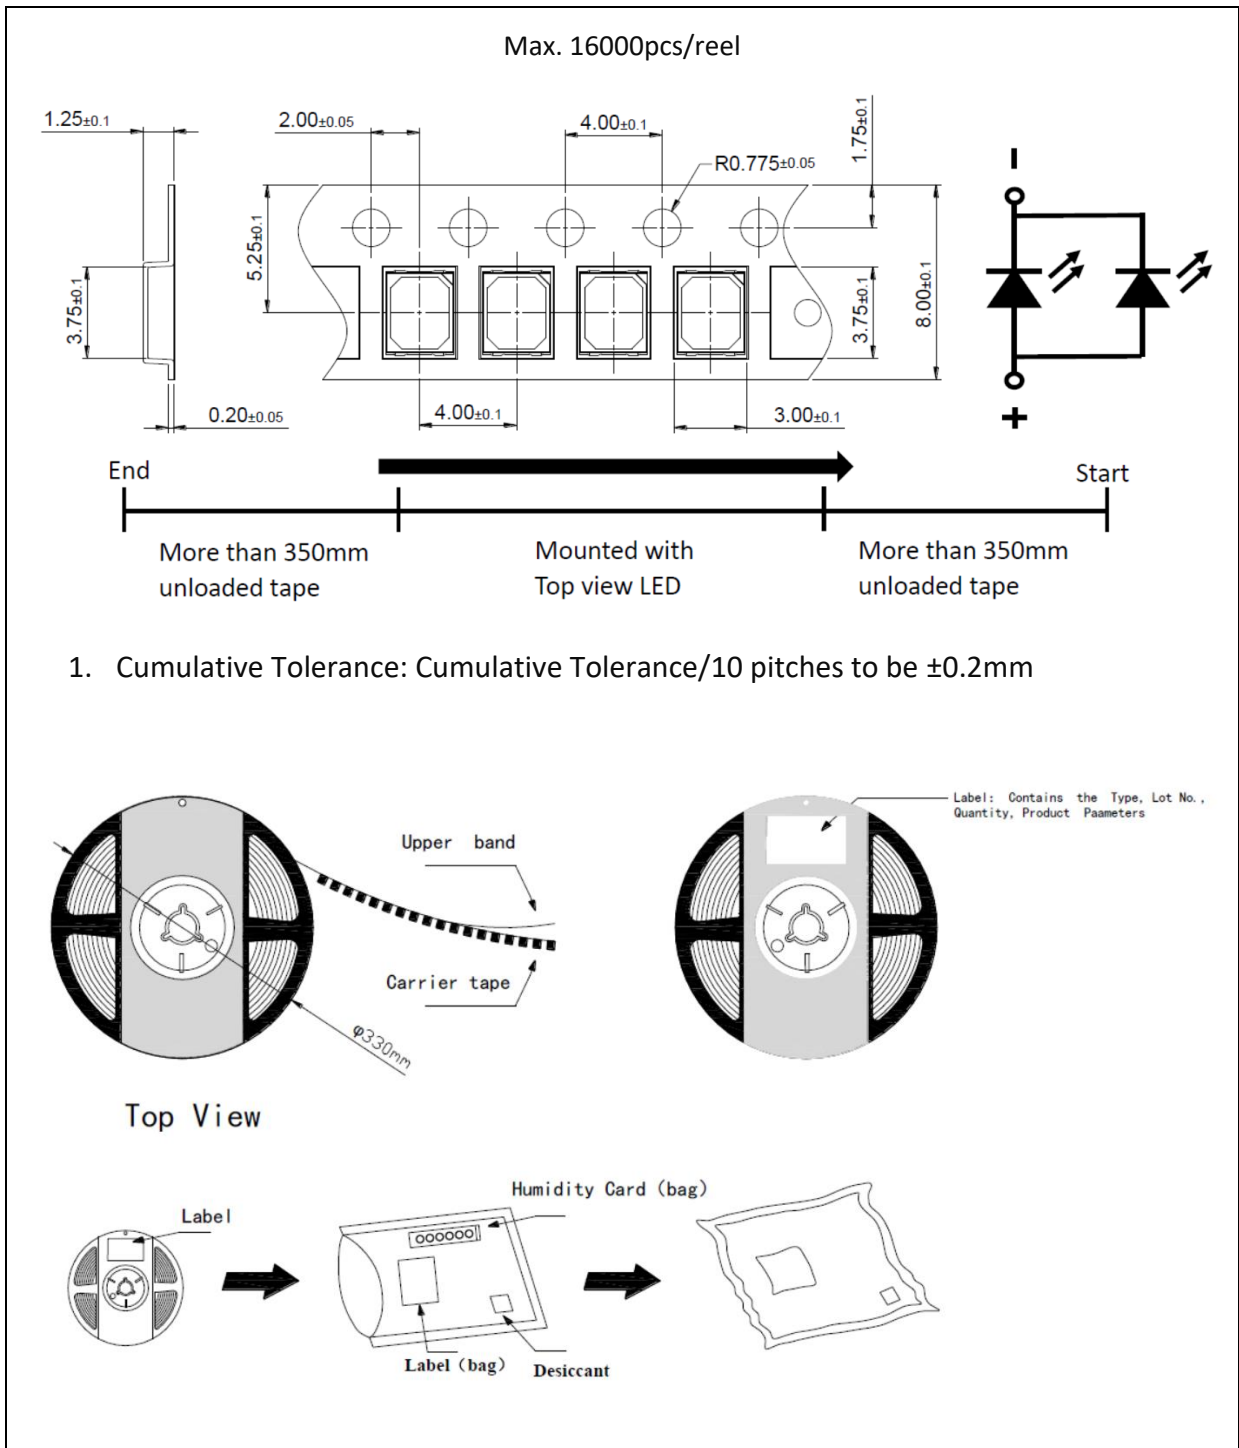

PRECAUTIONS OF USE:

Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking.

Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±5°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

Testing Circuit:



Must apply resistor(s) for protection (over current proof).

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic glove is recommended when handling the LED all time. All devices, equipment, machinery, worktables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

REVISION RECORD:

| Version | Date | Summary of Revision |
|---------|------------|-------------------------------------|
| A1.0 | 21/01/2021 | Datasheet set-up. |
| A1.1 | 07/04/2021 | New datasheet format. |
| A1.2 | 08/12/2021 | Revised ESD level. |
| A1.3 | 30/12/2022 | Update working temperature maximum. |