



BRIGHTTEK
BRIGHTTEK (EUROPE) LIMITED

Brighten up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

PRODUCT DATASHEET




- ▶ CHIP LED Top View
- ▶ 0402 (1005) 0.50t
- ▶ Sky White (Ice Blue)

NOW68S94-5MA



Release Date: 22 July 2026 Version: A1.3

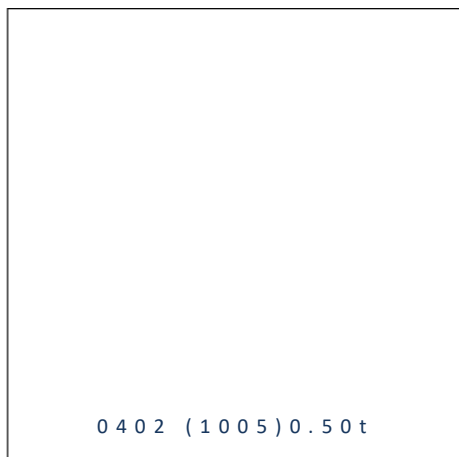

APPLICATIONS:

- Backlighting
- 3C Consumer Goods
- Indicator
- Light Strip

0402 (1005) 0.50t

RoHS
Compliant



FEATURES:

- **Package:** CHIP/PCB SMT Top View Package
- **Forward Current:** 5mA
- **Forward Voltage (typ.):** 3.0V
- **Luminous Intensity (typ.):** 370mcd@5mA
- **Colour:** Sky White (Ice Blue)
- **Colour Temperature (typ.):** X=0.2650; Y=0.2500
- **Viewing Angle (X/Y):** 120/135°
- **Materials:**
 - Resin: Epoxy (Yellow Diffused)
- **Operating Temperature:** -40~+85°C
- **Storage Temperature:** -40~+100°C
- **Grouping Parameters:**
 - Forward Voltage
 - Luminous Intensity
 - CIE Chromaticity
- **Soldering Methods:** Reflow
- **MSL Level:** 2a according to J-STD020
- **Packing:** 8mm tape with max.4000pcs /reel, ø178mm (7")

CHARACTERISTICS:

Absolute Maximum Characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Ratings	Unit
DC Forward Current	I_F	20	mA
Pulse Forward Current Duty Cycle 1/10, 1kHz	I_{PF}	80	mA
Reverse Voltage	V_R	5	V
Reverse Current @5V	I_R	10	μA
Power Dissipation	P_D	78	mW
Operating Temperature	T_{OPR}	-40~+85	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-40~+100	$^{\circ}\text{C}$


Electrical & Optical Characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V_F	---	3.0	3.1	V	$I_F=5\text{mA}$
Luminous Intensity	I_v	---	370	---	mcd	$I_F=5\text{mA}$
Chromaticity Coordinates	X	---	0.2650	---	---	$I_F=5\text{mA}$
	Y	---	0.2500	---		
Viewing Angle	$2\theta_{1/2}$	---	X=120 Y=135	---	deg	$I_F=5\text{mA}$

1. Luminous intensity (I_v) $\pm 10\%$, Forward Voltage (V_F) $\pm 0.1\text{V}$, Viewing angle($2\theta_{1/2}$) $\pm 5^{\circ}$


OUTLINE DIMENSION:

Package Dimension:

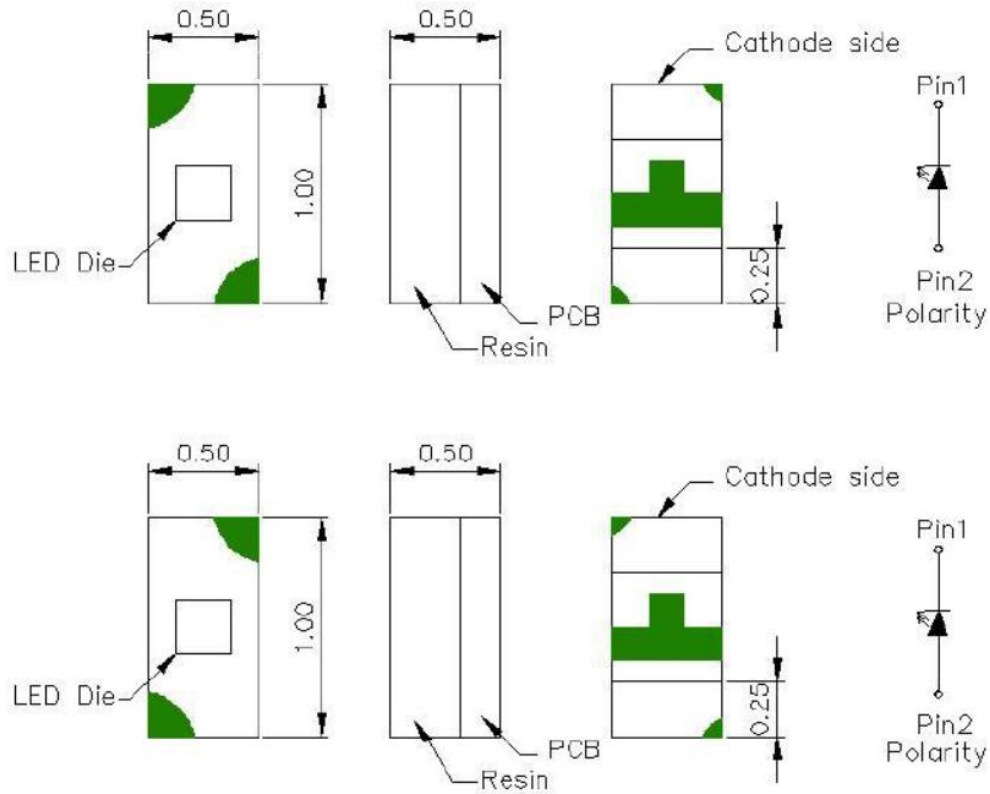

1. All dimensions are in millimetre (mm).
2. Tolerance $\pm 0.13\text{mm}$, unless otherwise noted.

Recommended Soldering Pad Dimension:

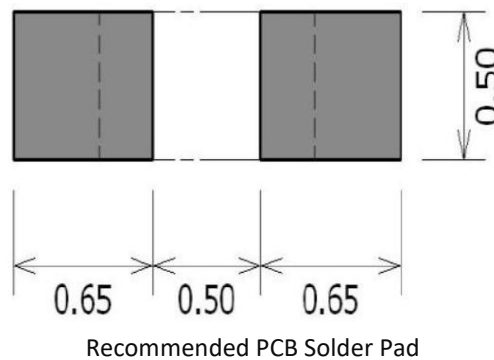

1. Dimensions are in millimetre (mm).
2. Tolerance $\pm 0.12\text{mm}$ with angle tolerance $\pm 0.5^\circ$.

BINNING GROUPS:


Forward Voltage Classifications ($I_F = 5\text{mA}$):

Code	Min.	Max.	Unit
G2	2.5	2.6	V
G3	2.6	2.7	
G4	2.7	2.8	
H1	2.8	2.9	
H2	2.9	3.0	
H3	3.0	3.1	

Luminous Intensity Classifications ($I_F = 5\text{mA}$):

Code	Min.	Max.	Unit
FS2	280	336	mcd
FT1	336	405	
FT2	405	490	

CIE CHROMATICITY DIAGRAM:

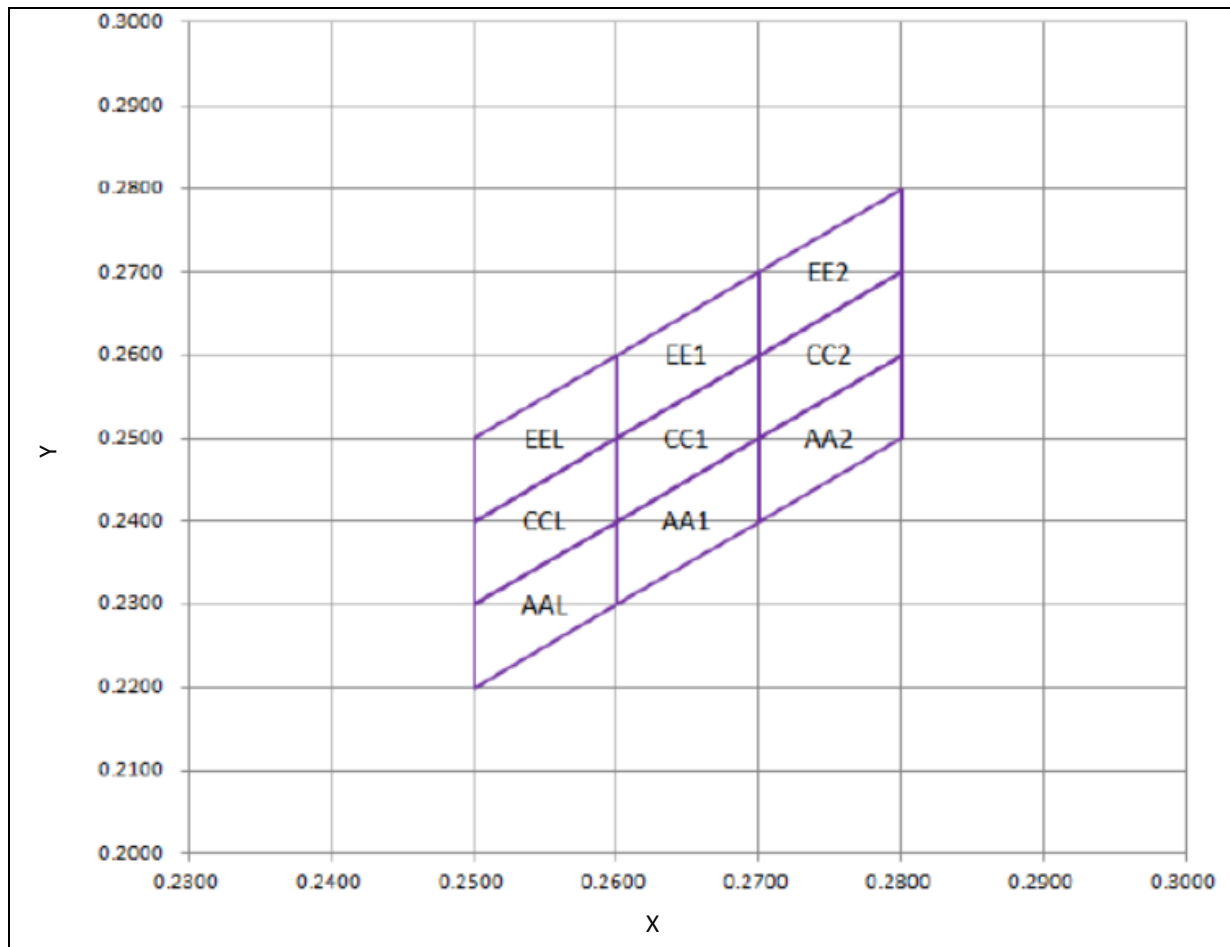


Chromaticity Coordinates Classifications ($I_F = 5\text{mA}$):


	1		2		3		4	
	X	Y	X	Y	X	Y	X	Y
AAL	0.2500	0.2200	0.2500	0.2300	0.2600	0.2400	0.2600	0.2300
AA1	0.2600	0.2300	0.2600	0.2400	0.2700	0.2500	0.2700	0.2400
AA2	0.2700	0.2400	0.2700	0.2500	0.2800	0.2600	0.2800	0.2500
CCL	0.2500	0.2300	0.2500	0.2400	0.2600	0.2500	0.2600	0.2400
CC1	0.2600	0.2400	0.2600	0.2500	0.2700	0.2600	0.2700	0.2500
CC2	0.2700	0.2500	0.2700	0.2600	0.2800	0.2700	0.2800	0.2600
EEL	0.2500	0.2400	0.2500	0.2500	0.2600	0.2600	0.2600	0.2500
EE1	0.2600	0.2500	0.2600	0.2600	0.2700	0.2700	0.2700	0.2600
EE2	0.2700	0.2600	0.2700	0.2700	0.2800	0.2800	0.2800	0.2700

ELECTRO-OPTICAL CHARACTERISTICS:


Relative Luminous Intensity vs. Forward Current

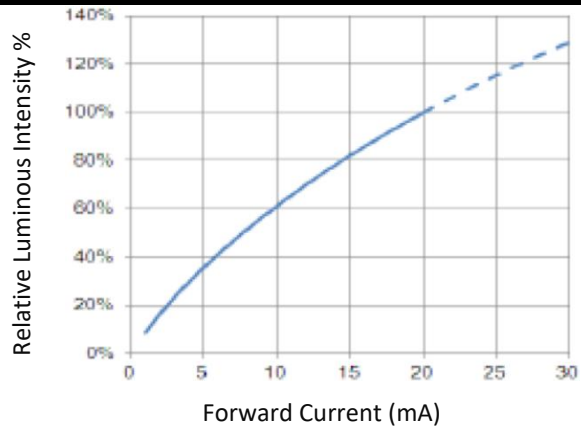


Forward Current vs. Forward Voltage

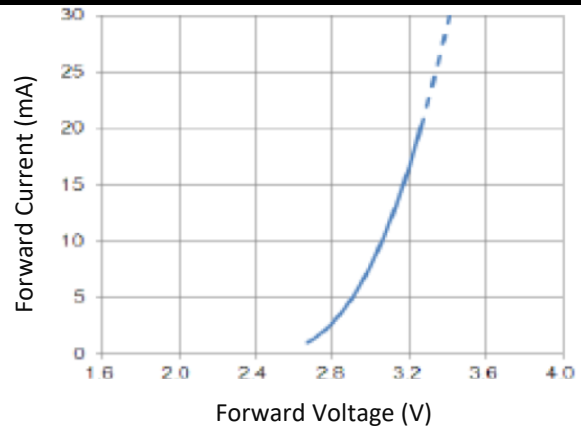


Relative Spectral Power vs. Wavelength

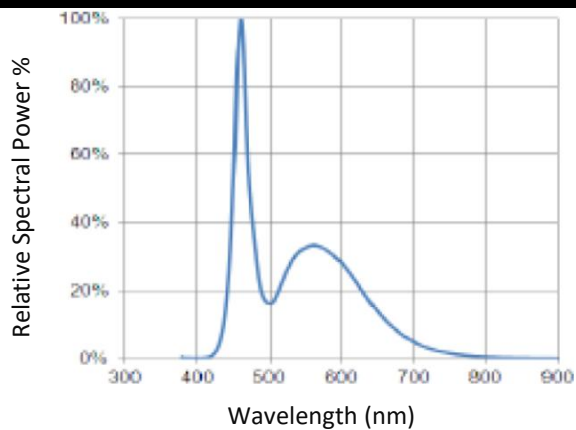


Forward Current Derating Curve

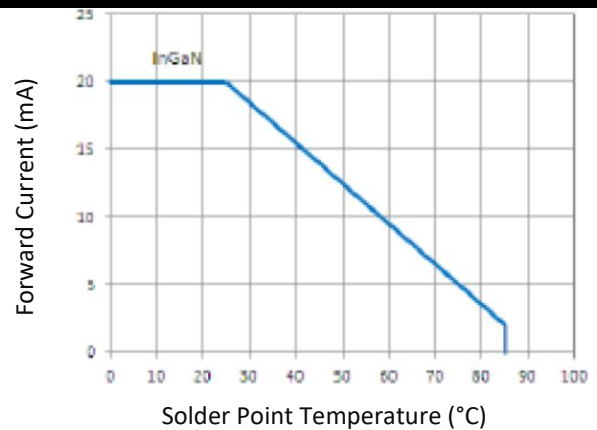

Directive Radiation X

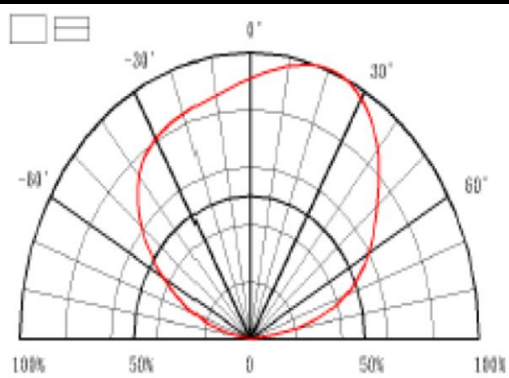


Directive Radiation Y

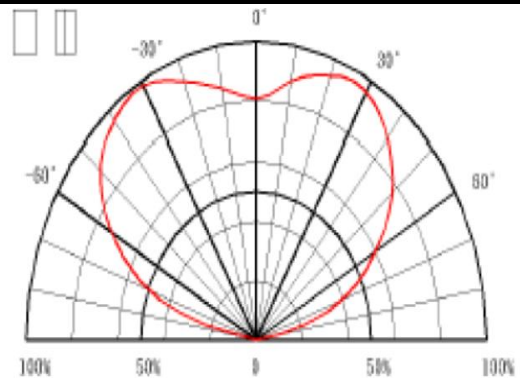



RECOMMENDED SOLDERING PROFILE:

Reflow Lead-free Solder:

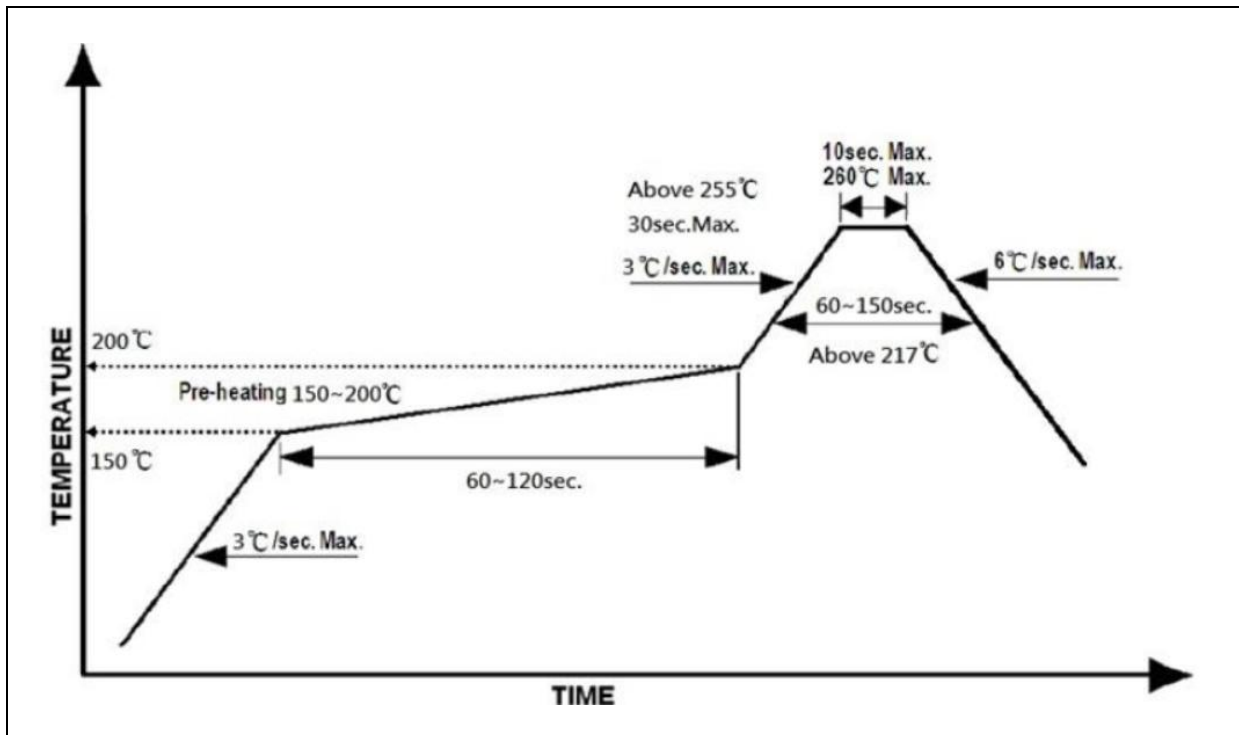


Note:

1. Maximum reflow soldering: 2 times.
2. The recommended reflow temperature is 240°C. The maximum soldering temperature should be limited to 260°C.
3. Before, during, and after soldering, should not apply stress on the components and PCB board.



PACKING SPECIFICATION:

Reel Dimension:

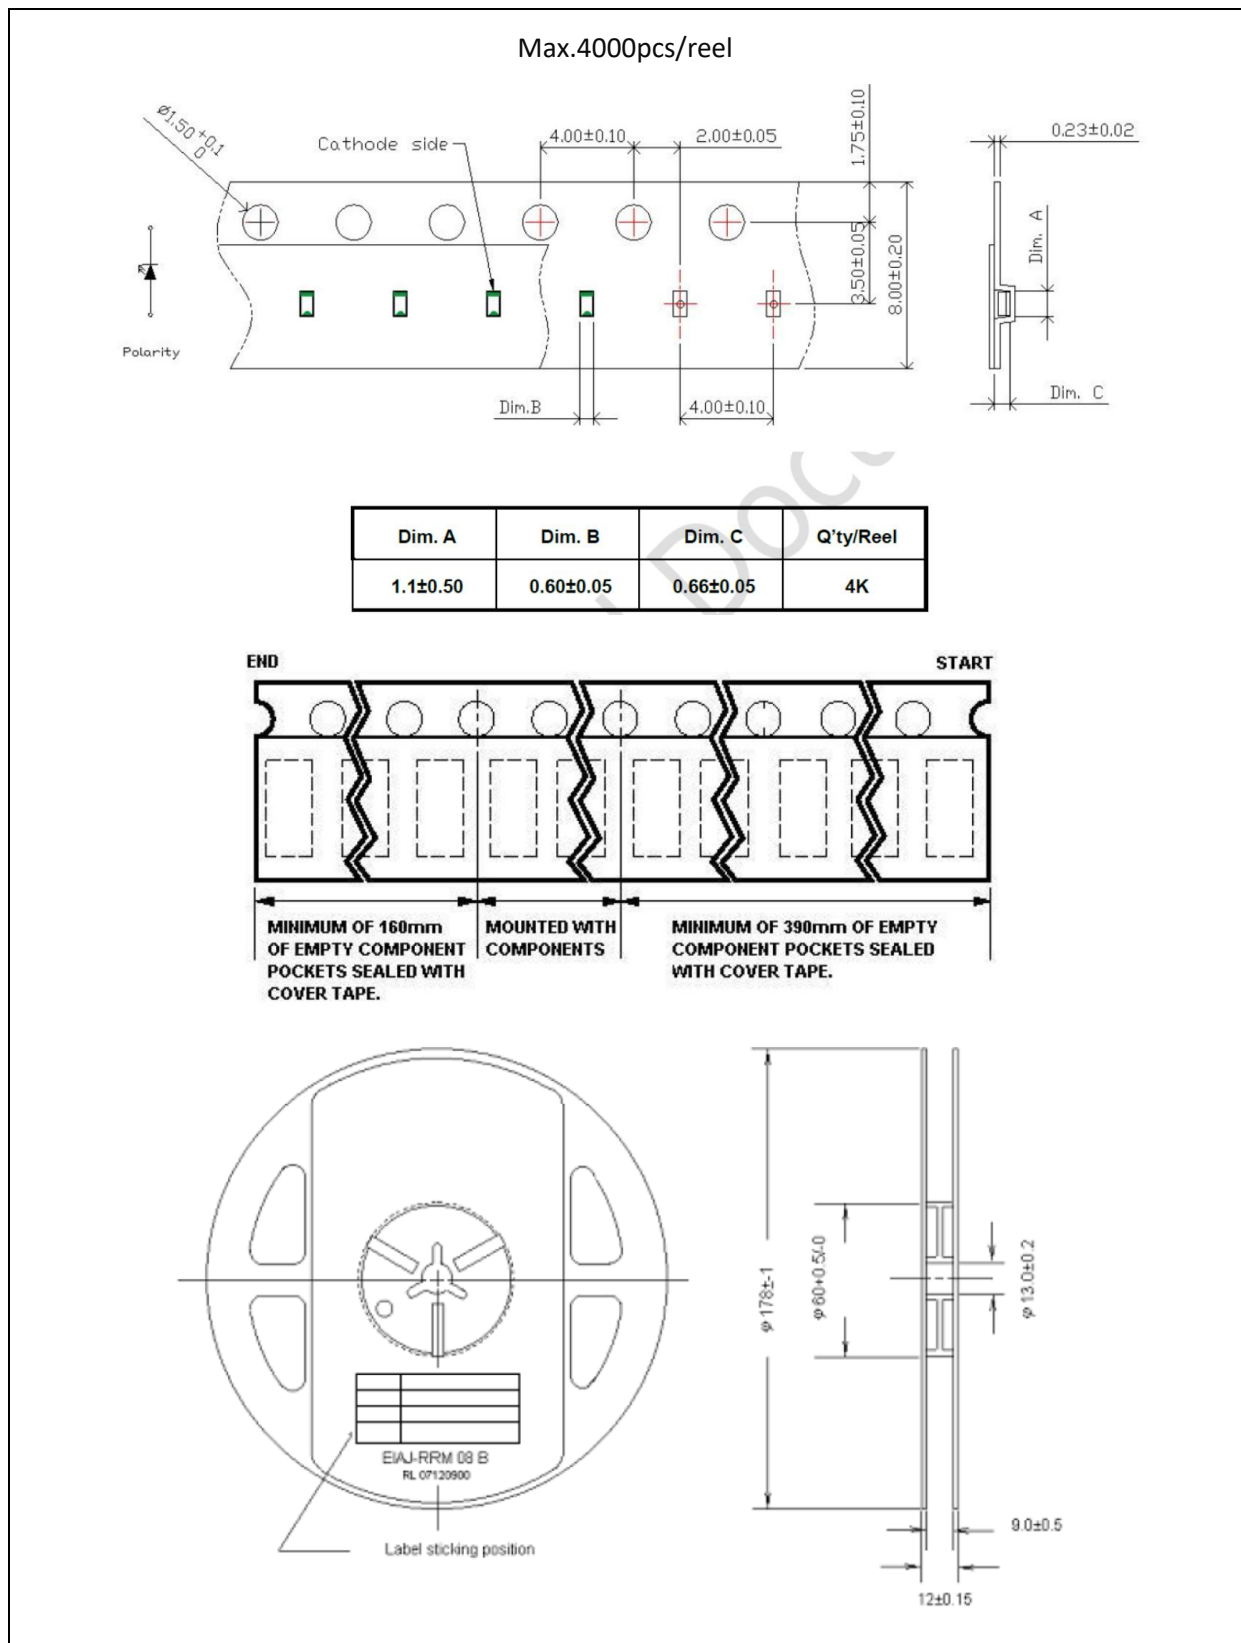

PRECAUTIONS OF USE:

Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within 4 weeks. Otherwise, they should be kept in a damp-proof box with desiccant agent <10% R.H. and apply baking before use.

Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as follows:

- 60±3°C x 12hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

Testing Circuit:



Must apply resistor(s) for protection (over current proof).

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

REVISION RECORD:

Version	Date	Summary of Revision
A1.0	14/03/2024	Datasheet set-up.
A1.1	02/03/2025	New datasheet format.
A1.2	25/06/2026	Update material spec.