



**BRIGHTTEK**  
**BRIGHTTEK (EUROPE) LIMITED**

*Brighten Up The World With LED!*



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

## PRODUCT DATASHEET




- ▶ SuperFlux
- ▶ 3mm Round 4.4t
- ▶ Yellow (590nm)

**NOY62P98S-50MA**



Release Date: 14 October 2022 Version: A1.0

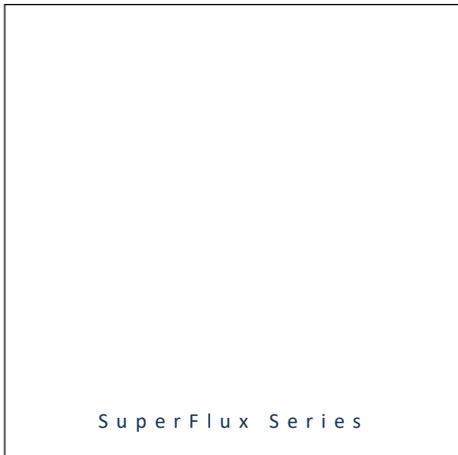

SuperFlux Series

### SuperFlux Series

**RoHS**  
Compliant



#### FEATURES:

- **Package:** THT Through Hole 4 Pins Package
- **Forward Current:** 50mA
- **Forward Voltage (typ.):** 2.2V
- **Luminous Flux (typ.):** 6.3lm@50mA
- **Colour:** Yellow
- **Dominant Wavelength:** 585~592nm
- **Viewing angle:** 40°
- **Materials:**
  - Die: AlGaInP
  - Resin: Epoxy (Water Clear)
  - L/T Finish: Ag plated
- **Operating Temperature:** -30~+80°C
- **Storage Temperature:** -40~+100°C
- **Grouping parameters:**
  - Forward voltage
  - Luminous flux
  - Dominant wavelength
- **Soldering methods:** DIP Iron or Wave Soldering
- **Preconditioning:** acc. to JEDEC Level 3
- **Packing:** 60pcs/tube; 6300pcs/carton

#### APPLICATIONS:

- Decorative Lighting
- Indicator
- Commercial Lighting

## CHARACTERISTICS:

### Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Forward Current	I <sub>F</sub>	50	mA
Peak Forward Current (Duty 1/10; width 10KHz)	I <sub>FP</sub>	100	mA
Reverse Voltage	V <sub>R</sub>	5	V
Reverse Current @5V	I <sub>R</sub>	10	μA
Power Dissipation	P <sub>D</sub>	130	mW
Electrostatic Discharge	ESD	2000	V
Operating Temperature	T <sub>OPR</sub>	-30~+80	°C
Storage Temperature	T <sub>STG</sub>	-40~+100	°C


### Electrical & Optical Characteristics (Ta=25°C)

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V <sub>F</sub>	1.8	---	2.6	V	I <sub>F</sub> =50mA
Luminous Flux	Φ <sub>V</sub>	3.8	6.3	10.7	lm	I <sub>F</sub> =50mA
Dominant Wavelength	λ <sub>D</sub>	585	590	592	nm	I <sub>F</sub> =50mA
Spectral Half Width	Δλ	---	20	---	nm	I <sub>F</sub> =50mA
Viewing Angle	2θ <sub>1/2</sub>	---	40	---	deg	I <sub>F</sub> =50mA

1. Luminous intensity (I<sub>v</sub>) ±10%, Forward Voltage (V<sub>F</sub>) ±0.1V

## OUTLINE DIMENSION:

Package Dimension:

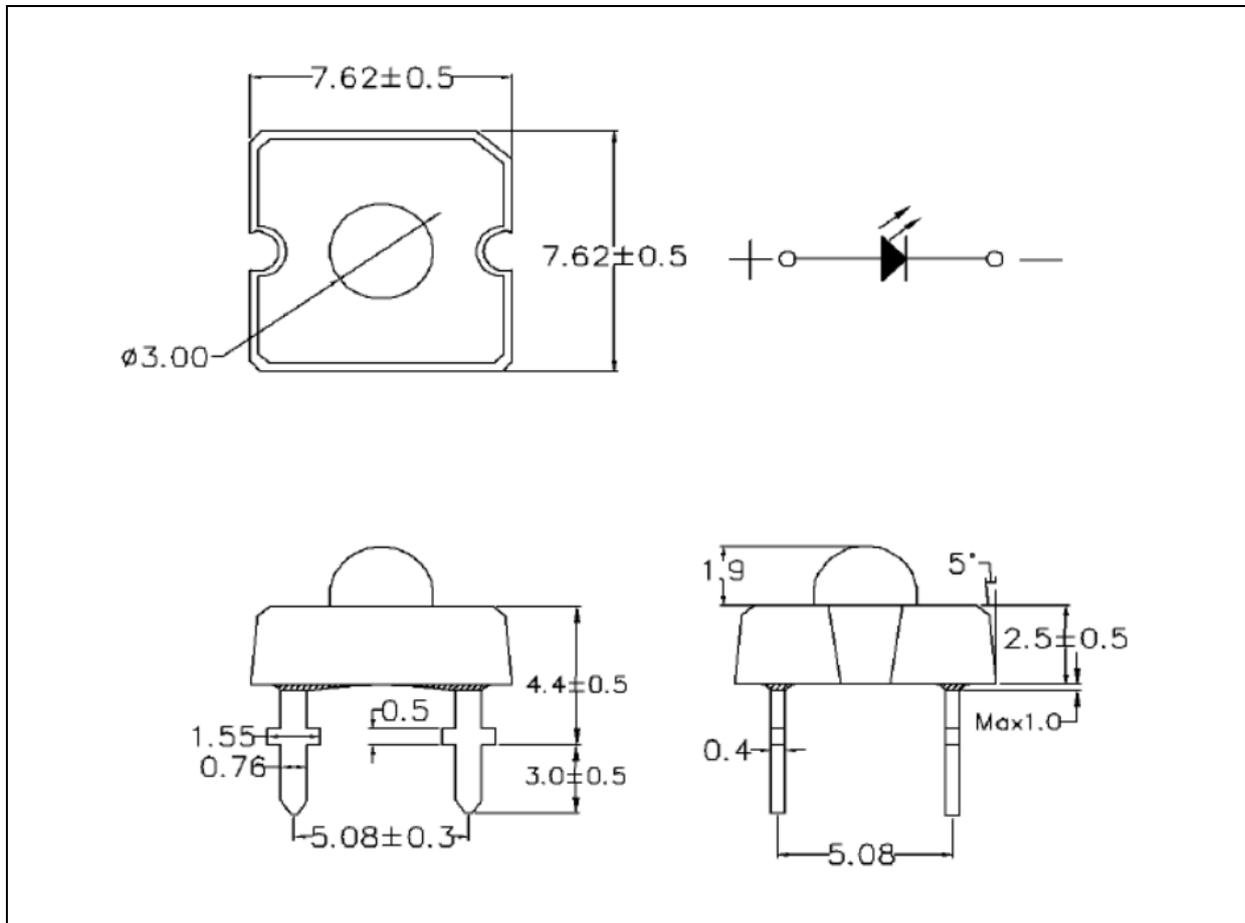

1. All dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.2$ mm, unless otherwise noted.

**BINNING GROUPS:**


---

 Forward Voltage Classifications ( $I_F = 50\text{mA}$ ):

Code	Min.	Max.	Unit
V1820	1.8	2.0	V
V2022	2.0	2.2	
V2224	2.2	2.4	
V2426	2.4	2.6	

 Luminous Flux Classifications ( $I_F = 50\text{mA}$ ):


Code	Min.	Max.	Unit
F13	3.8	4.9	lm
F14	4.9	6.3	
F15	6.3	8.2	
F16	8.2	10.7	

 Dominant Wavelength Classifications ( $I_F = 50\text{mA}$ ):


Code	Min.	Max.	Unit
15	585	587	nm
16	587	589	
17-1	589	590	
17-2	590	591	
17-3	591	592	

**ELECTRO-OPTICAL CHARACTERISTICS:**


Relative Intensity v.s. Forward Current

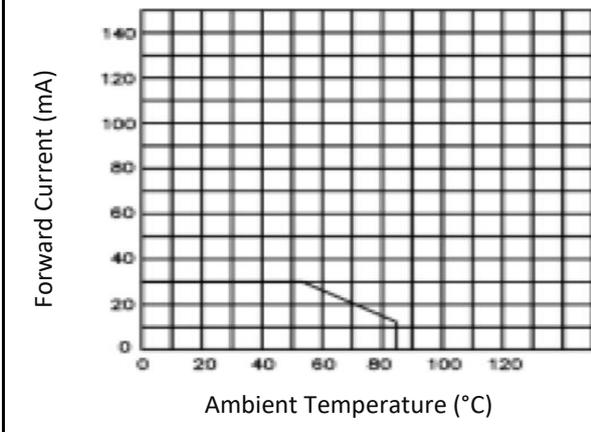


Forward Voltage v.s. Forward Current

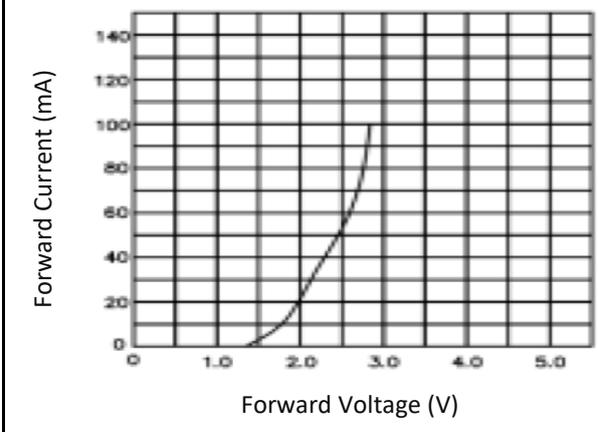


Relative Voltage v.s. Temperature

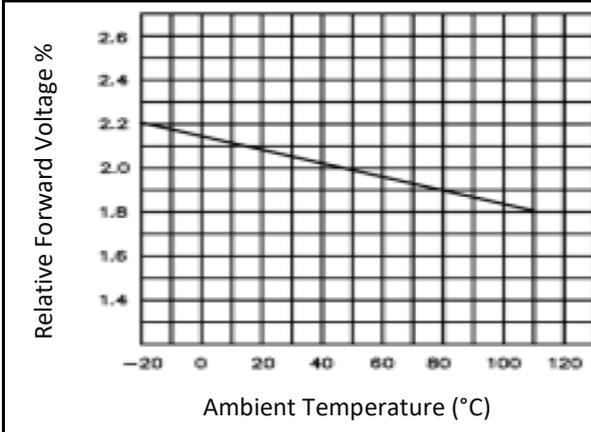


Relative Intensity v.s. Temperature

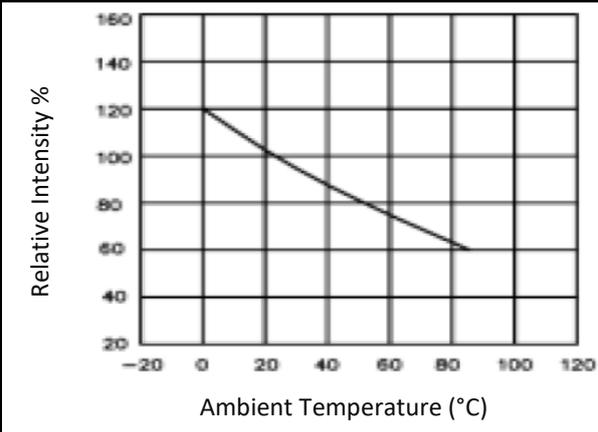

Relative Intensity v.s. Wavelength

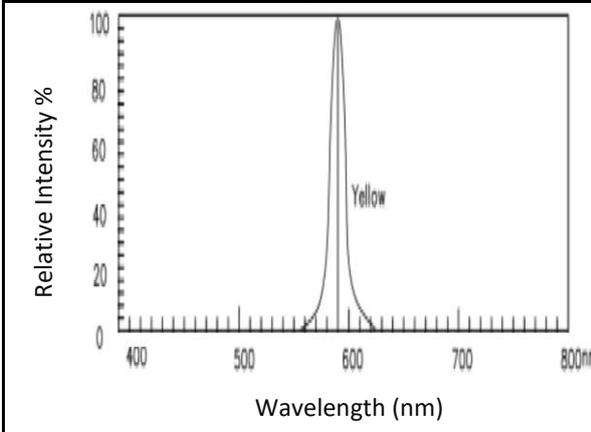

Directive Radiation

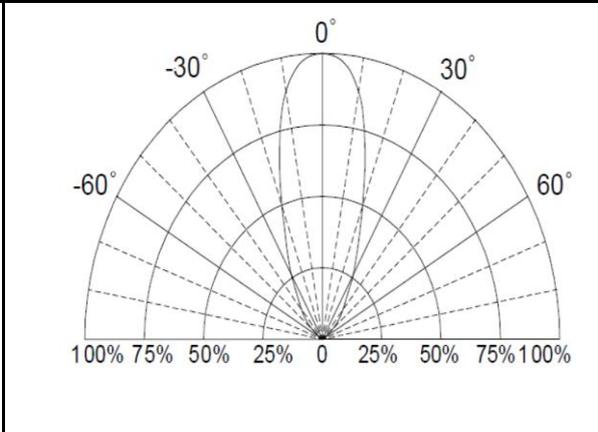


## RECOMMENDED SOLDERING PROFILE:

### DIP Iron:

- Soldering Iron 30W Max.
- Temperature 350°C Max.
- Soldering Time 3 seconds Max. One time only.
- Distance 2mm Min. (from solder joint to body).

### Wave Soldering Profile:

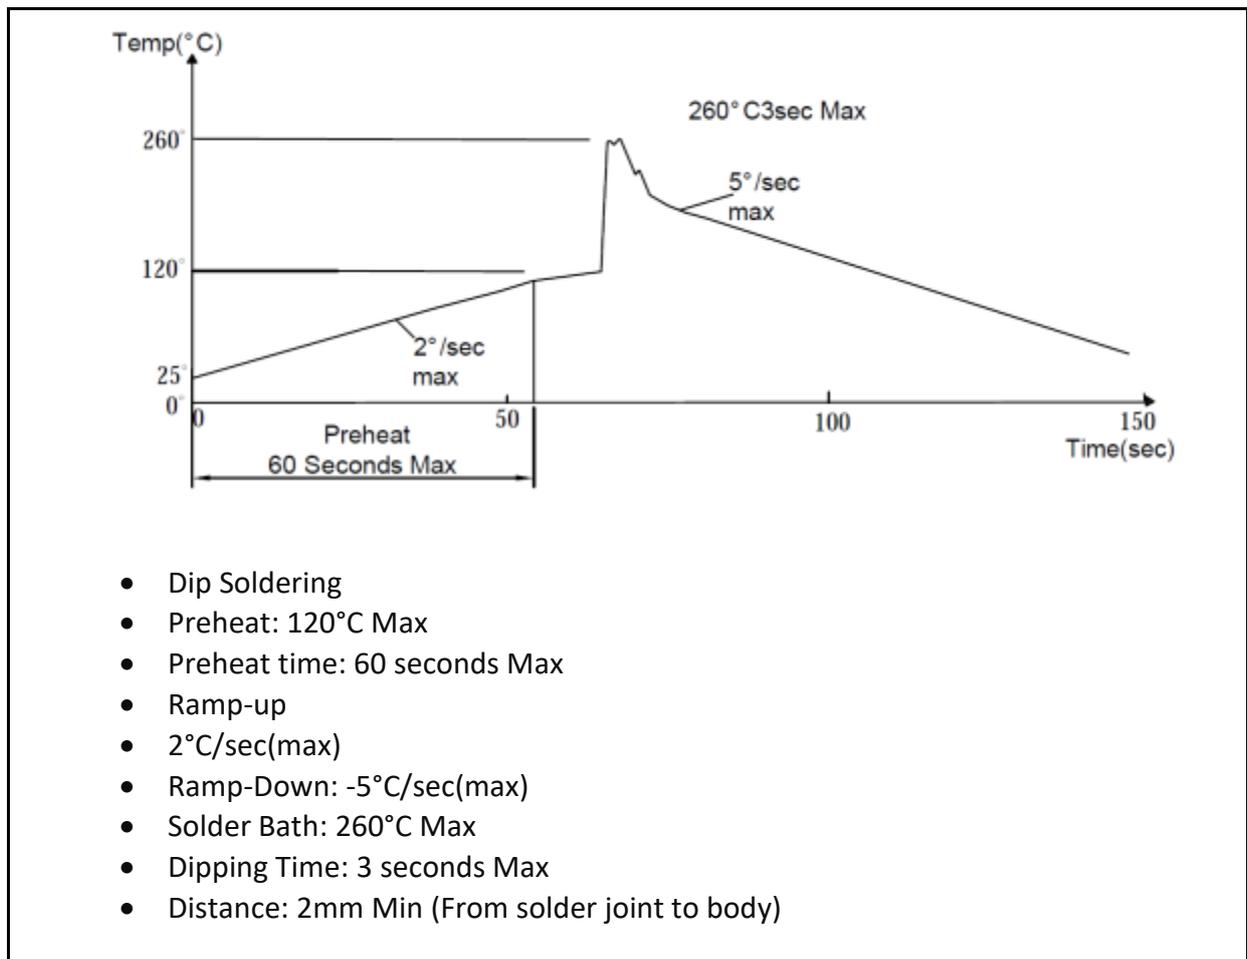

### Note:

1. Maximum reflow soldering: 1 time.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.
3. Recommended reflow temperature 240°C. The maximum soldering temperature should be limited to 260°C.

**PACKING SPECIFICATION:**


---

Reel Dimension:

60pcs/tube; 6300pcs/carton



**60PCS Max / TUBE**

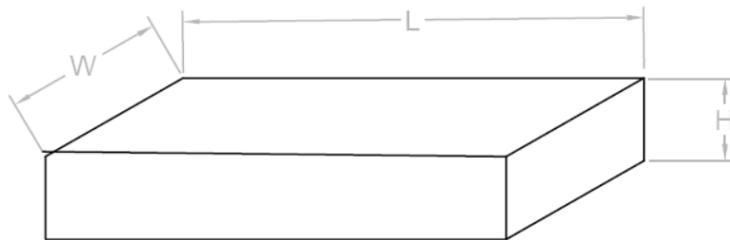

SIZE : L X W X H 55cm X 22.5cm X 10cm  
105TUBES / INNER BOX

## PRECAUTIONS OF USE:

---

### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking.


### Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±3°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

### Testing Circuit:

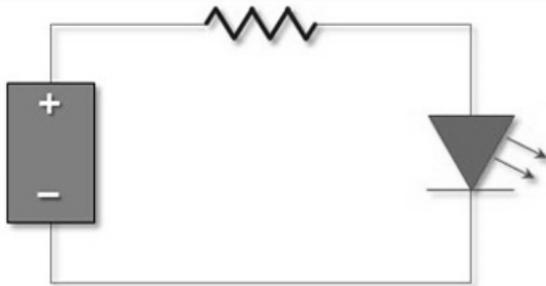

Must apply resistor(s) for protection (over current proof).

### Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

**REVISION RECORD:**

---

Version	Date	Summary of Revision
A1.0	14/10/2022	Datasheet set-up.