



BRIGHTTEK
BRIGHTTEK (EUROPE) LIMITED

Brighten up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

PRODUCT DATASHEET



- ▶ DC Input Photo Coupler
- ▶ SMD8 Gullwing
- ▶ High Speed Logic Gate 10Mbit/s

TD2601(SLM)(T1)-GV



Release Date: 07 June 2025 Version: A00



TD2601(SLM) Series

TD2601(SLM) Series

DESCRIPTION:



The TD2601(SLM) series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a silicon high speed integrated photo-detector logic gate with a strobable output in a plastic DIP8 package with SMD8 Gullwing lead forming option.

FEATURES:

- High isolation 5000Vrms
- DC input with logic gate output
- Operating temperature range -55°C to +100°C
- REACH & RoHS compliance
- MSL class 1
- Regulatory Approvals:
 - UL - UL1577
 - VDE - EN60747-5-5 (VDE0884-5)
 - CQC - GB4943.1, GB8898
 - cUL - CSA Component Acceptance Service Notice 5A
- Packing: 1000pcs/reel

APPLICATIONS:

- Ground loop elimination
- LSTTL to TTL, LSTTL, or CMOS
- Line receiver, data transmission
- Data multiplexing
- Switching power supply
- Pulse transformer replacement
- Computer-peripheral interface



Partner with:  LIGHTNING



NAMING & ORDERING INFORMATION:

Naming Information:

TD2601 (SLM) (T1) - G V	
TD2601	Part Number
SLM	Lead Form Option: SMD8 Gullwing
T1	Selection: Tape and Reel Option (T1(default)/T2)
G	Green Option
V	VDE Option


Ordering Information:

TD2601(SLM)(T1)-GV


Version No.	Original Release Date
Rev: A00	22/06/2021

SCHEMATIC DIAGRAM & MARKING:

Schematic Diagram:

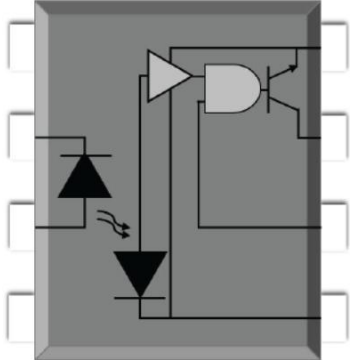	PIN Definition	
	1	NC
	2	Anode
	3	Cathode
	4	NC
	5	GND
	6	VO
	7	VE
	8	VCC

Marking Information:

	Marking Definition	
	TD	Manufacturer Code
	26XX	Part Number & CTR Rank
	V	VDE Applicable
	Y	Fiscal Year
	A	Manufacturing Code
	WW	Work Week

Labelling Information:

	This product is manufactured, tested, and packed by 
	for more details, please visit www.tdled.com

ABSOLUTE CHARACTERISTICS:

Absolute Maximum Ratings:

Parameter	Symbol	Ratings	Unit
INPUT			
Forward Current	I_F	25	mA
Peak Forward Current	I_{FP}	50 * ¹	mA
Peak Transient Current	$I_{F(trans)}$	1 * ²	A
Reverse Voltage	V_R	5	V
Enable Voltage	V_E	$V_{CC}+0.5$	V
Input Power Dissipation	P_I	100	mW
OUTPUT			
Supply Voltage	V_{CC}	7	V
Output Voltage	V_O	7	V
Output Current	I_O	50	mA
Output Power Dissipation	P_O	85	mW
COMMON			
Total Power Dissipation	P_{tot}	200	mW
Isolation Voltage	V_{iso}	5000 * ³	V _{rms}
Operating Temperature	T_{opr}	-55~+100	°C
Storage Temperature	T_{stg}	-55~+125	°C
Soldering Temperature	T_{sol}	260 * ⁴	°C

*1. 50% duty, 1ms P.W.

*2. ≤1Ms P.W, 300pps.

*3. AC FOR 1 MINUTE, r.h.=40~60%.

*4. For 10 seconds.

ELECTRICAL CHARACTERISTICS:

Recommended Operation Conditions:

Parameter	Symbol	Ratings			Unit
		Min.	Typ.	Max.	
Operating Temperature	T_a	-40	---	100	mA
Supply Voltage	V_{CC}	2.7	---	3.6	V
		4.5		5.5	
Low Level Input Current	I_{FL}	0	---	250	μA
High Level Input Current	I_{FH}	5	---	15	mA
Low Level Enable Voltage	V_{EL}	0	---	0.8	V
High Level Enable Voltage	V_{EH}	2	---	V_{CC}	V
Output Pull-up Resistor	R_L	330	---	4k	Ω
Fan Out (At $R_L=1k\Omega$ per channel)	N	---	---	5	TTL Loads

ELECTRICAL CHARACTERISTICS ($V_{CC}=3.3V$):

Electrical Optical Characteristics at $T_a=25^{\circ}C$:

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
INPUT						
Forward Voltage	V _F	---	1.38	1.8	V	I _F =10mA
Reverse Current	I _R	---	---	10	μA	V _R =5V
Input Capacitance	C _{IN}	---	13	---	pF	V=0, f=1MHz
OUTPUT (V _{CC} =3.3V)						
High Level Supply Current	I _{CC} H	---	4.3	10	mA	I _F =0mA, V _E =0.5V V _{CC} =3.3V
Low Level Supply Current	I _{CC} L	---	6.4	13	mA	I _F =10mA V _{CC} =3.3V
High Level Enable Current	I _{EH}	---	-0.21	-1.6	mA	V _E =2.0V V _{CC} =3.3V
Low Level Enable Current	I _{EL}	---	-0.42	-1.6	mA	V _E =0.5V V _{CC} =3.3V
High Level Enable Voltage	V _{EH}	2.0	---	---	V	I _F =10mA V _{CC} =3.3V
Low Level Enable Voltage	V _{EL}	---	---	0.8	V	I _F =10mA V _{CC} =3.3V
TRANSFER CHARACTERISTICS (V _{CC} =3.3V, T _a =-40 to 85°C)						
High Level Output Current	I _{OH}	---	4.1	100	μA	V _{CC} =V _O =3.3V I _F =250μA, V _E =2.0V
Low Level Output Voltage	V _{OL}	---	0.29	0.6	V	V _{CC} =3.3V, I _F =5mA V _E =2V, I _{CL} =13mA
Input Threshold Current	I _{FT}	---	2.2	5	mA	V _{CC} =3.3V, V _O =0.6V V _E =2V, I _{OL} =13mA
Isolation Resistance	R _{iso}	10^12	10^14	---	Ω	DC500V 40~60% R.H.
Floating Capacitance	C _{IO}	---	1.0	---	pF	V=0, f=1MHz



ELECTRICAL CHARACTERISTICS ($V_{CC}=3.3V$):

Electrical Optical Characteristics:

Parameter		Symbol	Values			Unit	Test Condition
			Min.	Typ.	Max.		
SWITCHING CHARACTERISTICS (T _a =-40 to 85°C, V _{CC} =3.3V, I _F =7.5mA unless specified otherwise)							
Propagation Delay Time to Output Low Level		T _{PHL}	---	35	75	ns	C _L =15pF, R _L =350Ω T _a =25°C
Propagation Delay Time to Output High Level		T _{PLH}	---	40	75	ns	C _L =15pF, R _L =350Ω T _a =25°C
Pulse Width Distortion		T _{PHL} -PLH	---	12	35	ns	C _L =15pF, R _L =350Ω
Rise Time		t _r	---	30	---	ns	C _L =15pF, R _L =350Ω
Fall Time		t _f	---	8.5	---	ns	C _L =15pF, R _L =350Ω
Enable Propagation Delay Time to Output Low Level		T _{EHL}	---	15	---	ns	I _F =7.5mA, V _{EH} =3.3V C _L =15pF, R _L =350Ω
Enable Propagation Delay Time to Output High Level		T _{ELH}	---	15	---	ns	I _F =7.5mA, V _{EH} =3.3V C _L =15pF, R _L =350Ω
Common Mode Transient Immunity at Logic High	TD2601	CMH	5000	---	---	V/μs	I _F =7.5mA, V _{OH} =2.0V R _L =350Ω, T _a =25°C V _{CM} =50Vp-p
	TD2611		10000	---	---		I _F =7.5mA, V _{OH} =2.0V R _L =350Ω, T _a =25°C V _{CM} =400Vp-p
Common Mode Transient Immunity at Logic Low	TD2601	CML	5000	---	---	V/μs	I _F =0mA, V _{OH} =0.8V R _L =350Ω, T _a =25°C V _{CM} =50Vp-p
	TD2611		10000	---	---		I _F =0mA, V _{OH} =0.8V R _L =350Ω, T _a =25°C V _{CM} =400Vp-p

ELECTRICAL CHARACTERISTICS ($V_{CC}=5.5V$):

Electrical Optical Characteristics at $T_a=25^{\circ}C$:

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
INPUT						
Forward Voltage	V _F	---	1.38	1.8	V	I _F =10mA
Reverse Current	I _R	---	---	10	μA	V _R =5V
Input Capacitance	C _{IN}	---	13	---	pF	V=0, f=1MHz
OUTPUT (V _{CC} =5.5V)						
High Level Supply Current	I _{CC} H	---	6.3	10	mA	I _F =0mA, V _E =0.5V V _{CC} =5.5V
Low Level Supply Current	I _{CC} L	---	8.3	13	mA	I _F =10mA, V _{CC} =5.5V
High Level Enable Current	I _{EH}	---	-0.52	-1.6	mA	V _E =2.0V V _{CC} =5.5V
Low Level Enable Current	I _{EL}	---	-0.75	-1.6	mA	V _E =0.5V V _{CC} =5.5V
High Level Enable Voltage	V _{EH}	2.0	---	---	V	I _F =10mA V _{CC} =5.5V
Low Level Enable Voltage	V _{EL}	---	---	0.8	V	I _F =10mA V _{CC} =5.5V
TRANSFER CHARACTERISTICS (V _{CC} =5.5V, T _a =-40 to 85°C)						
High Level Output Current	I _{OH}	---	0.73	100	μA	V _{CC} =V _O =5.5V I _F =250μA, V _E =2.0V
Low Level Output Voltage	V _{OL}	---	0.28	0.6	V	V _{CC} =5.5V, I _F =5mA V _E =2V, I _{CL} =13mA
Input Threshold Current	I _{FT}	---	2.5	5	mA	V _{CC} =5.5V, V _O =0.6V V _E =2V, I _{OL} =13mA
Isolation Resistance	R _{iso}	10^12	10^14	---	Ω	DC500V 40~60% R.H.
Floating Capacitance	C _{IO}	---	1.0	---	pF	V=0, f=1MHz



ELECTRICAL CHARACTERISTICS ($V_{CC}=5.5V$):

Electrical Optical Characteristics:


Parameter		Symbol	Values			Unit	Test Condition
			Min.	Typ.	Max.		
SWITCHING CHARACTERISTICS (T _a =-40 to 85°C, V _{CC} =5V, I _F =7.5mA unless specified otherwise)							
Propagation Delay Time to Output Low Level		T _{PHL}	---	35	75	ns	C _L =15pF, R _L =350Ω T _a =25°C
Propagation Delay Time to Output High Level		T _{PLH}	---	40	75	ns	C _L =15pF, R _L =350Ω T _a =25°C
Pulse Width Distortion		T _{PHL} -PLH	---	5	35	ns	C _L =15pF, R _L =350Ω
Rise Time		t _r	---	27	---	ns	C _L =15pF, R _L =350Ω
Fall Time		t _f	---	7	---	ns	C _L =15pF, R _L =350Ω
Enable Propagation Delay Time to Output Low Level		T _{EHL}	---	15	---	ns	I _F =7.5mA, V _{EH} =3.5V C _L =15pF, R _L =350Ω
Enable Propagation Delay Time to Output High Level		T _{ELH}	---	15	---	ns	I _F =7.5mA, V _{EH} =3.5V C _L =15pF, R _L =350Ω
Common Mode Transient Immunity at Logic High	TD2601	CMH	5000	---	---	V/μs	I _F =7.5mA, V _{OH} =2.0V R _L =350Ω, T _a =25°C V _{CM} =50Vp-p
	TD2611		10000	---	---		I _F =7.5mA, V _{OH} =2.0V R _L =350Ω, T _a =25°C V _{CM} =400Vp-p
Common Mode Transient Immunity at Logic Low	TD2601	CML	5000	---	---	V/μs	I _F =0mA, V _{OH} =0.8V R _L =350Ω, T _a =25°C V _{CM} =50Vp-p
	TD2611		10000	---	---		I _F =0mA, V _{OH} =0.8V R _L =350Ω, T _a =25°C V _{CM} =400Vp-p

CHARACTERISTIC CURVES:



Forward Current v.s. Forward Voltage

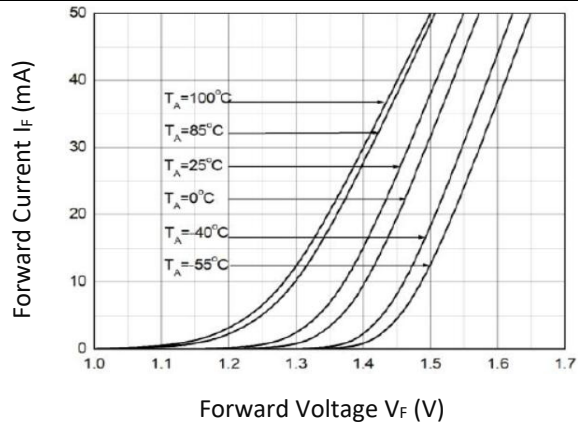



Forward Voltage v.s. Ambient Temperature

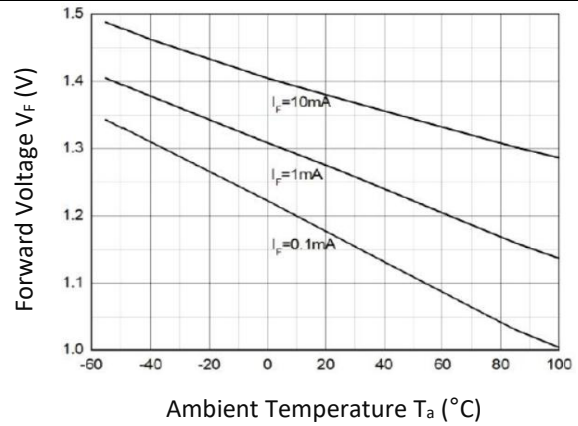

Input Threshold Current v.s. Ambient Temperature

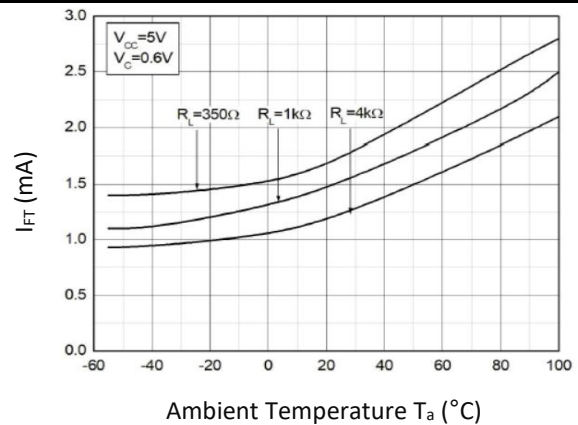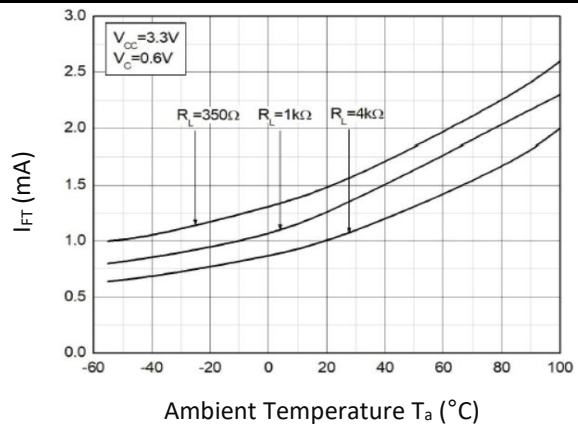



Low Level Output Current v.s. Ambient Temperature

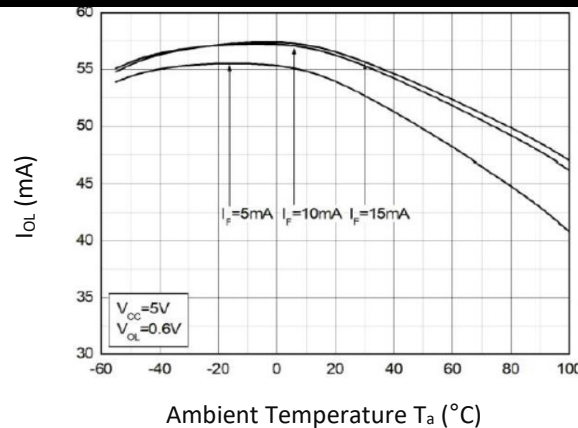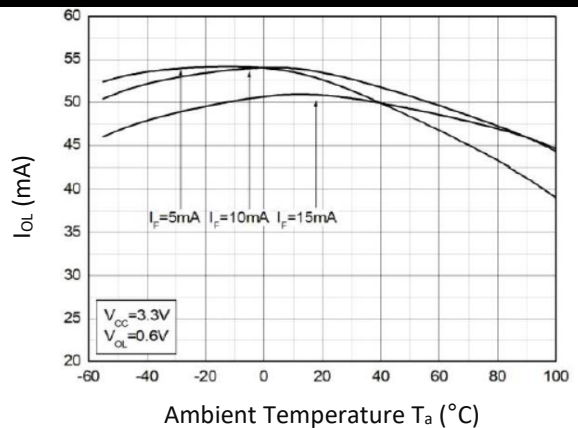





CHARACTERISTIC CURVES:



Low Level Output Voltage v.s. Ambient Temperature

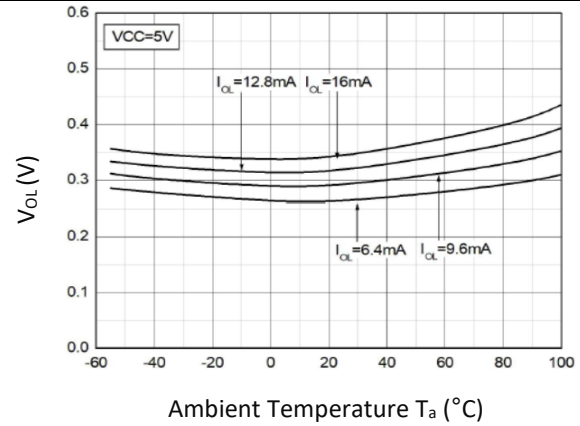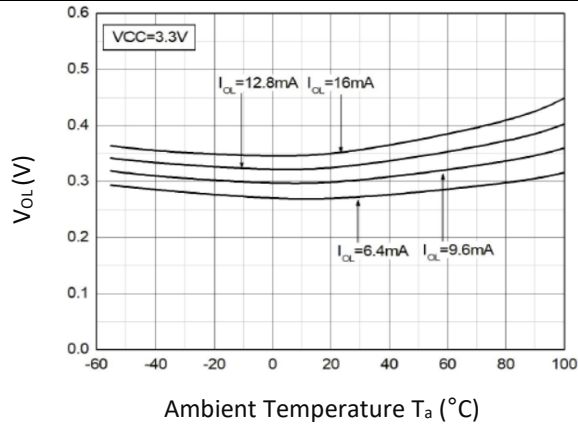

High Level Output Current v.s. Ambient Temperature

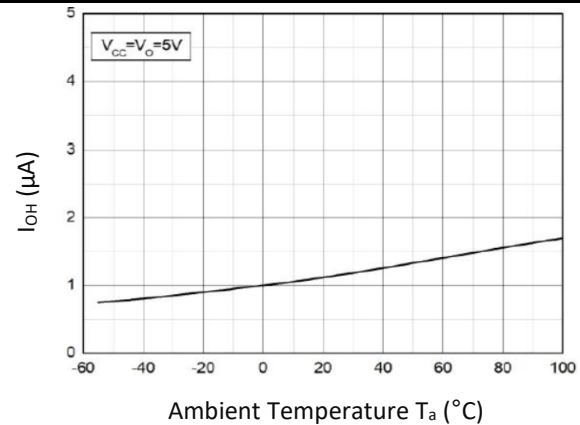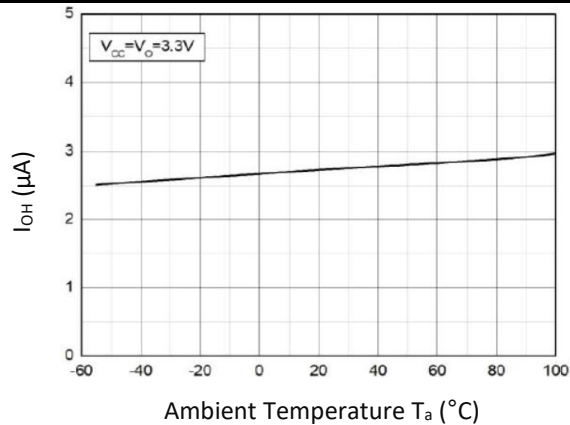



Output Voltage v.s. Forward Current

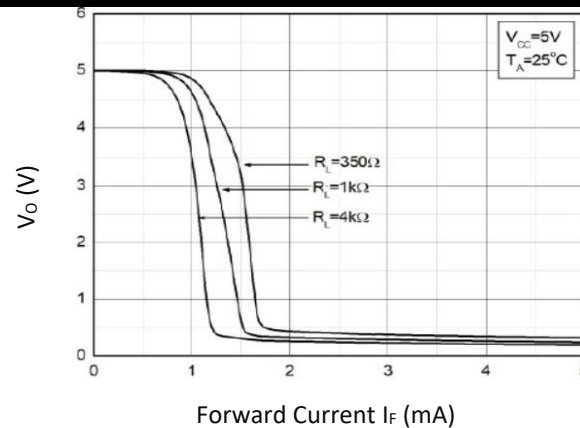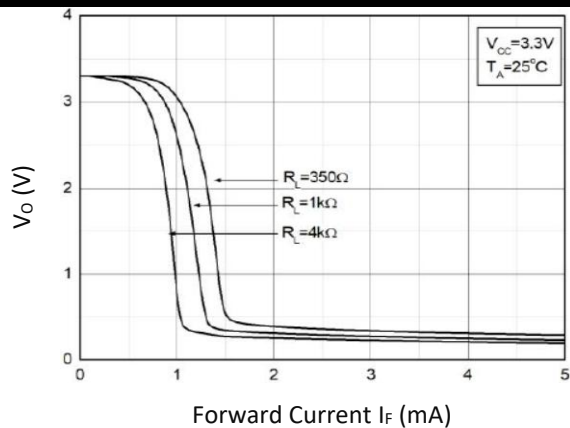





CHARACTERISTIC CURVES:



Propagation Delay v.s. Forward Current

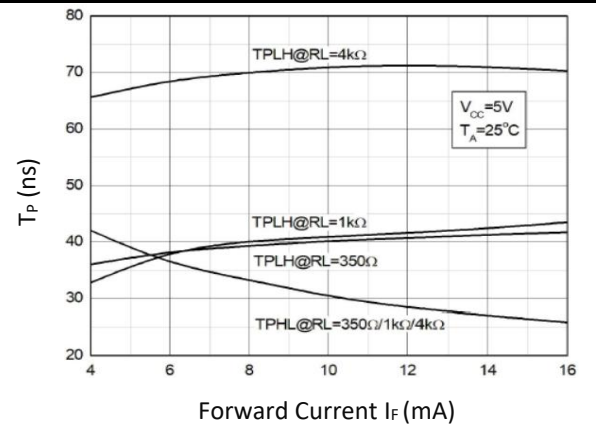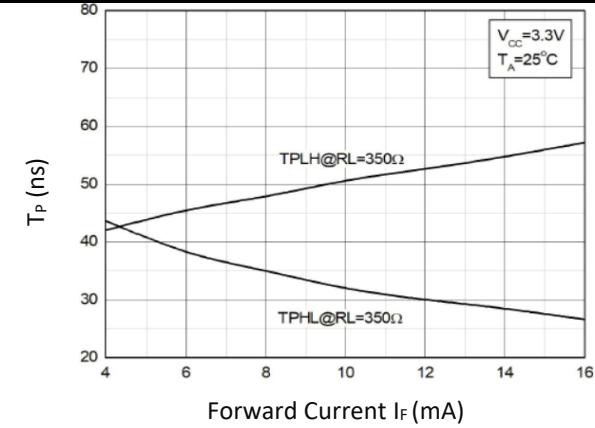

Rise and Fall Time v.s. Ambient Temperature

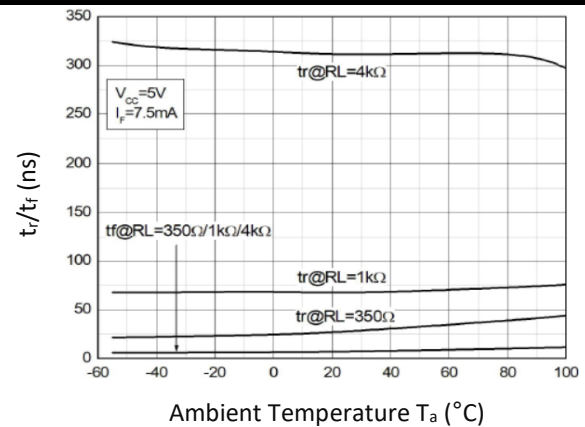
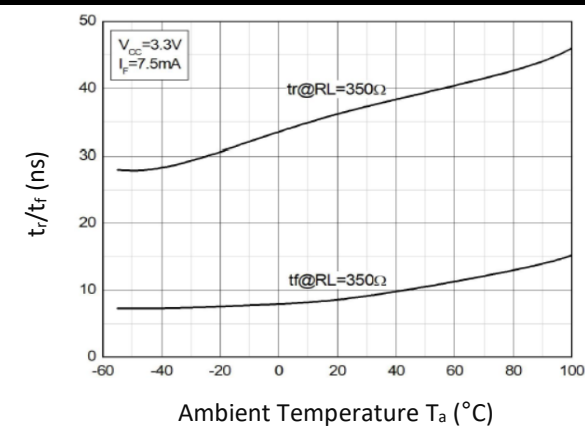


Propagation Delay v.s. Ambient Temperature

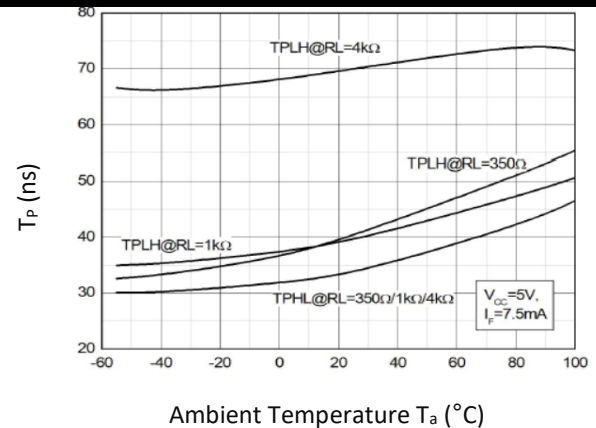
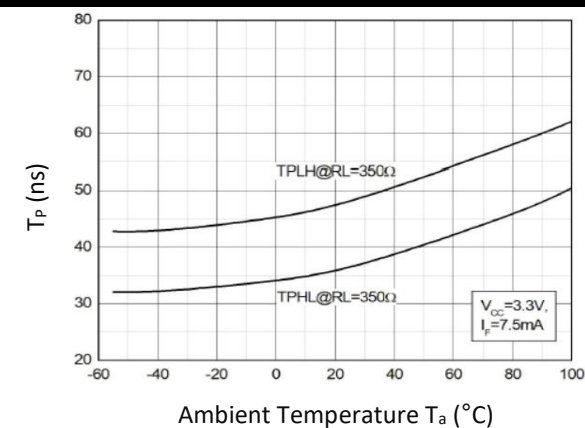


CHARACTERISTIC CURVES:

Pulse Width Distortion v.s. Ambient Temperature

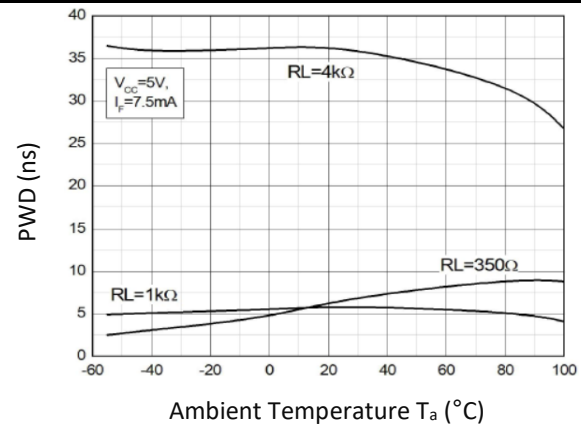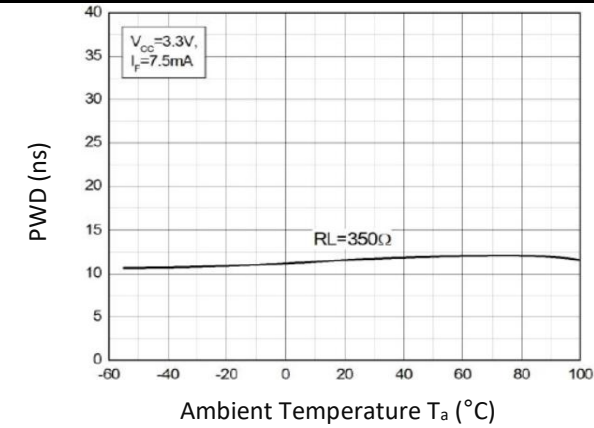


Enable Propagation Delay v.s. Ambient Temperature

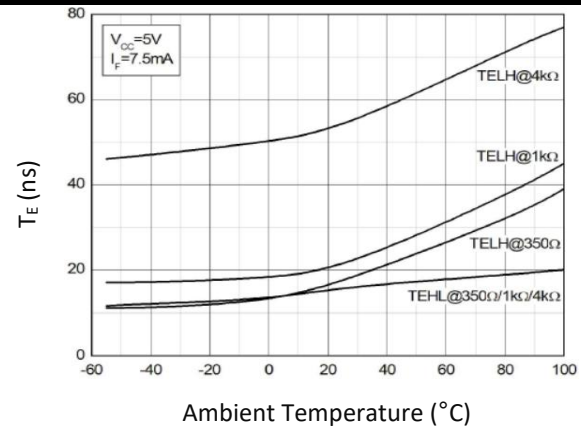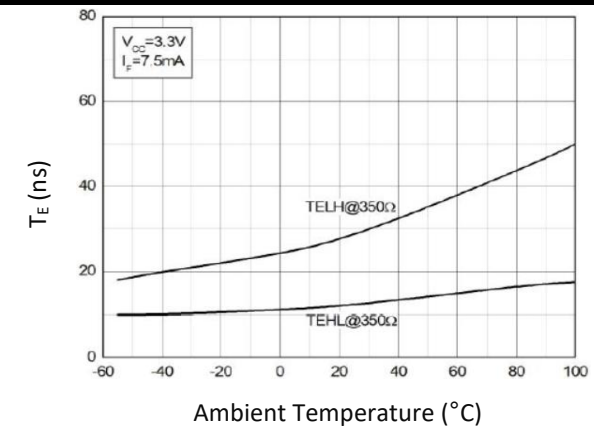


TEST CIRCUIT:


Test Circuit and Waveforms for TPHL, TPLH, tr, tf:

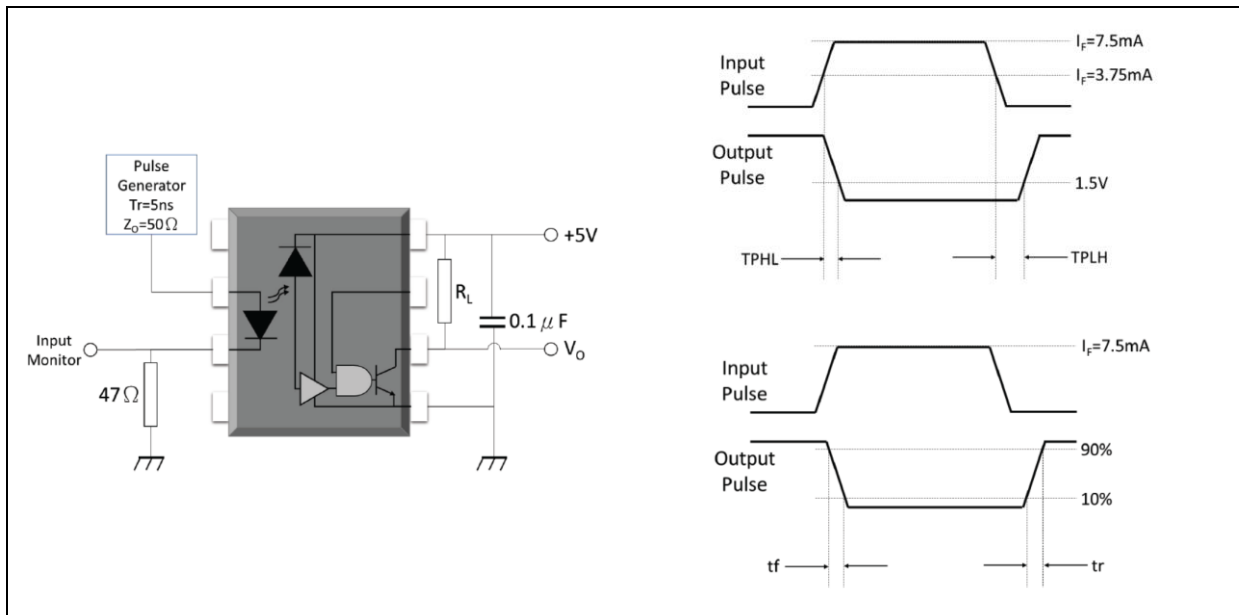

Test Circuit and Waveforms for TEHL, TELH:

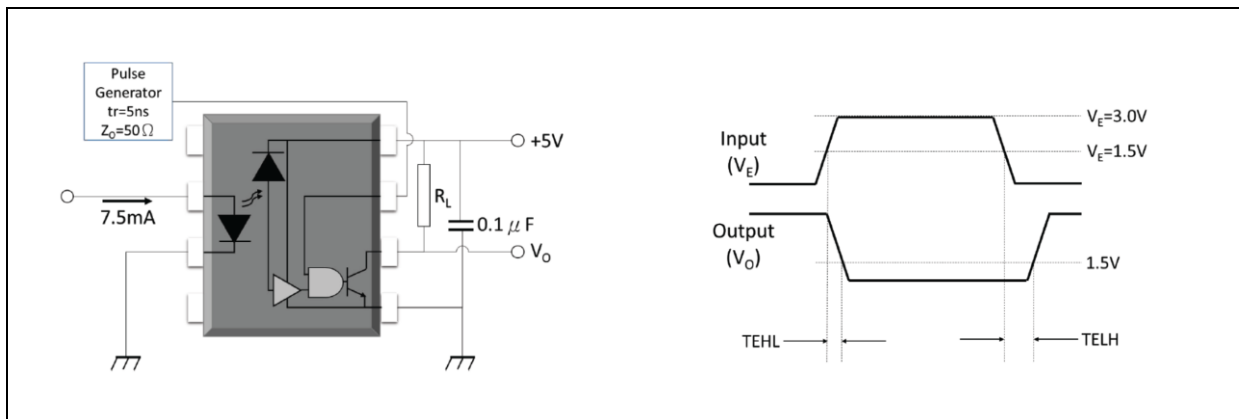


Test Circuit and Waveforms for Common Mode Transient Immunity:

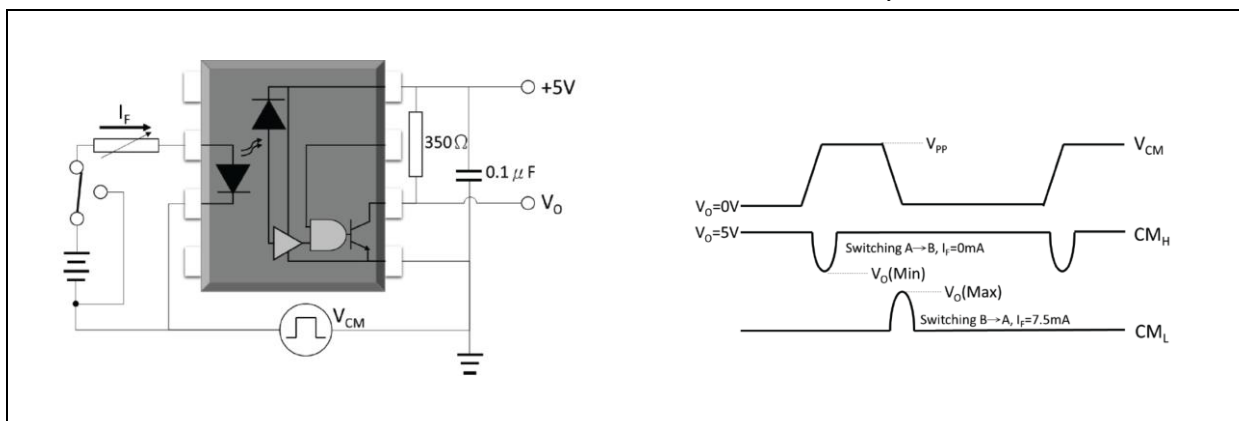


OUTLINE DIMENSION:

Package Dimension:

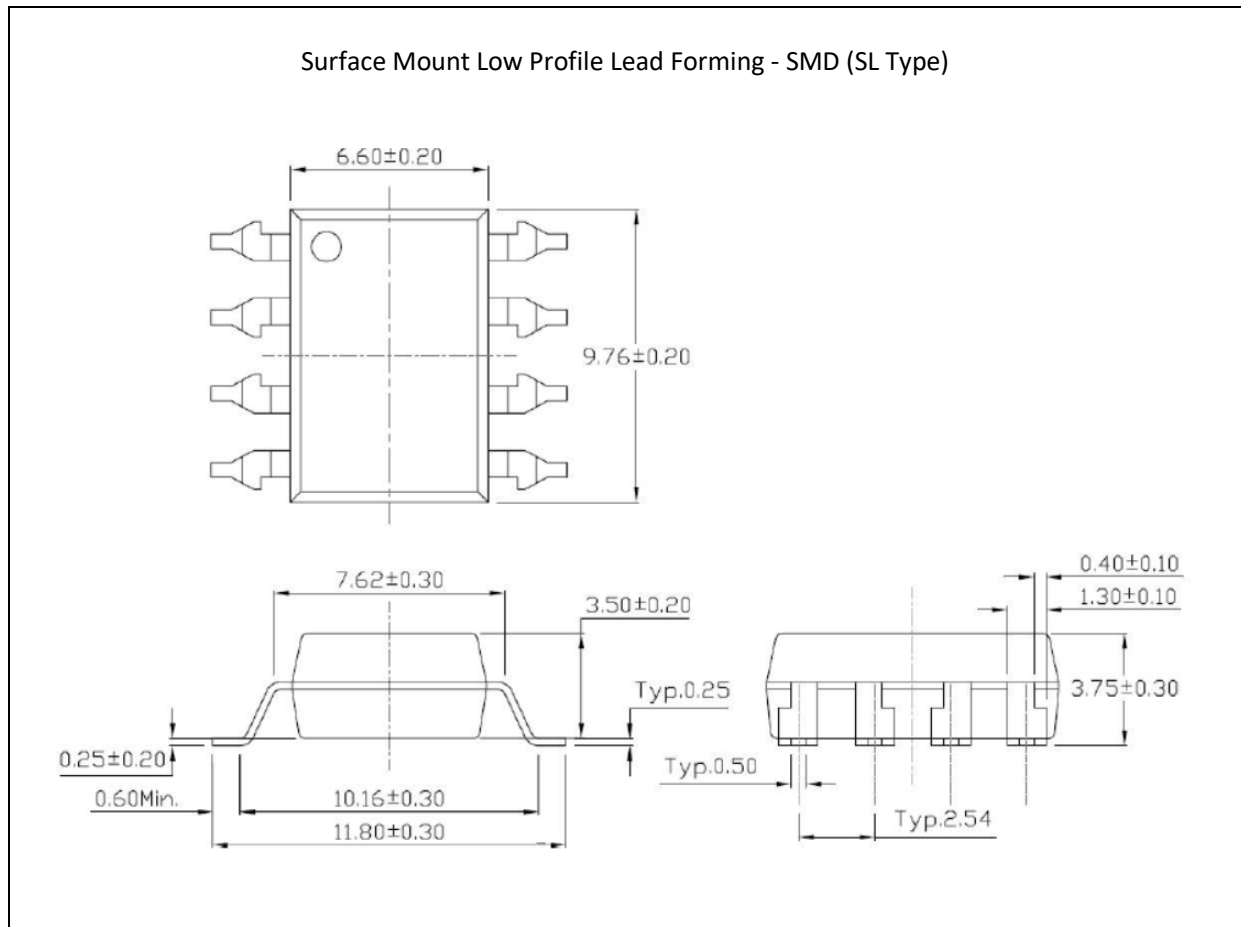

1. All dimensions are in millimetre (mm).


Recommended Soldering Mask:

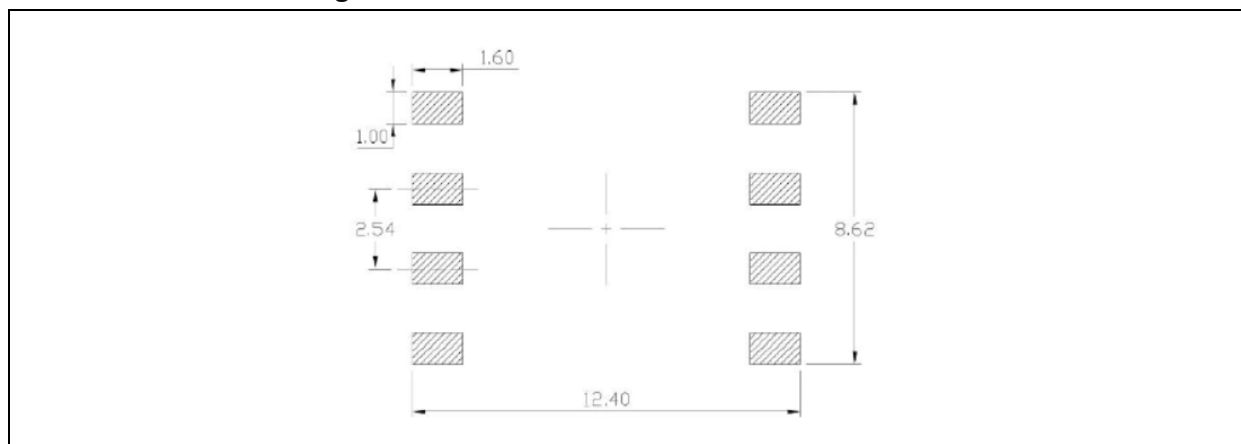

1. Dimensions are in millimetre (mm).

PACKING SPECIFICATION:

Reel Dimension:

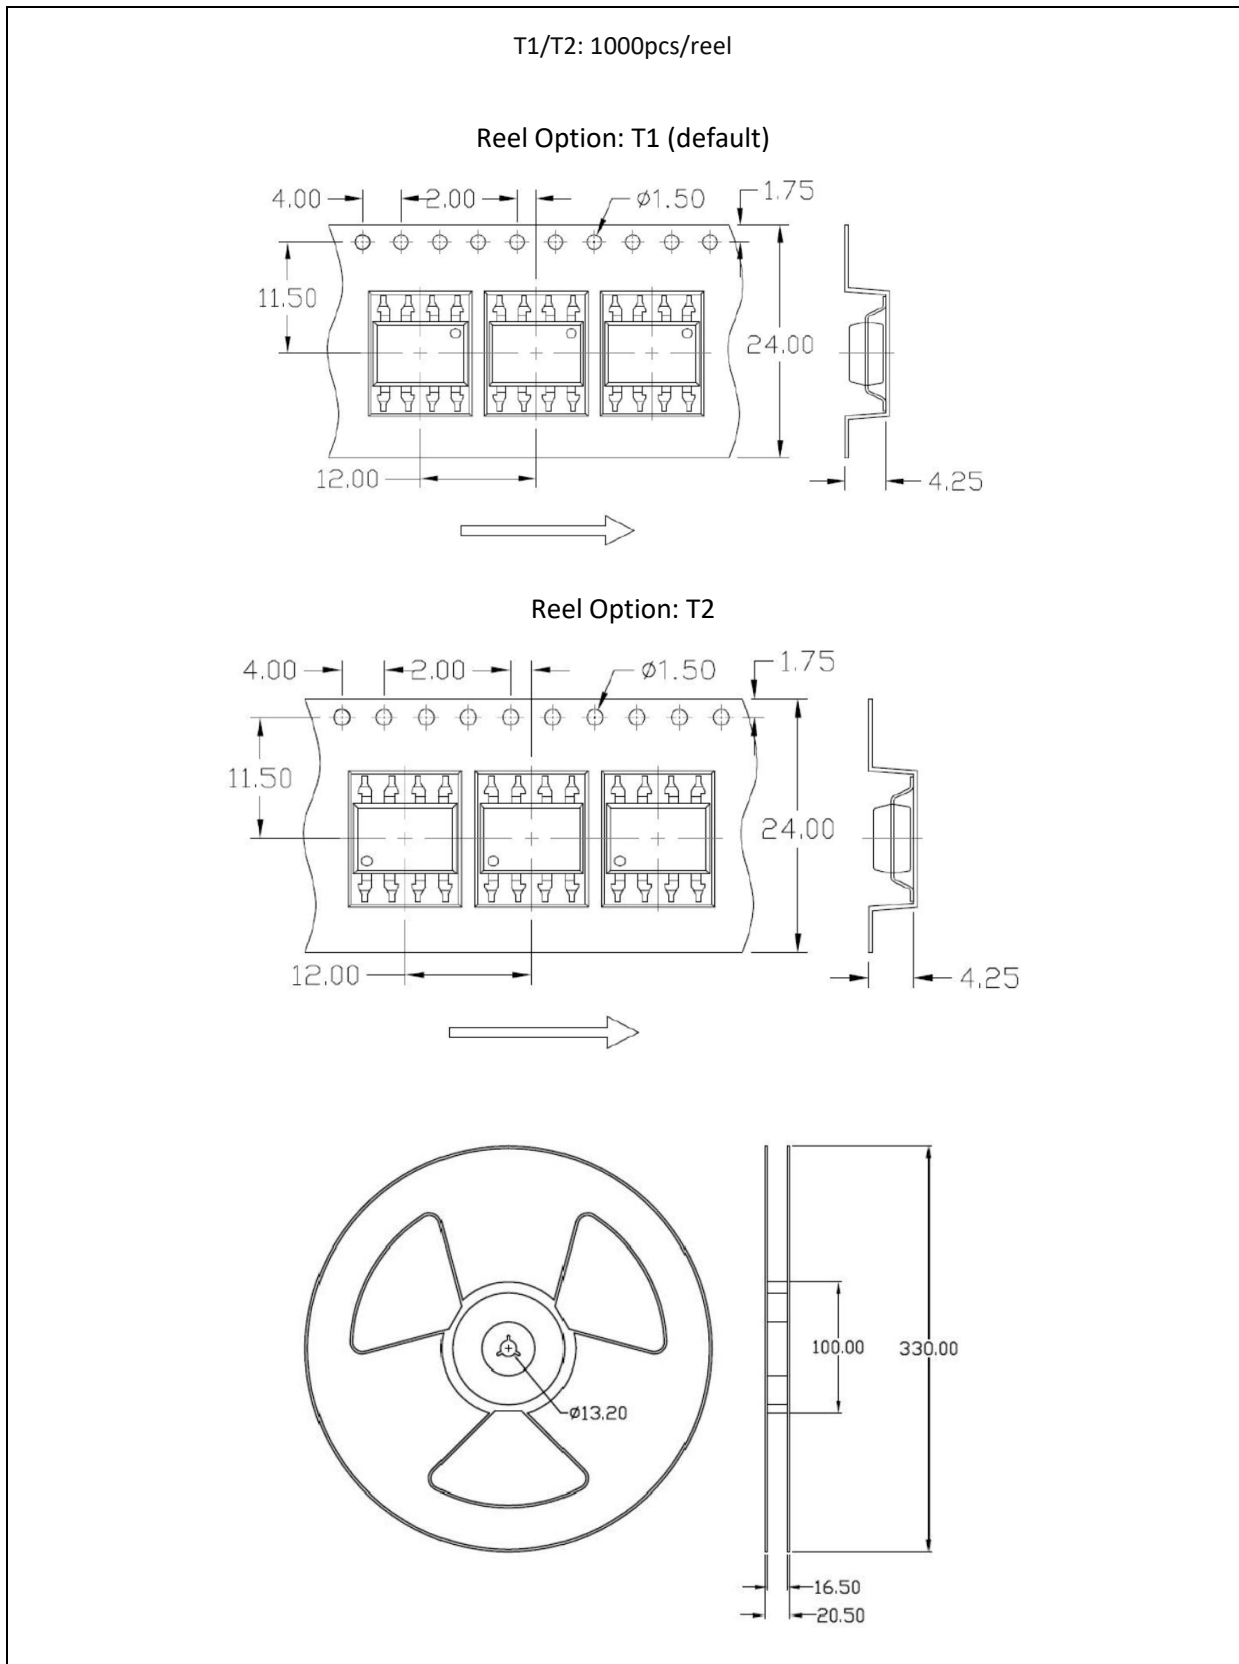


Box Dimension:


T1/T2: 3 reels (3Kpcs)/inner box, 5 inner boxes (15Kpcs)/carton



- L x W x H = 36cm x 36cm x 6.9cm

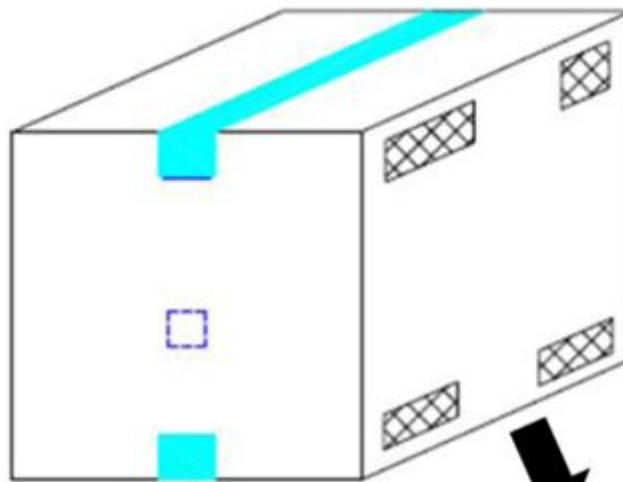


- L x W x H = 45cm x 38cm x 38cm

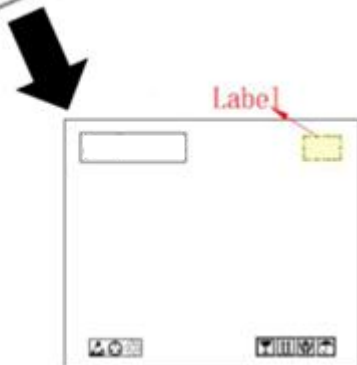



RECOMMENDED SOLDERING PROFILE:

Reflow Information:

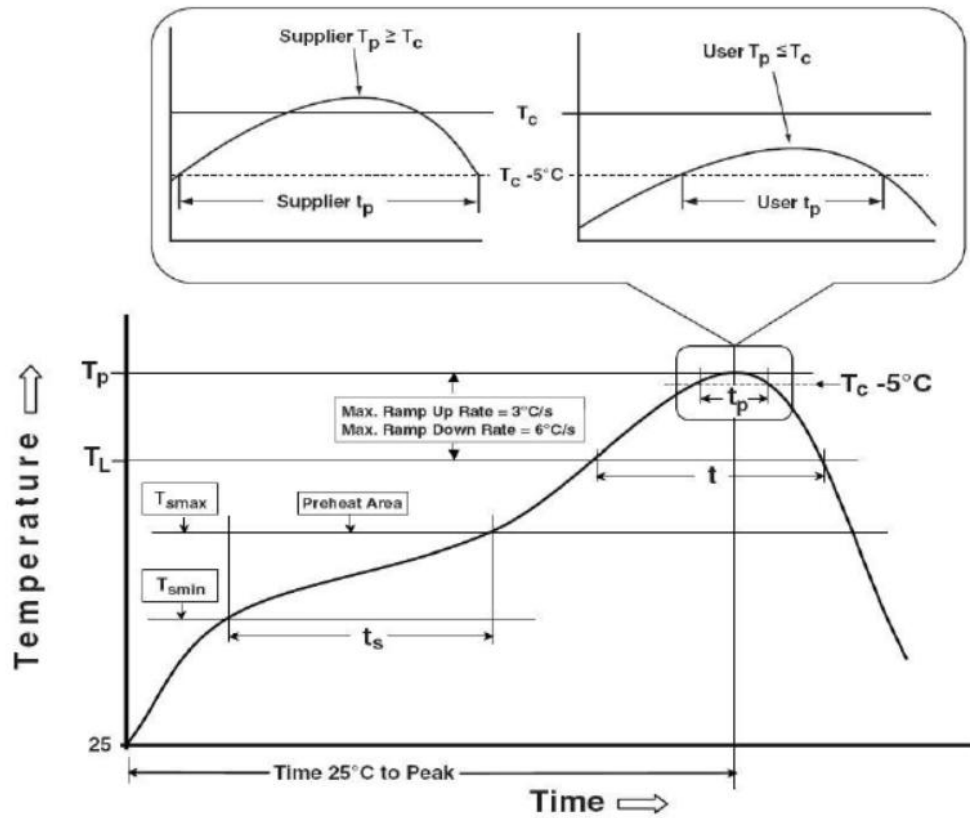

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T_{smin})	100°C	150°C
Temperature Max. (T_{smax})	150°C	200°C
Time (t_s) from (T_{smin} to T_{smax})	60-120 seconds	60-120 seconds
Ramp-up Rate (t_L to t_P)	3°C/second max.	3°C/second max.
Liquidous Temperature (T_L)	183°C	217°C
Time (t_L) Maintained Above (T_L)	60-150 seconds	60-150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (t_P) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (T_P to T_L)	6°C/second max.	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.