



**BRIGHTTEK**  
**BRIGHTTEK (EUROPE) LIMITED**

*Brighten up The World With LED!*



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

## PRODUCT DATASHEET



- ▶ PTH/THT Lamp
- ▶ 8mm Round 11.0t
- ▶ Red/Green/Blue

NOM59L90



Release Date: 13 December 2023 Version: A1.1



### APPLICATIONS:

- Indicator
- Signal
- 3C Application

## 8mm Round Lamp

**RoHS**  
Compliant



### FEATURES:

- **Package:** PTH/THT LED Lamp 8mm Round 11.0t
- **Forward Current:** 20/20/20mA \*
- **Forward Voltage (typ.):** 2.0/3.3/3.2V
- **Luminous Intensity (typ.):** 1500/4500/800mcd@20mA
- **Colour:** Red/Green/Blue
- **Dominant Wavelength (typ.):** 625/525/467nm
- **Viewing Angle:** 60°
- **Materials:**
  - Die: AlInGaP/InGaN/InGaN
  - Resin: Epoxy (White Diffused)
- **Operating Temperature:** -40~+85°C
- **Storage Temperature:** -40~+100°C
- **Grouping Parameters:**
  - Forward voltage
  - Luminous intensity
  - Dominant wavelength
- **Soldering Methods:** Hand; Soldering Heat (DIP)
- **Packing:** max.500pcs/bulk

\* in the order of Red/Green/Blue

## CHARACTERISTICS:

### Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Forward Current	I <sub>F</sub>	25/30/30 *	mA
Peak Forward Current Duty 1/10@1KHz	I <sub>FP</sub>	100	mA
Reverse Current @5V	I <sub>R</sub>	10	μA
Reverse Voltage	V <sub>R</sub>	5	V
Power Dissipation	PD	90/80/80	mW
Electrostatic Discharge	ESD	200	V
Operating Temperature	T <sub>OPR</sub>	-40~+85	°C
Storage Temperature	T <sub>STG</sub>	-40~+100	°C

\* in the order of Red/Green/Blue


### Electrical & Optical Characteristics (Ta=25°C)

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V <sub>F</sub>	1.8/2.9/2.8*	2.0/3.3/3.2	2.6/3.6/3.6	V	I <sub>F</sub> =20mA
Luminous Intensity	I <sub>v</sub>	1000/2500/450	1500/4500/800	---	mcd	I <sub>F</sub> =20mA
Dominant Wavelength	λ <sub>D</sub>	620/517/465	625/525/467	630/530/470	nm	I <sub>F</sub> =20mA
Peak Wavelength	λ <sub>P</sub>	---	635/525/468	---	nm	I <sub>F</sub> =20mA
Spectral Line Half Bandwidth	Δλ	---	20/40/25	---	nm	I <sub>F</sub> =20mA
Viewing Angle	2θ <sub>1/2</sub>	---	60	---	deg	I <sub>F</sub> =20mA

- Luminous intensity (I<sub>v</sub>) ±15%, Forward Voltage (V<sub>F</sub>) ±0.1V, Viewing angle(2θ<sub>1/2</sub>) ±5%
- \* in the order of Red/Green/Blue

## OUTLINE DIMENSION:


Package Dimension:

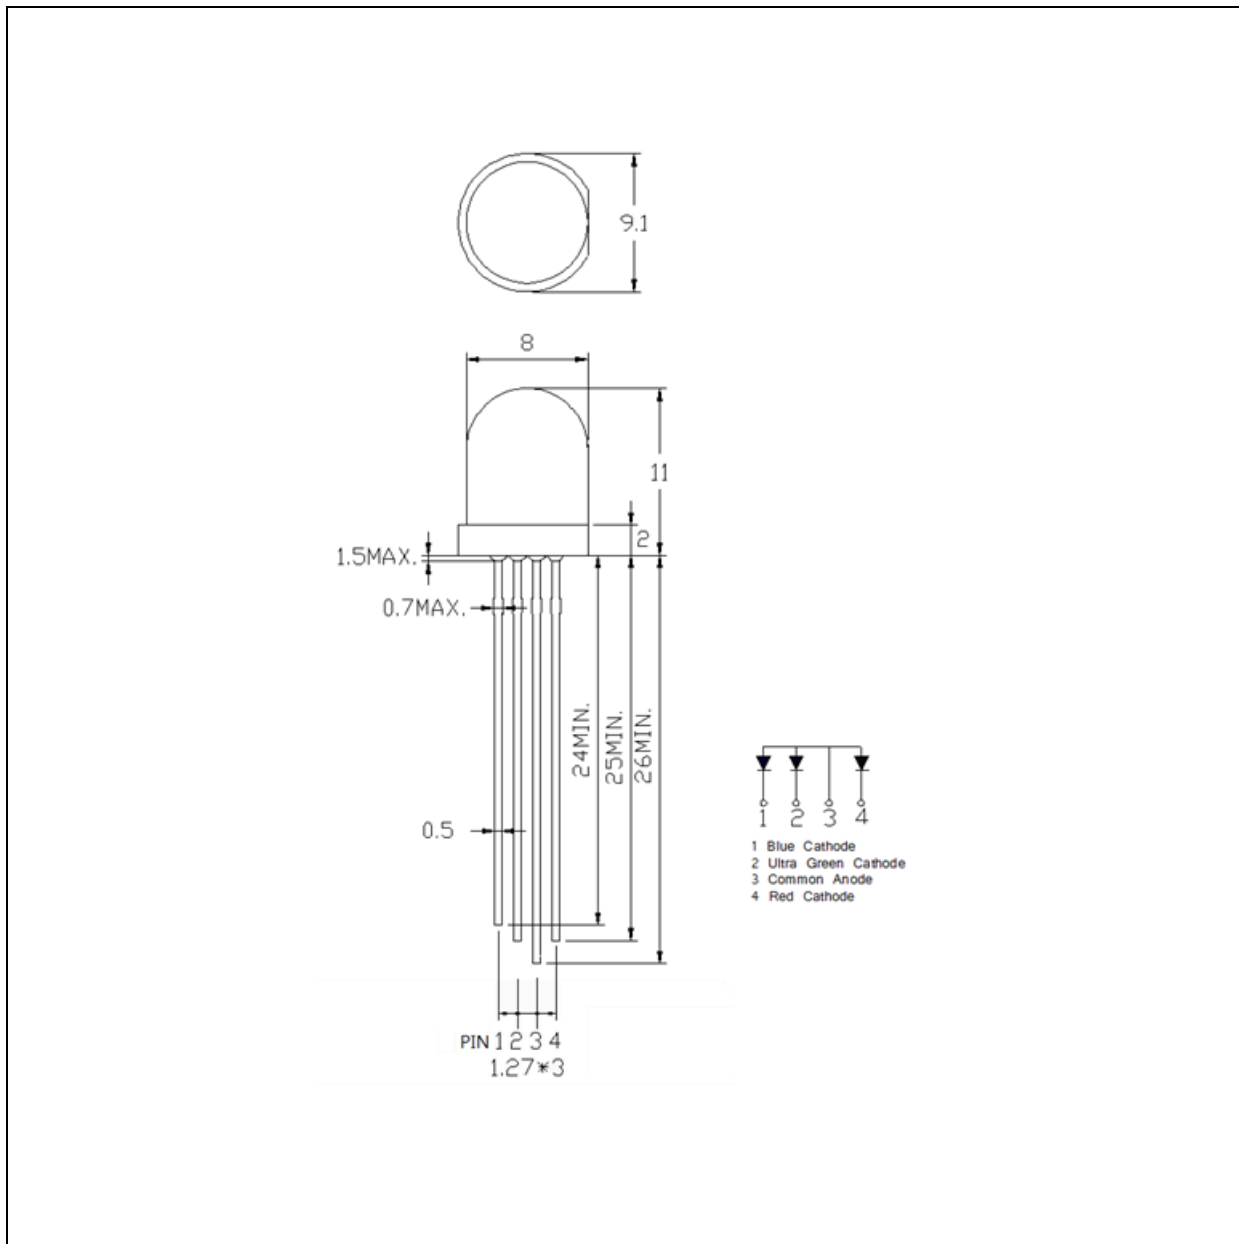


1. All dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.2$ mm, unless otherwise noted.

## ELECTRO-OPTICAL CHARACTERISTICS (RED):


Relative Intensity v.s. Forward Current

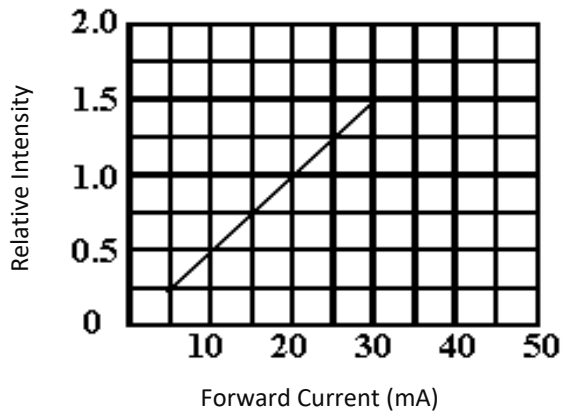


Forward Current v.s. Forward Voltage

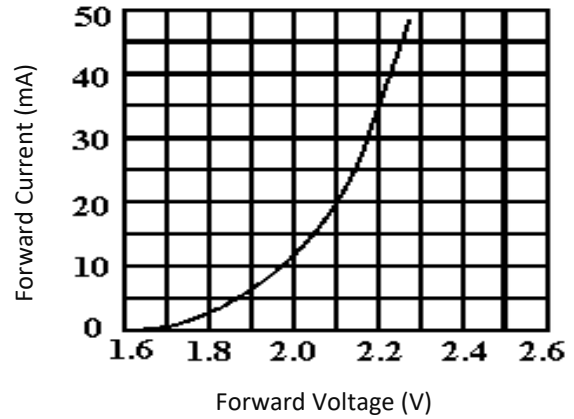

Relative Intensity v.s. Temperature

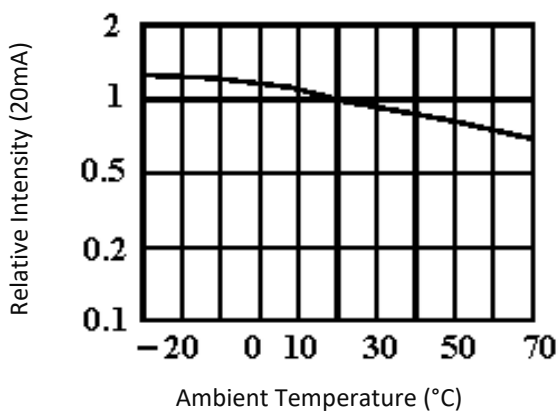


Forward Current v.s. Temperature

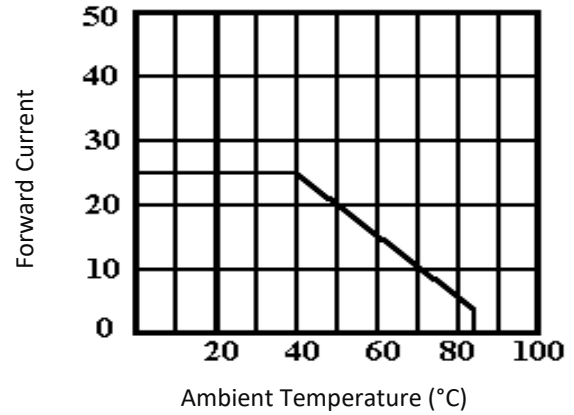


## ELECTRO-OPTICAL CHARACTERISTICS (GREEN):


Relative Intensity v.s. Forward Current

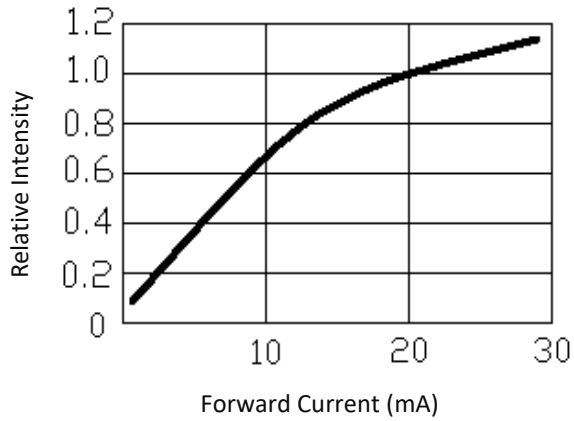


Forward Current v.s. Forward Voltage

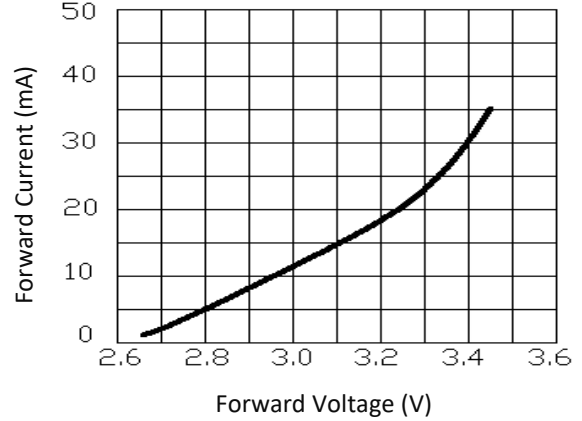

Relative Intensity v.s. Temperature

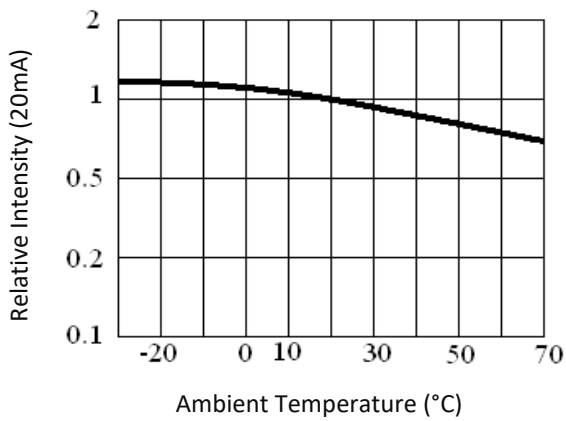


Forward Current v.s. Temperature

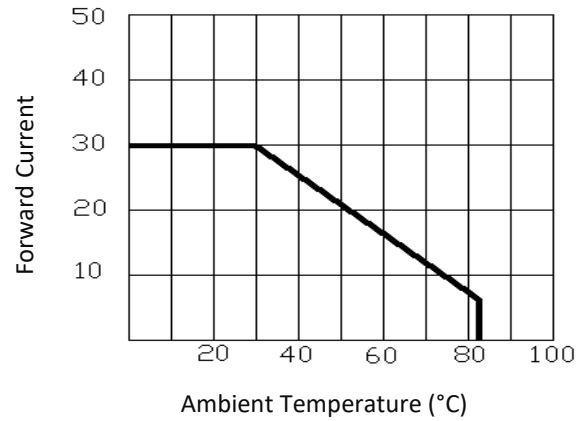


## ELECTRO-OPTICAL CHARACTERISTICS (BLUE):


Relative Intensity v.s. Forward Current

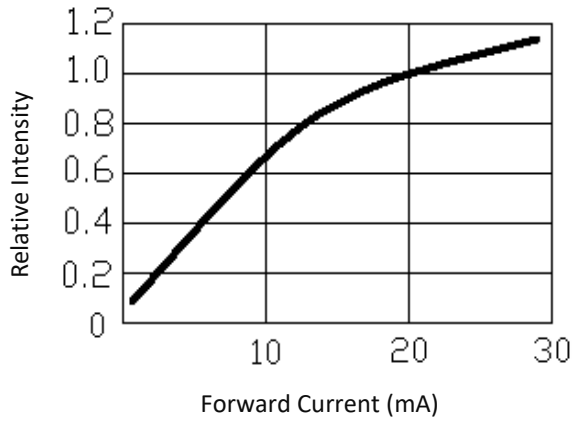


Forward Current v.s. Forward Voltage

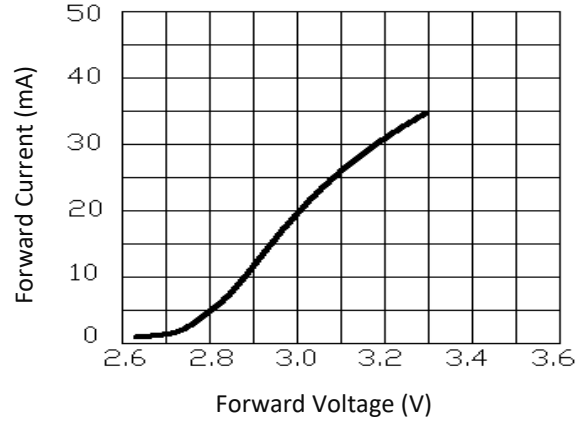

Relative Intensity v.s. Temperature

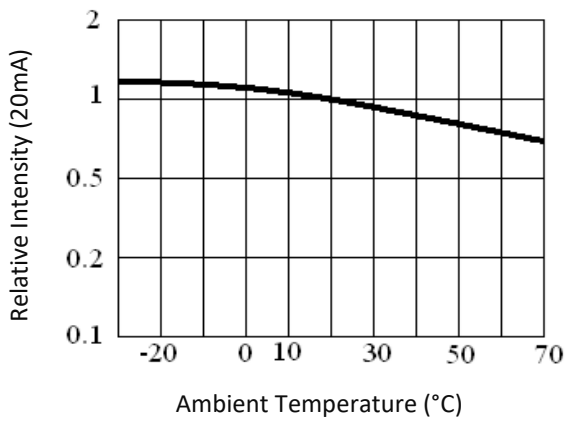

Forward Current v.s. Temperature

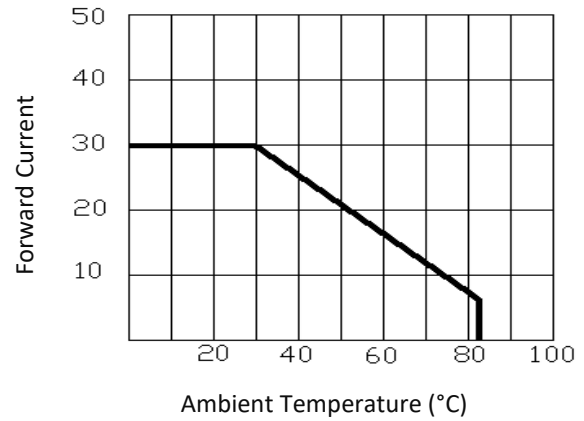


## RECOMMENDED SOLDERING PROFILE:

---

### Hand Solder (Solder Iron):

- Temperature at tip of iron: 350°C Max.
- Soldering Time: 3 seconds  $\pm$  1 sec.

### Soldering Heat (DIP):

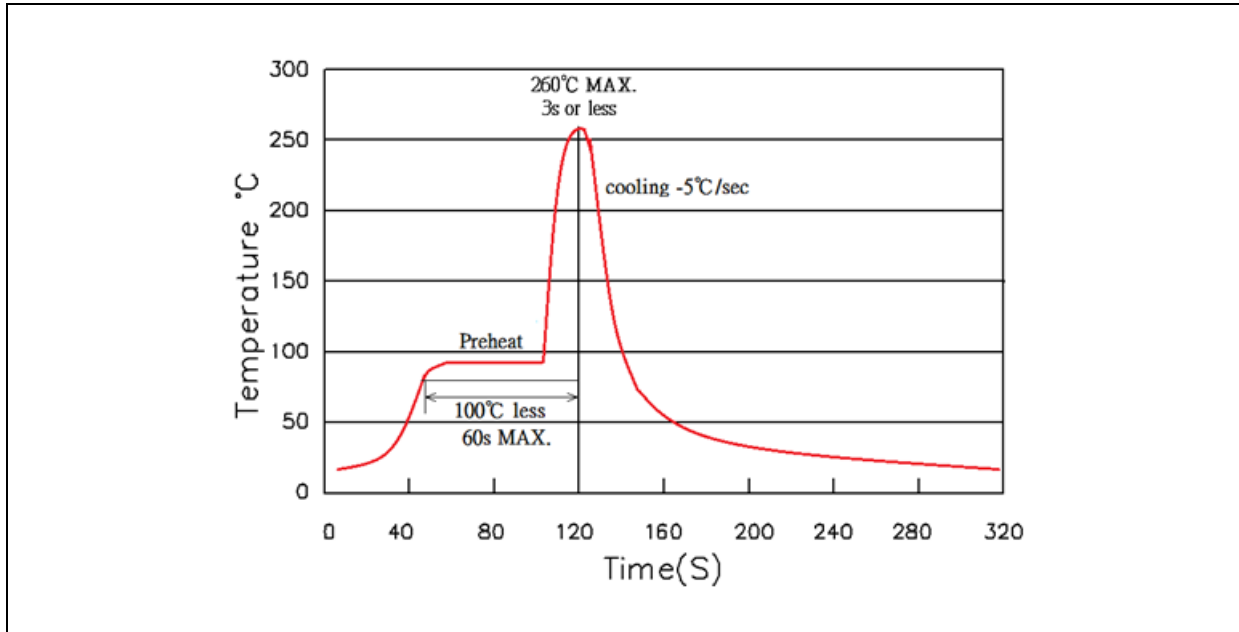

### Note:


1. Maximum reflow soldering: 1 time.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.

**PACKING SPECIFICATION:**

---

Reel Dimension:

Max.500pcs/Bulk

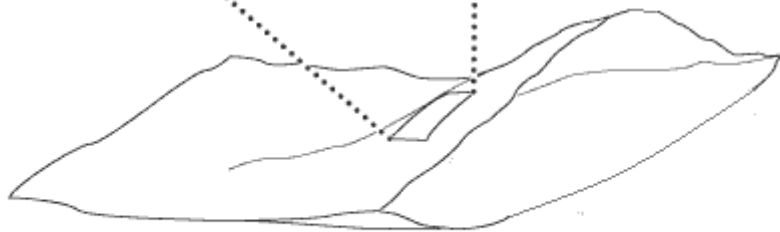



## PRECAUTIONS OF USE:

---

### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a year. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking before use.

### Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±5°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

### Testing Circuit:



Must apply resistor(s) for protection (over current proof).

### Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

**REVISION RECORD:**

---

Version	Date	Summary of Revision
A1.0	06/04/2023	Datasheet set-up.
A1.1	13/12/2023	Revise storage condition.