



BRIGHTTEK

BRIGHTTEK (EUROPE) LIMITED

Brighten up The World With LED!



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

PRODUCT DATASHEET



- ▶ Ceramic SMD
- ▶ 3535 2.30t
- ▶ Cool White 6500K

NOW62S81



Release Date: 02 April 2025 Version: A1.1



3535 Ceramic Series

3535 Ceramic Series



FEATURES:

- **Package:** Top View Ceramic Package
- **Forward Current:** 350~1000mA
- **Forward Voltage (typ.):** 3.0V
- **Luminous Flux (typ.):** 160lm@350mA
- **Colour:** Cool White
- **Colour Temperature (typ.):** 6500K
- **Viewing Angle:** 120°
- **Materials:**
 - Die: InGaN
 - Resin: Silicon (Yellow Diffused)
 - Package: Ceramic
- **Operating Temperature:** -40~+105°C
- **Storage Temperature:** -40~+85°C
- **Electrostatics Discharge (HBM):** 1000V
- **Grouping Parameters:**
 - Forward Voltage
 - Luminous Flux
 - CIE Chromaticity
- **Soldering Methods:** Reflow Soldering
- **MSL Level:** according to J-STD020 MSL 3
- **Packing:** 12mm tape with max.900/reel, ø165mm (6.5")

APPLICATIONS:

- General Lighting
- Portable Lighting
- Commercial Lighting
- Indoor Lighting
- Architecture Lighting
- High Bay Light

CHARACTERISTICS:

Absolute Maximum Characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Ratings	Unit
DC Forward Current	I_F	1000	mA
Pulse Forward Current (Duty 1/10, width $\leq 100\mu\text{S}$)	I_{PF}	1500	mA
Power Dissipation	P_D	3400	mW
Reverse Voltage	V_R	5	V
Reverse Current @10V	I_R	10	μA
Junction Temperature	T_j	125	$^{\circ}\text{C}$
Electrostatic Discharge (HBM)	ESD	1000	V
Thermal Resistance (Junction to Solder Point)	$R_{th(j-sp)}$	5	$^{\circ}\text{C}/\text{W}$
Operating Temperature	T_{OPR}	$-40^{\circ}\sim +105^{\circ}$	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	$-40^{\circ}\sim +85^{\circ}$	$^{\circ}\text{C}$
Soldering Temperature	T_{SOL}	230/260 for 10S	$^{\circ}\text{C}$
Colour Rendering Index	CRI	min. 80 typ. 82	---

1. $R_{th(j-sp)}$ is the thermal resistance from LED junction to solder point on MCPCB with electrical power.

CHARACTERISTICS:

Electrical & Optical Characteristics ($T_a=25^{\circ}\text{C}$)


Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	V_F	2.6	3.0	3.4	V	$I_F=350\text{mA}$
Luminous Flux ($T_j=25^{\circ}\text{C}$)	Φ_V	148	160	---	lm	$I_F=350\text{mA}$
		---	312	---		$I_F=700\text{mA}$
Luminous Flux ($T_j=85^{\circ}\text{C}$)	Φ_V	---	150	---	lm	$I_F=350\text{mA}$
		---	279	---		$I_F=700\text{mA}$
Chromaticity Coordinates	X	0.2937	---	0.3231	---	$I_F=350\text{mA}$
	Y	0.2937	---	0.3602		
Colour Temperature	CCT	---	6500	---	K	$I_F=350\text{mA}$
Viewing Angle	$2\theta_{1/2}$	---	120	---	deg	$I_F=350\text{mA}$

1. Luminous flux (Φ_V) $\pm 10\%$, Forward Voltage (V_F) $\pm 0.1\text{V}$, CRI ± 2




OUTLINE DIMENSION:

Package Dimension:

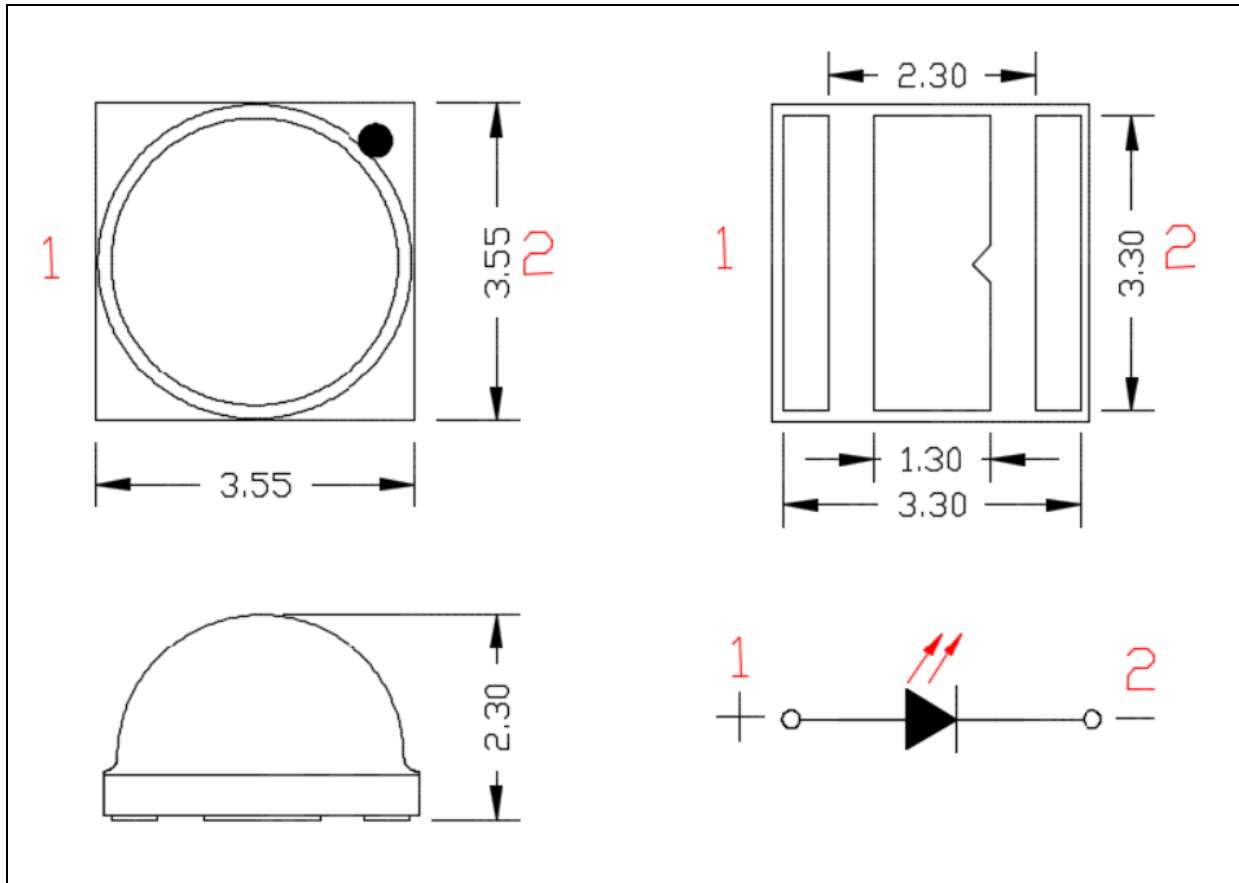

Recommended Soldering Pad Dimension:

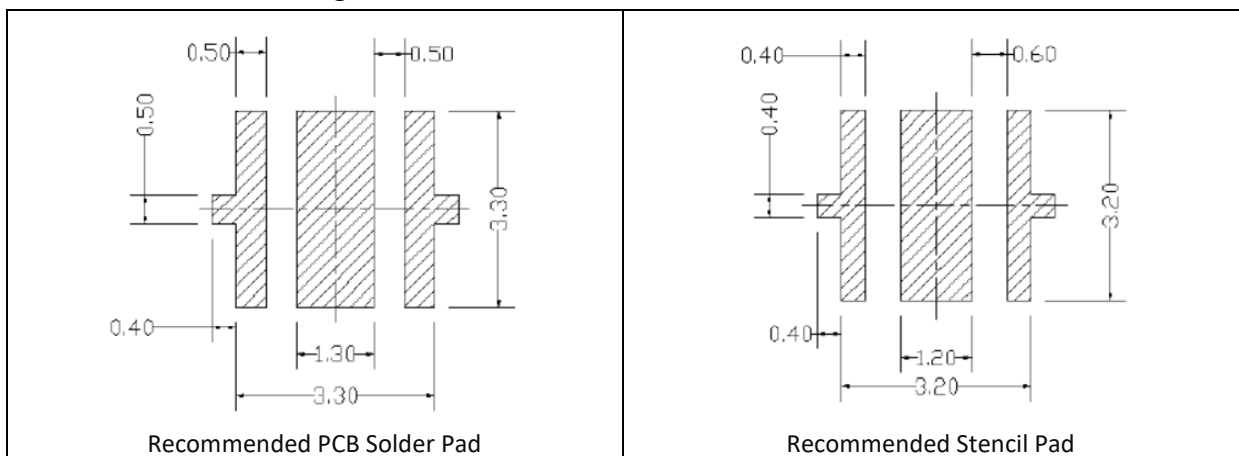

BINNING GROUPS:


Forward Voltage Classifications ($I_F = 350\text{mA}$):

Code	Min.	Max.	Unit
G3	2.6	2.8	V
H3	2.8	3.0	
J3	3.0	3.2	
K3	3.2	3.4	

Luminous Flux Classifications ($I_F = 350\text{mA}$):

Code	Min.	Max.	Unit
2H	148	156	lm
2J	156	164	
2K	164	172	
2L	172	182	
2M	182	200	

CIE CHROMATICITY DIAGRAM:

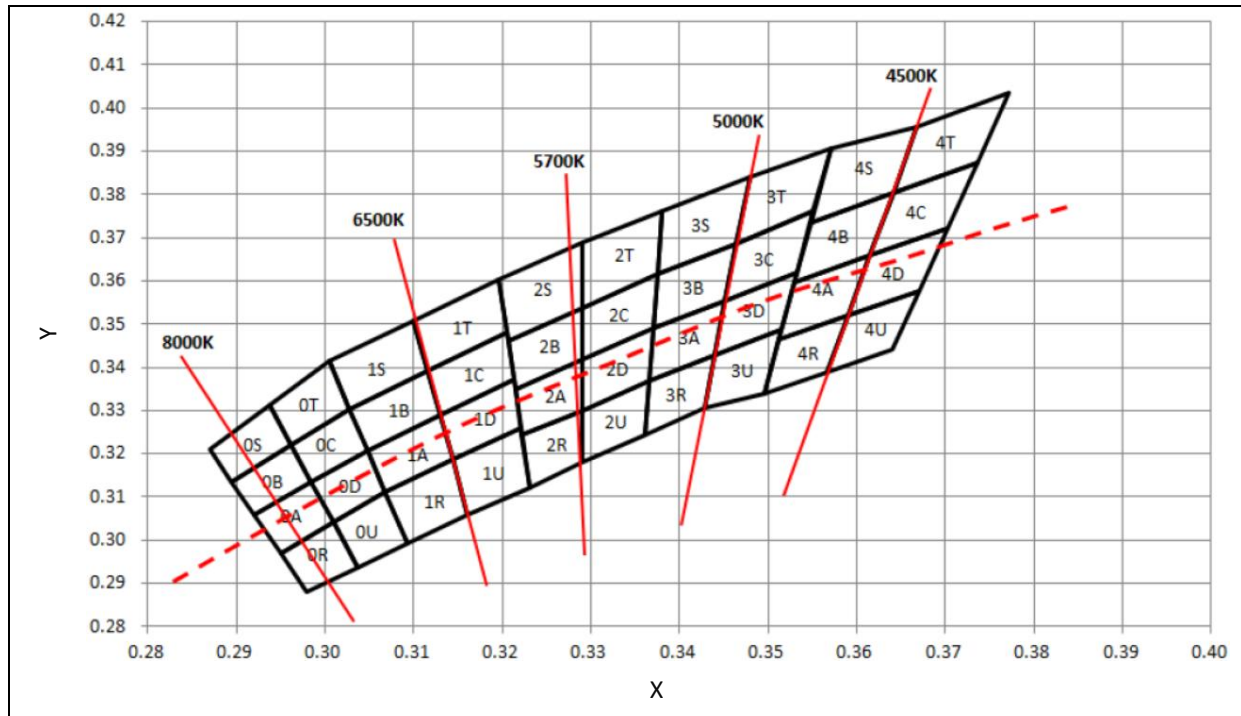


Chromaticity Coordinates Classifications ($I_F = 350\text{mA}$):


	1		2		3		4	
	X	Y	X	Y	X	Y	X	Y
0T	0.2962	0.3220	0.2937	0.3312	0.3005	0.3415	0.3028	0.3304
0C	0.2984	0.3133	0.2962	0.3220	0.3028	0.3304	0.3048	0.3207
0D	0.2984	0.3133	0.3048	0.3207	0.3068	0.3113	0.3009	0.3042
0U	0.3037	0.2937	0.3009	0.3042	0.3068	0.3113	0.3093	0.2993
1S	0.3005	0.3415	0.3099	0.3509	0.3115	0.3391	0.3028	0.3304
1B	0.3028	0.3304	0.3115	0.3391	0.3130	0.3290	0.3048	0.3207
1A	0.3048	0.3207	0.3130	0.3290	0.3144	0.3186	0.3068	0.3113
1R	0.3068	0.3113	0.3144	0.3186	0.3161	0.3059	0.3093	0.2993
1T	0.3099	0.3509	0.3196	0.3602	0.3205	0.3481	0.3115	0.3391
1C	0.3115	0.3391	0.3205	0.3481	0.3213	0.3373	0.3130	0.3290
1D	0.3130	0.3290	0.3213	0.3373	0.3221	0.3261	0.3144	0.3186
1U	0.3144	0.3186	0.3221	0.3261	0.3231	0.3120	0.3161	0.3059

ELECTRO-OPTICAL CHARACTERISTICS:


Relative Luminous Flux v.s. Forward Current

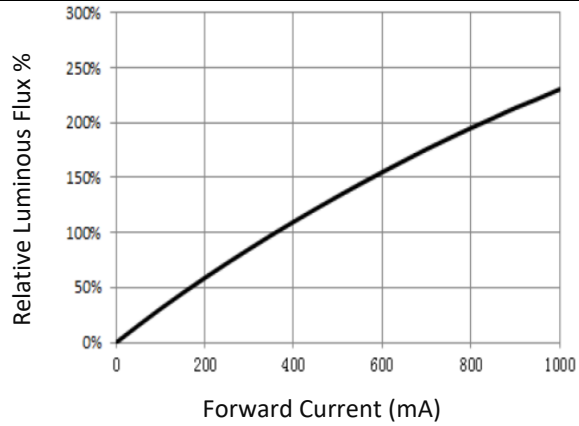


Forward Current v.s. Forward Voltage

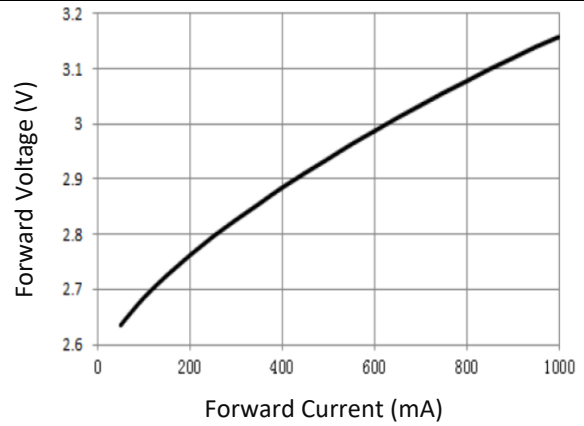


Relative Luminous Flux v.s. Junction Temp.

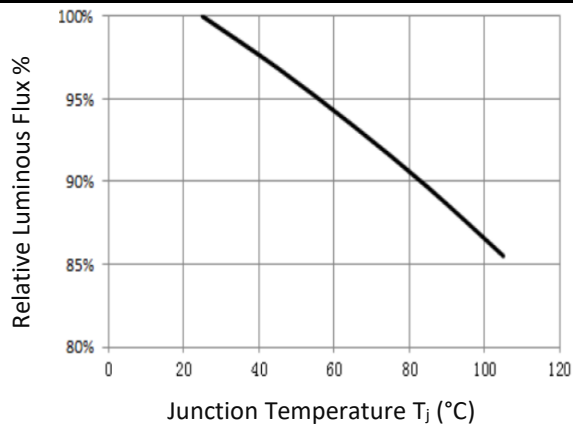


Forward Voltage v.s. Junction Temp.

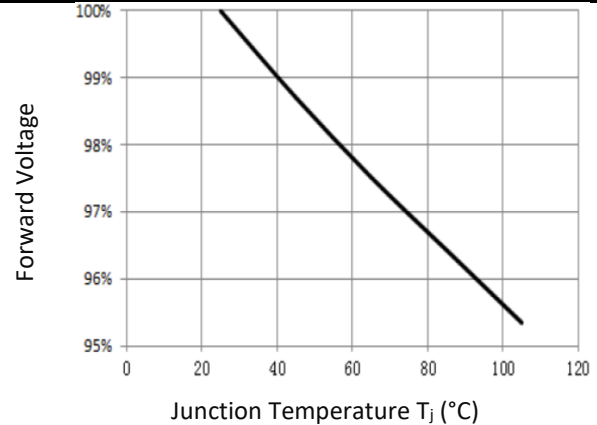


Relative Spectral Power v.s. Wavelength

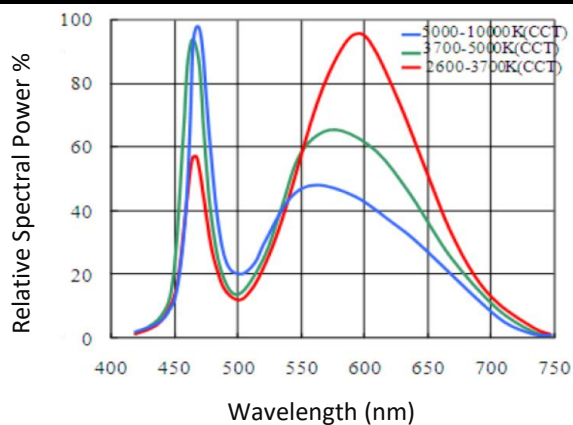


Directive Radiation

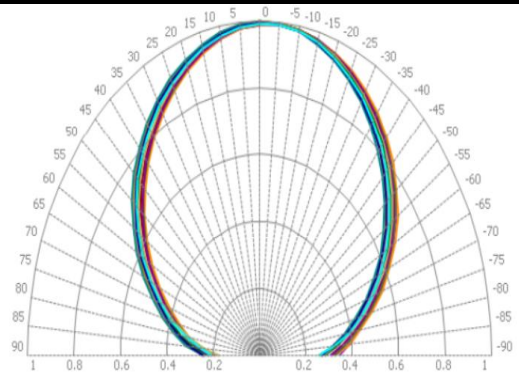

Ambient Temperature v.s. CIE X, Y Shift

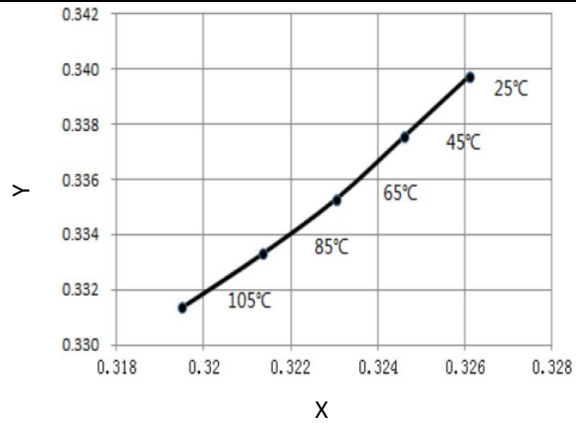


Forward Current Derating Curve

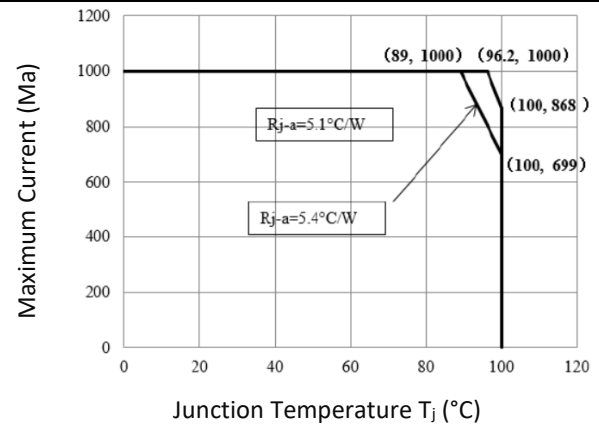

RECOMMENDED SOLDERING PROFILE:

Reflow Lead-free Solder:

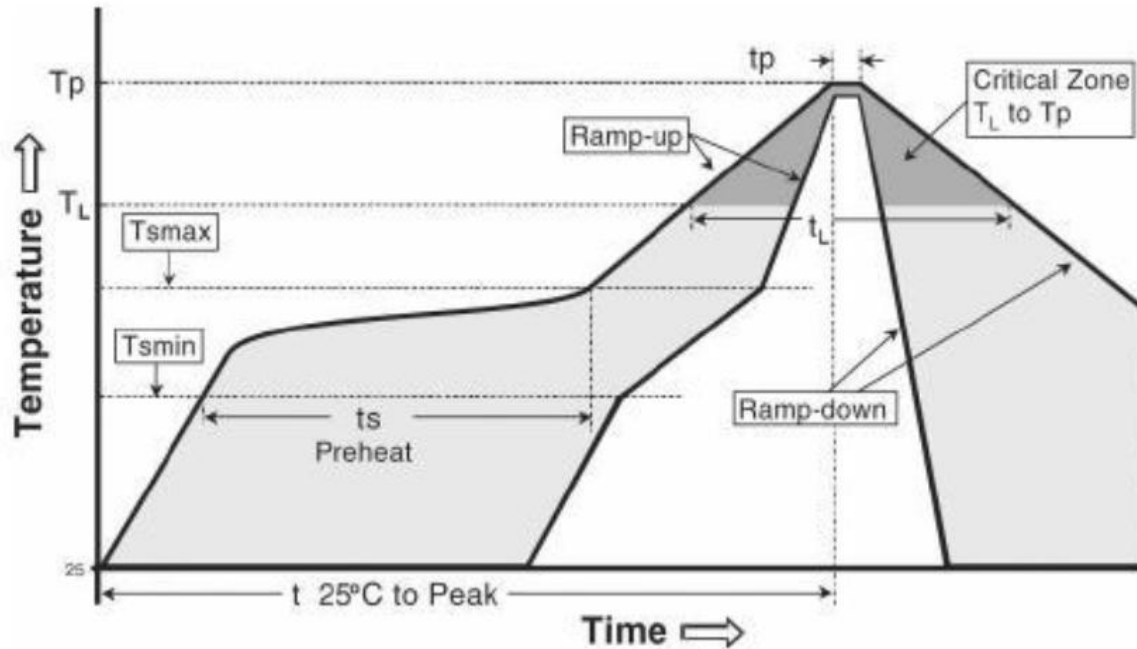

Temperature Min. (T_{smin})	150°C
Temperature Max. (T_{smax})	200°C
Period from T_{smin} to T_{smax}	60-120 seconds
Ramp-up Rate (T_L to T_P)	Max.3°C/second
Liquidous Temperature (T_L)	217°C
Time Maintained above T_L	60-150 seconds
Peak Package Temperature (T_P)	Max.260°C
Time within 5°C of the Specified Classification Temperature T_C	Max.30 seconds
Ramp-down Rate (T_P to T_L)	Max.6°C/second
Time from 25°C to Peak Temperature	Max.8 mins


Note:

1. Maximum reflow soldering: 1 time.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.
3. Recommended soldering temperature: 240°C. The maximum soldering temperature should be limited to 260°C for max. 10seconds.


PACKING SPECIFICATION:

Reel Dimension:

Max.900pcs/reel

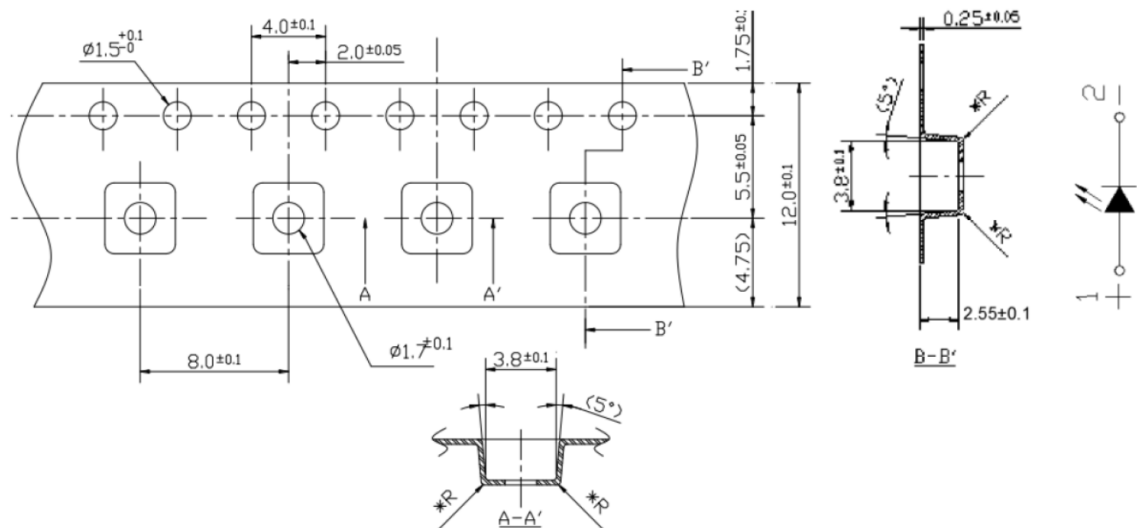

1. Cumulative Tolerance: Cumulative Tolerance/10 pitches to be $\pm 0.25\text{mm}$
2. Adhesion Strength of Cover Tape Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of 10° to the carrier tape.
- 3.

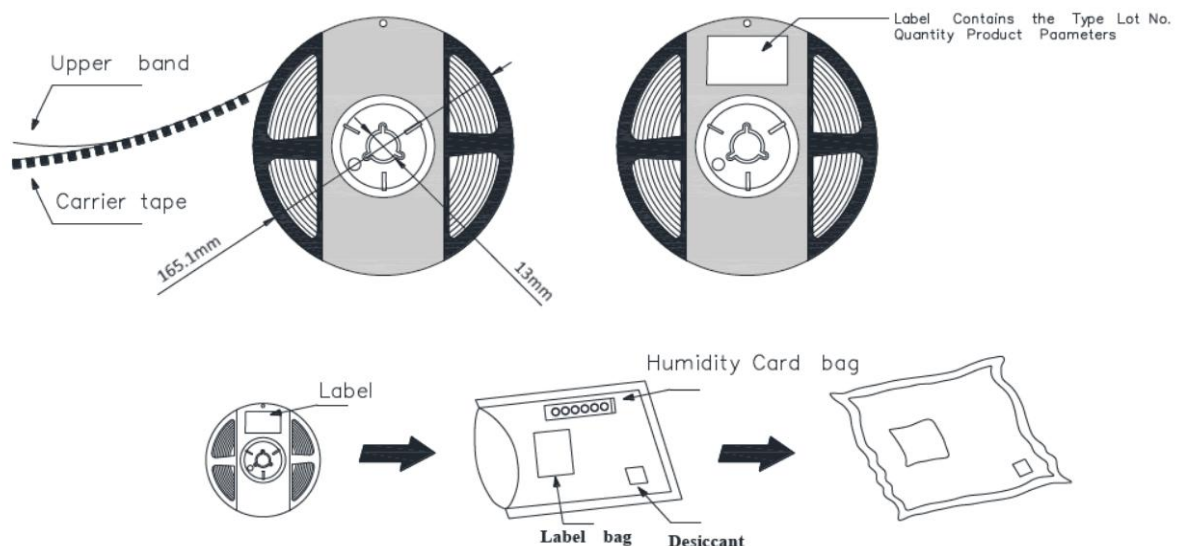

PRECAUTIONS OF USE:

Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking before use.

Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±5°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

Testing Circuit:



Must apply resistor(s) for protection (over current proof).

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

REVISION RECORD:

Version	Date	Summary of Revision
A1.0	11/10/2022	Datasheet set-up.
A1.1	02/04/2025	New datasheet format.