



# BRIGHTTEK

BRIGHTTEK (EUROPE) LIMITED

*Brighten up The World With LED!*



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

## PRODUCT DATASHEET



- ▶ Ceramic SMD
- ▶ 3535 2.30t
- ▶ Natural White 4000K

### NOW62S94 (CRI 90)



Release Date: 02 April 2025 Version: A1.1



3535 Ceramic Series

## 3535 Ceramic Series



### FEATURES:

- **Package:** Top View Ceramic Package
- **Forward Current:** 350~1000mA
- **Forward Voltage (typ.):** 3.0V
- **Luminous Flux (typ.):** 139lm@350mA
- **Colour:** Natural White
- **Colour Temperature (typ.):** 4000K
- **Viewing Angle:** 120°
- **Materials:**
  - Die: InGaN
  - Resin: Silicon (Yellow Diffused)
  - Package: Ceramic
- **Operating Temperature:** -40~+105°C
- **Storage Temperature:** -40~+85°C
- **Electrostatics Discharge (HBM):** 1000V
- **Grouping Parameters:**
  - Forward Voltage
  - Luminous Flux
  - CIE Chromaticity
- **Soldering Methods:** Reflow Soldering
- **MSL Level:** according to J-STD020 MSL 3
- **Packing:** 12mm tape with max.900/reel, ø165mm (6.5")

### APPLICATIONS:

- General Lighting
- Portable Lighting
- Commercial Lighting
- Indoor Lighting
- Architecture Lighting
- High Bay Light

## CHARACTERISTICS:

Absolute Maximum Characteristics ( $T_a=25^{\circ}\text{C}$ )

Parameter	Symbol	Ratings	Unit
DC Forward Current	$I_F$	1000	mA
Pulse Forward Current (Duty 1/10, width $\leq 100\mu\text{s}$ )	$I_{PF}$	1500	mA
Power Dissipation	$P_D$	3400	mW
Reverse Voltage	$V_R$	5	V
Reverse Current @10V	$I_R$	10	$\mu\text{A}$
Junction Temperature	$T_j$	125	$^{\circ}\text{C}$
Electrostatic Discharge (HBM)	ESD	1000	V
Thermal Resistance (Junction to Solder Point)	$R_{th(j-sp)}$	5	$^{\circ}\text{C}/\text{W}$
Operating Temperature	$T_{OPR}$	$-40\sim+105$	$^{\circ}\text{C}$
Storage Temperature	$T_{STG}$	$-40\sim+85$	$^{\circ}\text{C}$
Soldering Temperature	$T_{SOL}$	230/260 for 10S	$^{\circ}\text{C}$
Colour Rendering Index	CRI	min. 90 typ. 92	---

1.  $R_{th(j-sp)}$  is the thermal resistance from LED junction to solder point on MCPCB with electrical power.

## CHARACTERISTICS:


### Electrical & Optical Characteristics ( $T_a=25^{\circ}\text{C}$ )

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Forward Voltage	$V_F$	2.6	3.0	3.4	V	$I_F=350\text{mA}$
Luminous Flux ( $T_j=25^{\circ}\text{C}$ )	$\Phi_V$	130	139	---	lm	$I_F=350\text{mA}$
		---	270	---		$I_F=700\text{mA}$
Luminous Flux ( $T_j=85^{\circ}\text{C}$ )	$\Phi_V$	---	130	---	lm	$I_F=350\text{mA}$
		---	242	---		$I_F=700\text{mA}$
Chromaticity Coordinates	X	0.3670	---	0.4006	---	$I_F=350\text{mA}$
	Y	0.3578	---	0.4044		
Colour Temperature	CCT	---	4000	---	K	$I_F=350\text{mA}$
Viewing Angle	$2\theta_{1/2}$	---	120	---	deg	$I_F=350\text{mA}$

1. Luminous flux ( $\Phi_V$ )  $\pm 10\%$ , Forward Voltage ( $V_F$ )  $\pm 0.1\text{V}$ , CRI  $\pm 2$


## OUTLINE DIMENSION:

Package Dimension:

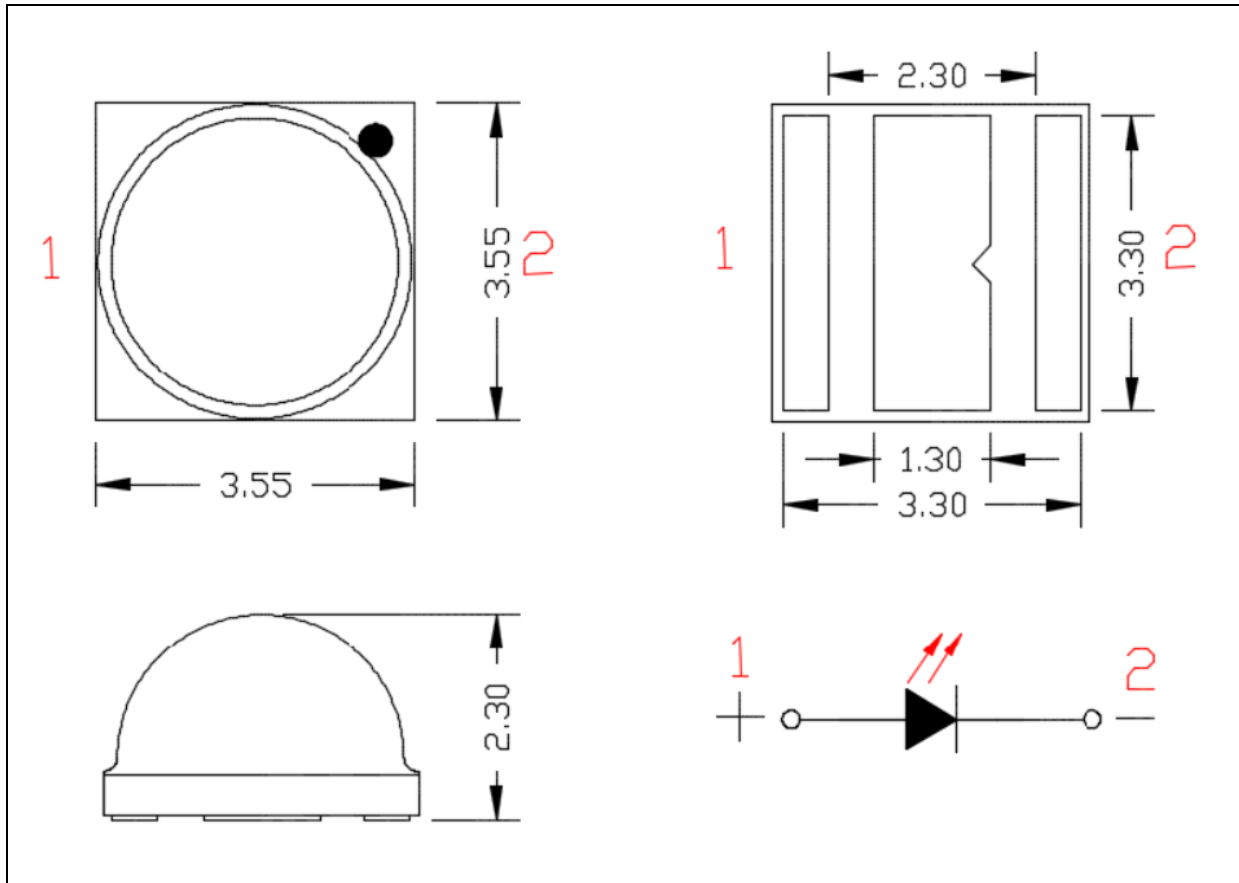

1. All dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.2\text{mm}$ , unless otherwise noted.

Recommended Soldering Pad Dimension:

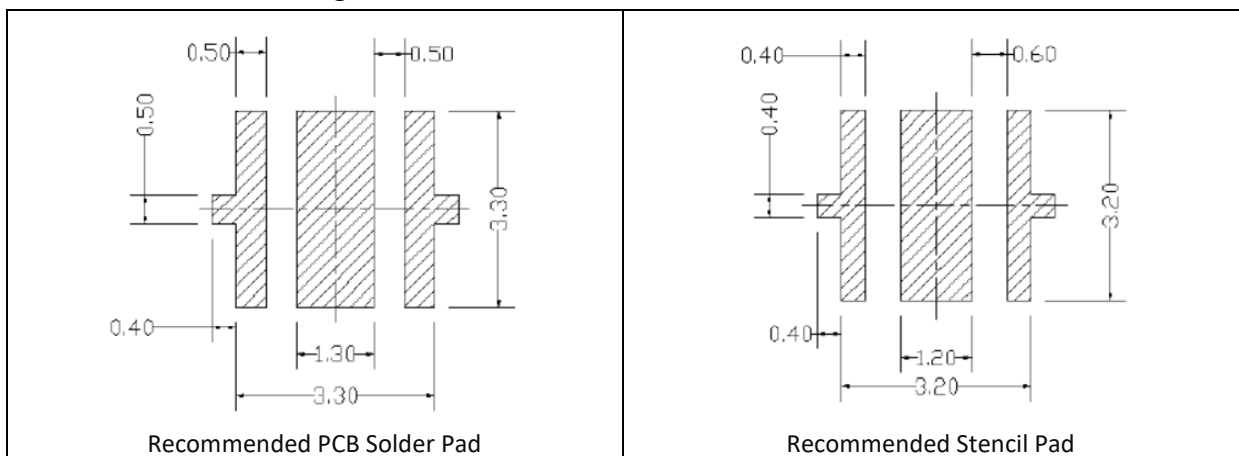

1. Dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.1\text{mm}$  with angle tolerance  $\pm 0.5^\circ$ .

## BINNING GROUPS:

---

Forward Voltage Classifications ( $I_F = 350\text{mA}$ ):


Code	Min.	Max.	Unit
G3	2.6	2.8	V
H3	2.8	3.0	
J3	3.0	3.2	
K3	3.2	3.4	

Luminous Flux Classifications ( $I_F = 350\text{mA}$ ):

Code	Min.	Max.	Unit
2F	130	139	lm
2G	139	148	
2H	148	156	
2J	156	164	
2K	164	172	



## CIE CHROMATICITY DIAGRAM:

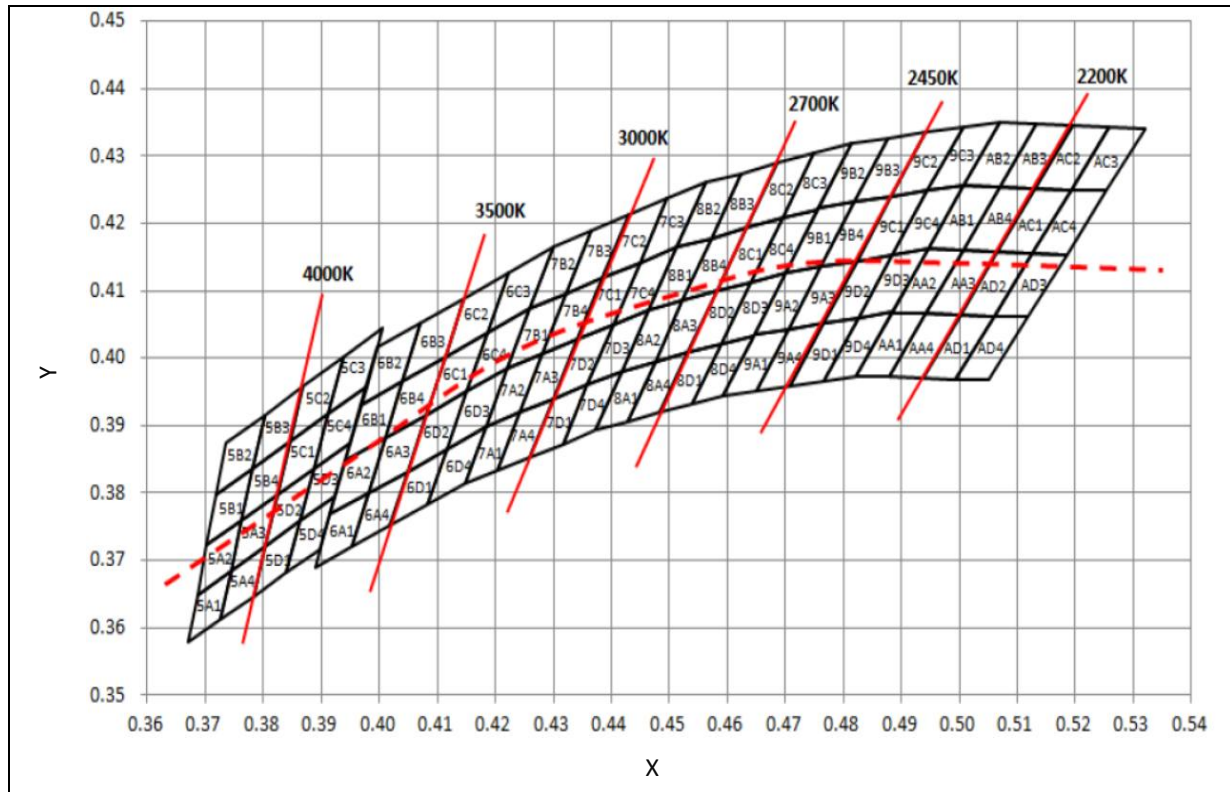

## Chromaticity Coordinates Classifications ( $I_F = 350\text{mA}$ ):

	1		2		3		4	
	X	Y	X	Y	X	Y	X	Y
5C3	0.3912	0.3917	0.3937	0.4001	0.4006	0.4044	0.3978	0.3958
5C4	0.3887	0.3836	0.3912	0.3917	0.3978	0.3958	0.3950	0.3875
5D3	0.3863	0.3758	0.3887	0.3836	0.3950	0.3875	0.3924	0.3794
5D4	0.3840	0.3681	0.3863	0.3758	0.3924	0.3794	0.3898	0.3716
5C2	0.3847	0.3877	0.3869	0.3958	0.3937	0.4001	0.3912	0.3917
5C1	0.3825	0.3798	0.3847	0.3877	0.3912	0.3917	0.3887	0.3836
5D2	0.3804	0.3721	0.3825	0.3798	0.3887	0.3836	0.3863	0.3758
5D1	0.3783	0.3646	0.3804	0.3721	0.3863	0.3758	0.3840	0.3681
5B3	0.3782	0.3837	0.3802	0.3916	0.3869	0.3958	0.3847	0.3877
5B4	0.3763	0.3760	0.3782	0.3837	0.3847	0.3877	0.3825	0.3798
5A3	0.3744	0.3685	0.3763	0.3760	0.3825	0.3798	0.3804	0.3721
5A4	0.3726	0.3612	0.3744	0.3685	0.3804	0.3721	0.3783	0.3646

---


Chromaticity Coordinates Classifications ( $I_F = 350\text{mA}$ ):

	1		2		3		4	
	X	Y	X	Y	X	Y	X	Y
5B2	0.3719	0.3797	0.3736	0.3874	0.3802	0.3916	0.3782	0.3837
5B1	0.3702	0.3722	0.3719	0.3797	0.3782	0.3837	0.3763	0.3760
5A2	0.3686	0.3649	0.3702	0.3722	0.3763	0.3760	0.3744	0.3685
5A1	0.3670	0.3578	0.3686	0.3649	0.3744	0.3685	0.3726	0.3612




## ELECTRO-OPTICAL CHARACTERISTICS:


Relative Luminous Flux v.s. Forward Current

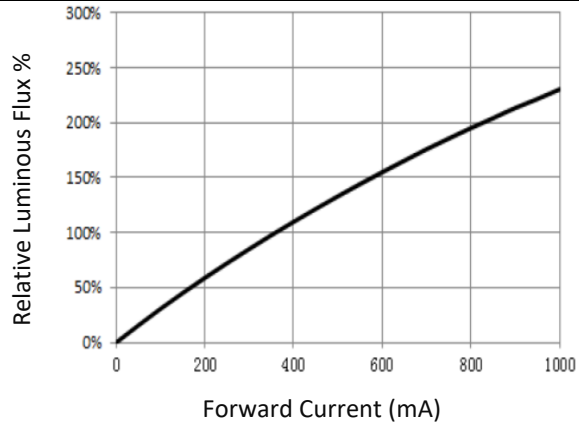


Forward Current v.s. Forward Voltage

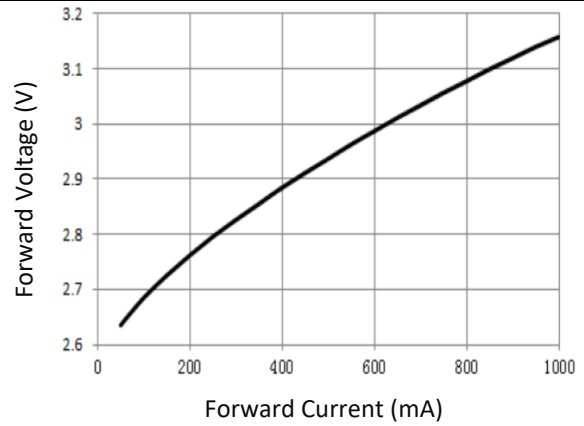


Relative Luminous Flux v.s. Junction Temp.

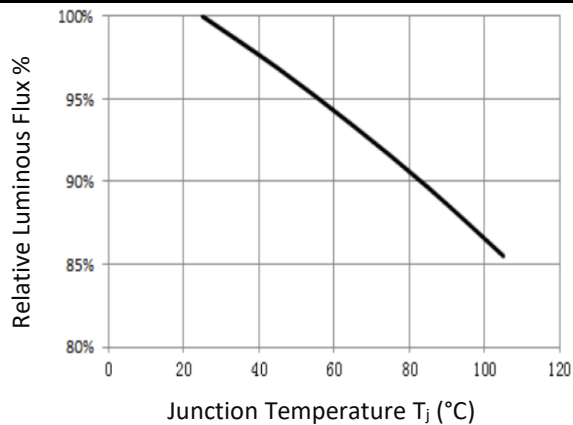


Forward Voltage v.s. Junction Temp.

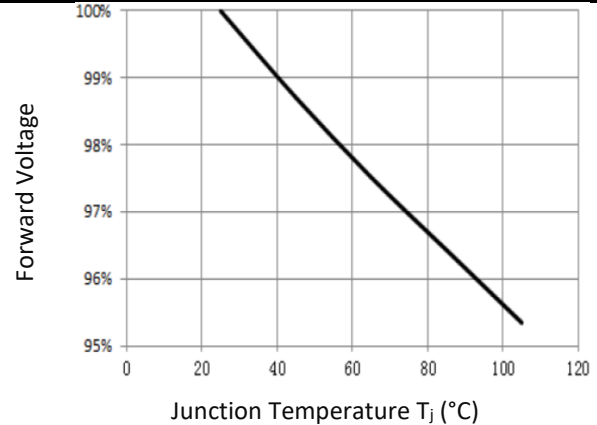

Relative Spectral Power v.s. Wavelength

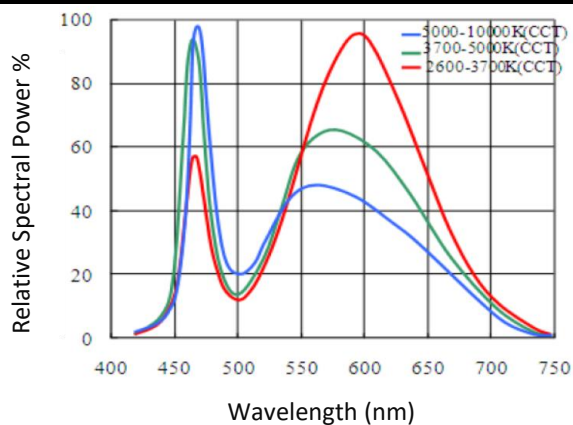


Directive Radiation

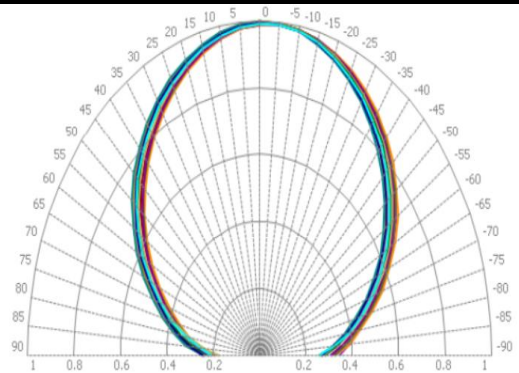






Ambient Temperature v.s. CIE X, Y Shift

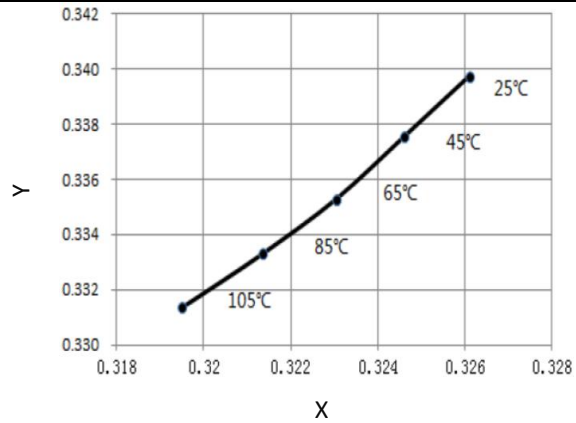


Forward Current Derating Curve

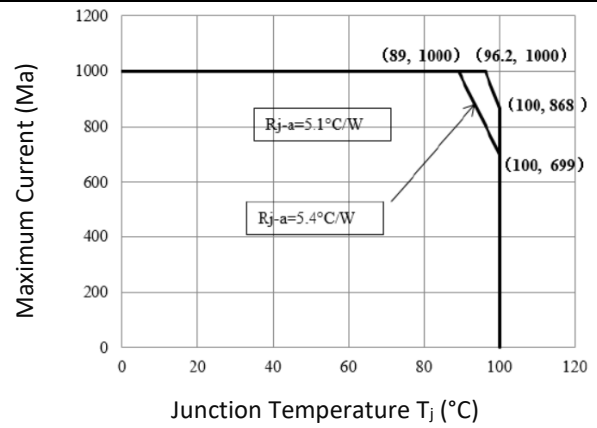

## RECOMMENDED SOLDERING PROFILE:

Reflow Lead-free Solder:

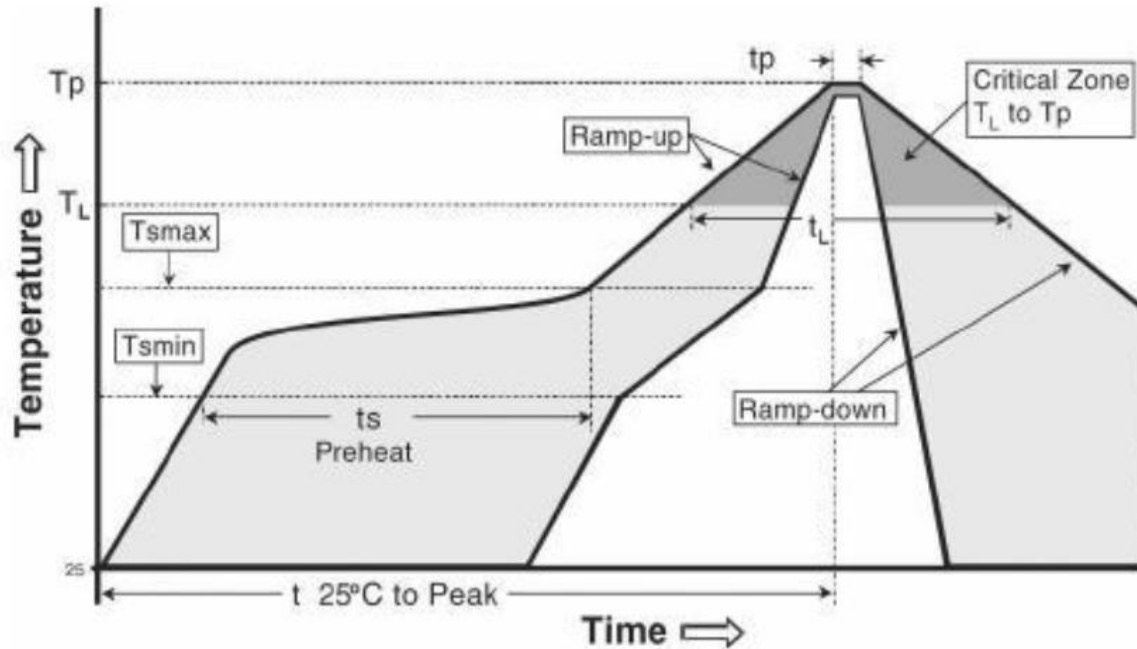

Temperature Min. (T <sub>smin</sub> )	150°C
Temperature Max. (T <sub>smax</sub> )	200°C
Period from T <sub>smin</sub> to T <sub>smax</sub>	60-120 seconds
Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )	Max.3°C/second
Liquidous Temperature (T <sub>L</sub> )	217°C
Time Maintained above T <sub>L</sub>	60-150 seconds
Peak Package Temperature (T <sub>P</sub> )	Max.260°C
Time within 5°C of the Specified Classification Temperature T <sub>C</sub>	Max.30 seconds
Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )	Max.6°C/second
Time from 25°C to Peak Temperature	Max.8 mins


Note:

1. Maximum reflow soldering: 1 time.
2. Before, during, and after soldering, should not apply stress on the components and PCB board.
3. Recommended soldering temperature: 240°C. The maximum soldering temperature should be limited to 260°C for max. 10seconds.



## PACKING SPECIFICATION:

Reel Dimension:

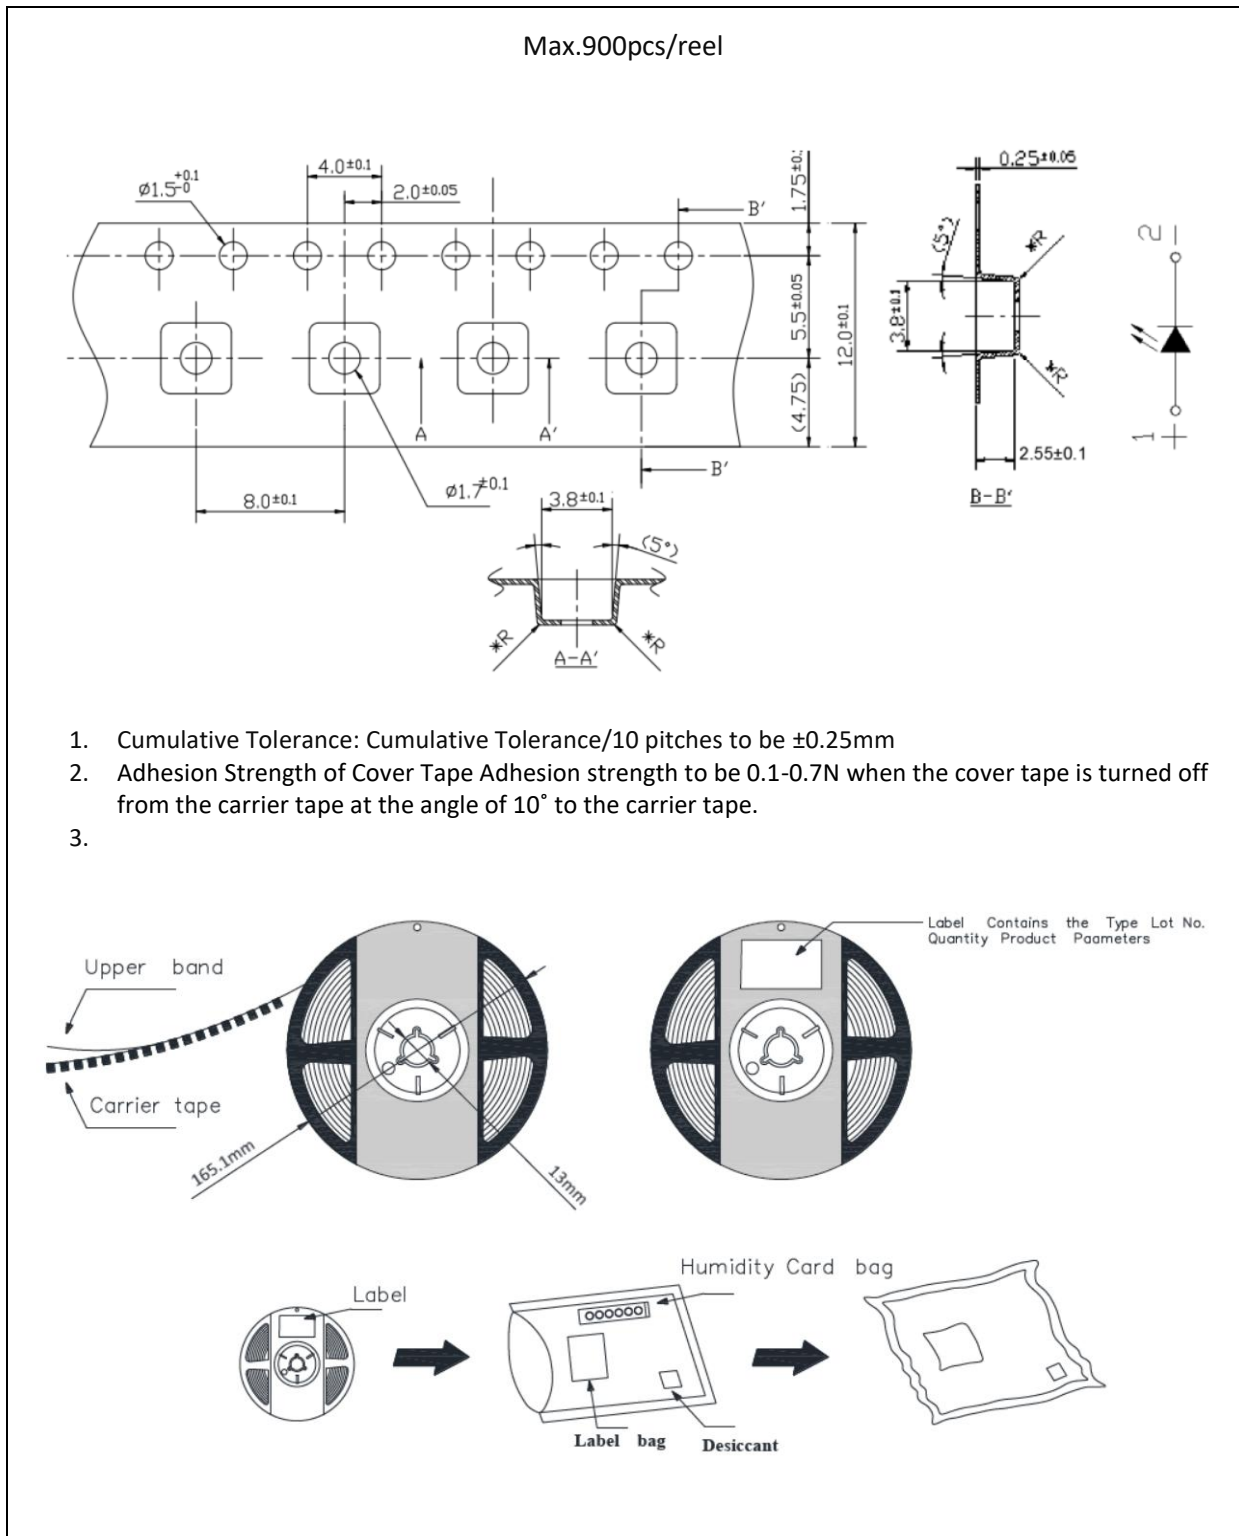

## PRECAUTIONS OF USE:

---

### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking before use.

### Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

- 60±5°C x 24hrs and <5%RH, taped / reel package.

It's normal to see slight color fading of carrier (light yellow) after baking in process.

### Testing Circuit:



Must apply resistor(s) for protection (over current proof).

### Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

**REVISION RECORD:**

---

Version	Date	Summary of Revision
A1.0	11/10/2022	Datasheet set-up.
A1.1	02/04/2025	New datasheet format.