



# BRIGHTTEK

BRIGHTTEK (EUROPE) LIMITED

*Brighten up The World With LED!*



ISO/TS 16949:2009



BS EN ISO 14001:2004



QC 080000 IECQ HSPM

## PRODUCT DATASHEET




- ▶ COB Module
- ▶ 15.85x15.85x1.65mm
- ▶ Natural White 4000K

# NOW63M19



Release Date: 17 April 2025 Version: A1.1

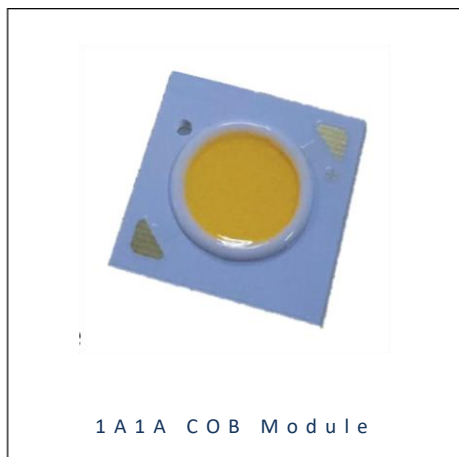

1 A 1 A C O B M o d u l e

## 1A1A COB Module

**RoHS**  
Compliant



### FEATURES:

- **Package:** Top View COB Light Engine Module
- **Forward Current:** 330~600mA
- **Forward Voltage (typ.):** 35.4V
- **Luminous Flux (typ.):** 1440lm@330mA
- **Colour:** Natural White
- **Colour Temperature (CCT):** 4000K
- **Viewing Angle:** 120°
- **Materials:**
  - Die: InGaN
  - Resin: Silicon (Yellow Diffused)
  - Package: MCPCB
- **Operating Temperature:** -40~+100°C
- **Storage Temperature:** -40~+120°C
- **Grouping Parameters:**
  - Forward Voltage
  - Luminous Flux
  - CIE Chromaticity
- **MSL Level:** 3 according to J-STD020
- **Packing:** 54pcs/tray; 270pcs/carton

### APPLICATIONS:

- Commercial Lighting
- Tunnel Light
- Spotlight
- General Lighting

## CHARACTERISTICS:

### Absolute Maximum Characteristics ( $T_a=25^{\circ}\text{C}$ )

| Parameter                    | Symbol       | Ratings  | Unit                 |
|------------------------------|--------------|----------|----------------------|
| DC Forward Current           | $I_F$        | 600      | mA                   |
| Power Dissipation            | $P_D$        | 21.72    | W                    |
| Junction Temperature *       | $T_j$        | 125      | $^{\circ}\text{C}$   |
| Operating Temperature        | $T_{OPR}$    | -40~+100 | $^{\circ}\text{C}$   |
| Storage Temperature          | $T_{STG}$    | -40~+120 | $^{\circ}\text{C}$   |
| Thermal Resistance           | $R_{thj-sp}$ | 0.6      | $^{\circ}\text{C/W}$ |
| Colour Rendering Index (CRI) | R9           | min.83   | ---                  |
|                              | Ra           | min.95   |                      |

\*  $R_{thj-sp}$  is the thermal resistance from LED junction to solder point on MCPCB with electrical power.

### Electrical & Optical Characteristics ( $T_a=25^{\circ}\text{C}$ )


| Parameter                | Symbol          | Values |        |      | Unit | Test Condition     |
|--------------------------|-----------------|--------|--------|------|------|--------------------|
|                          |                 | Min.   | Typ.   | Max. |      |                    |
| Forward Voltage          | $V_F$           | 33.0   | 35.4   | ---  | V    | $I_F=330\text{mA}$ |
| Luminous Flux            | $\Phi_v$        | 1340   | 1440   | 1584 | lm   | $I_F=330\text{mA}$ |
| Chromaticity Coordinates | X               | ---    | 0.3818 | ---  | ---  | $I_F=330\text{mA}$ |
|                          | Y               | ---    | 0.3797 | ---  |      |                    |
| Colour Temperature       | CCT             | ---    | 4000   | ---  | K    | $I_F=330\text{mA}$ |
| Viewing Angle            | $2\theta_{1/2}$ | ---    | 120    | ---  | deg  | $I_F=330\text{mA}$ |

1. Luminous flux ( $\Phi_v$ )  $\pm 10\%$ , Forward Voltage ( $V_F$ )  $\pm 0.1\text{V}$ , CRI  $\pm 2$



## OUTLINE DIMENSION:


Package Dimension:

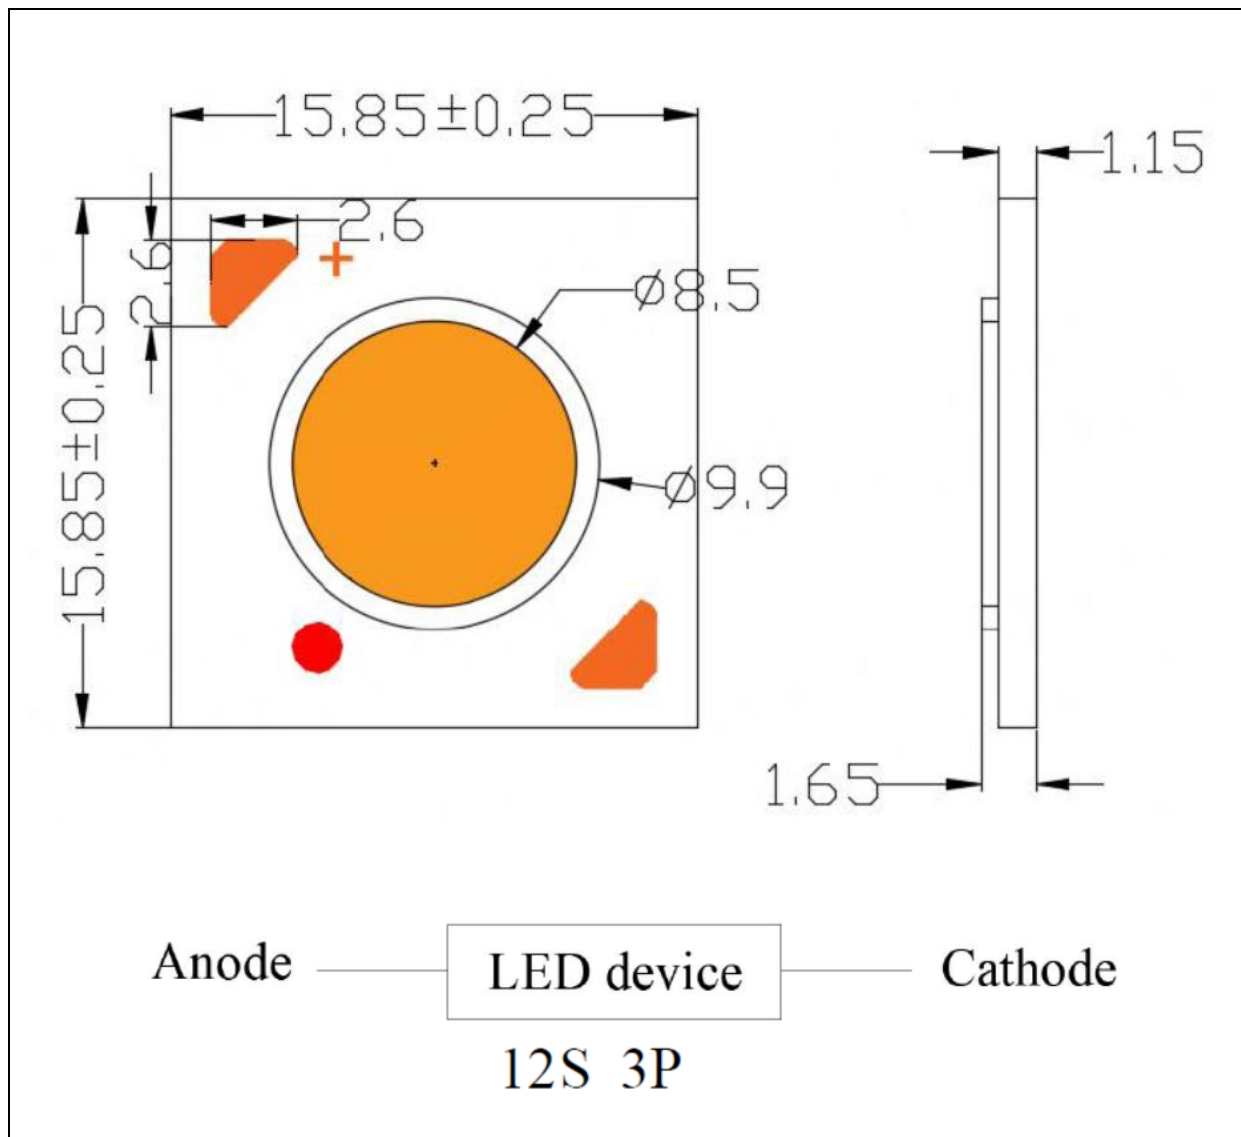


1. All dimensions are in millimetre (mm).
2. Tolerance  $\pm 0.2$ mm, unless otherwise noted.



## CIE CHROMATICITY DIAGRAM:

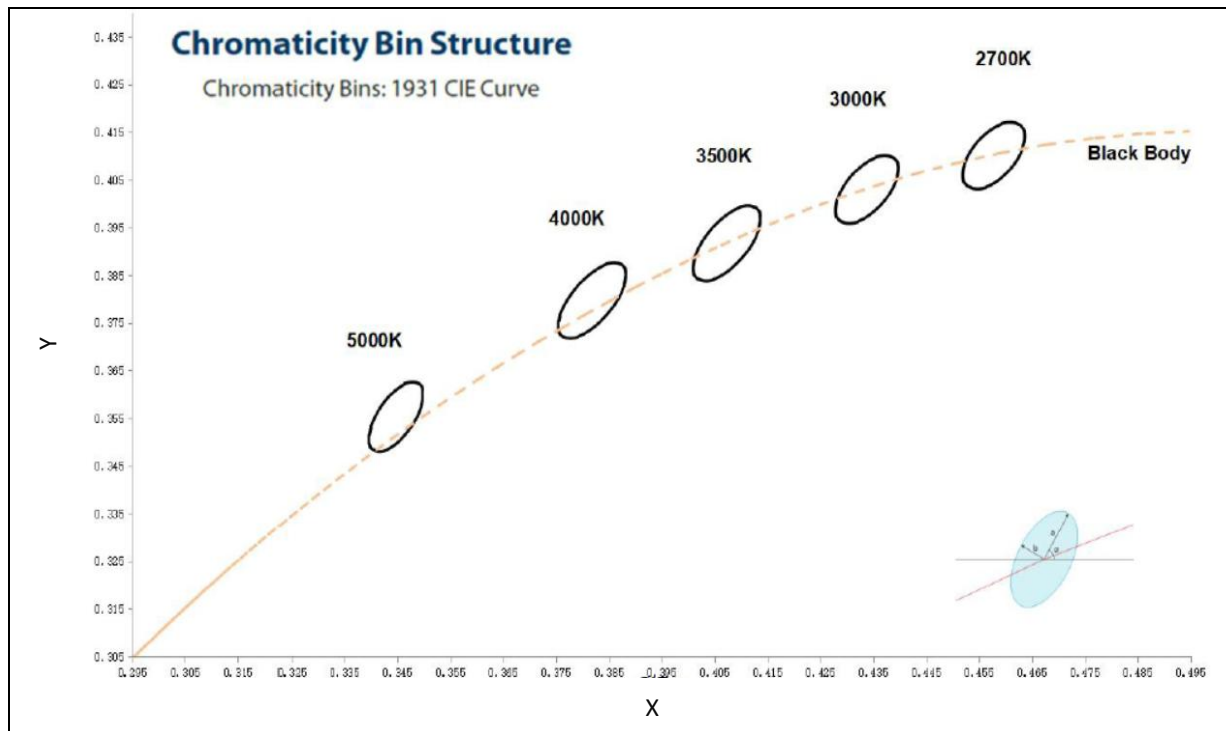


### Chromaticity Coordinates Classifications ( $I_F = 330\text{mA}$ ):

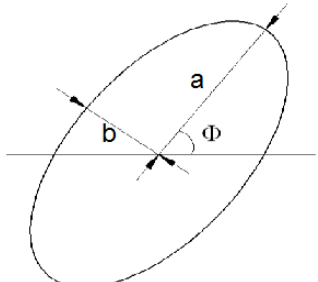
|  | Code             | Centre |        | Radius   |          | Angle  |
|---|------------------|--------|--------|----------|----------|--------|
|   |                  | X      | Y      | a        | b        | $\Phi$ |
|   | 40M3<br>(3 STEP) | 0.3818 | 0.3797 | 0.009390 | 0.004020 | 53.72  |

## ELECTRO-OPTICAL CHARACTERISTICS:


Relative Luminous Flux v.s. Forward Current

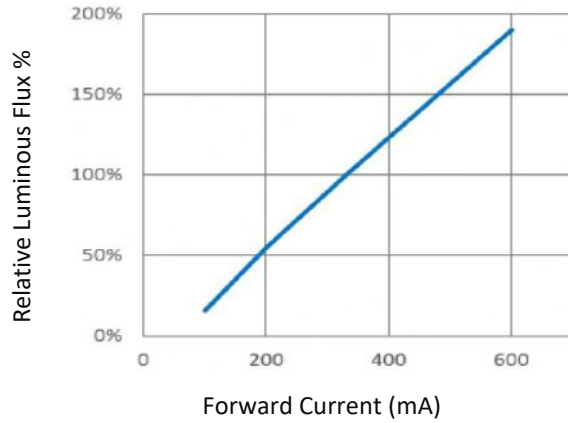


Forward Current v.s. Forward Voltage

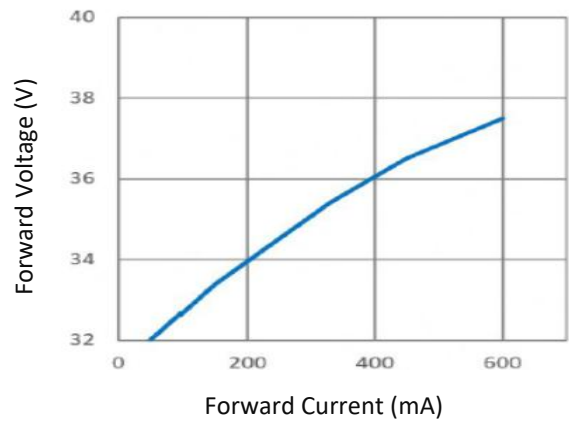


Relative Luminous Flux v.s. Case Temp.

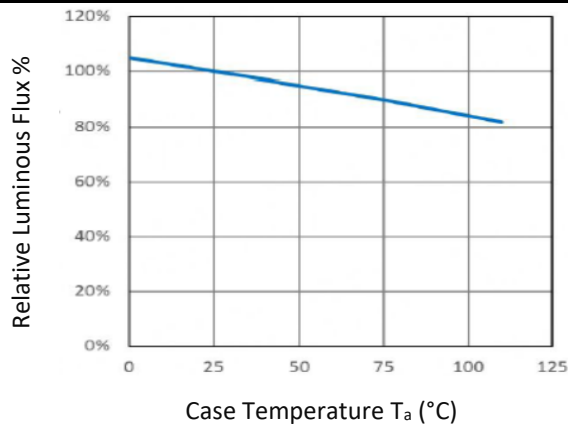


Forward Voltage v.s. Case Temp.

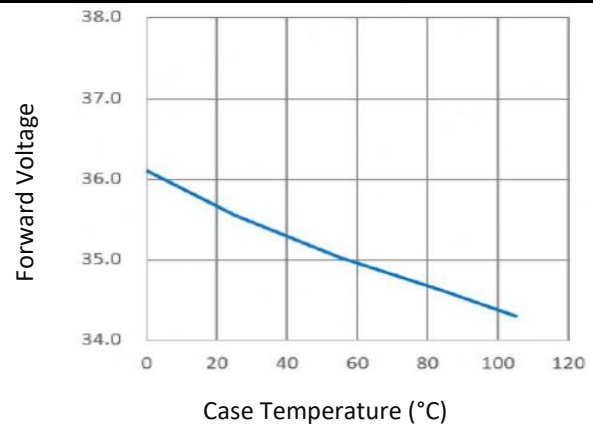


Relative Spectral Power v.s. Wavelength  
(curve shown 2700K/3000K/4000K CCT)

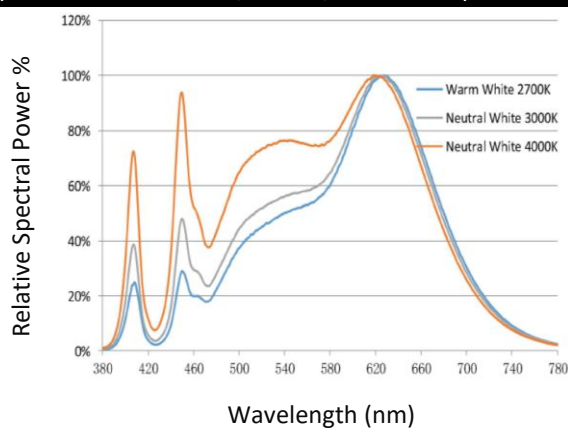

Directive Radiation

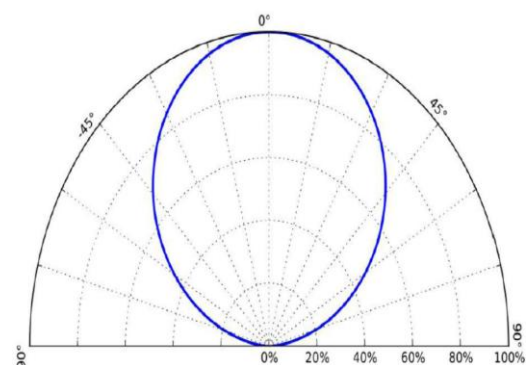

Forward Current Derating Curve

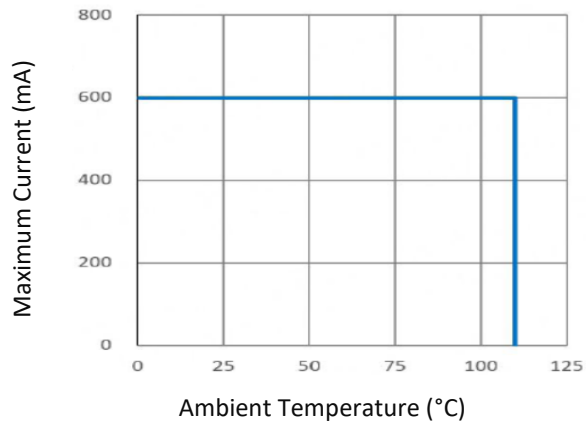

## PRECAUTIONS OF USE:

---

### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.


Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with desiccating agent <10% R.H. and apply baking before use.

### Thermal Management:

Thermal management is a key factor affecting the life of LEDs. The life span of LEDs will reduce with the increase of junction temperature. Please make sure that the temperature of  $T_j$  is lower than 125°C during application.

The silicone casting will begin to degrade at 180°C and shall be crack in a few days. Please avoid silicone surface temperature higher than 180°C.

### Testing Circuit:

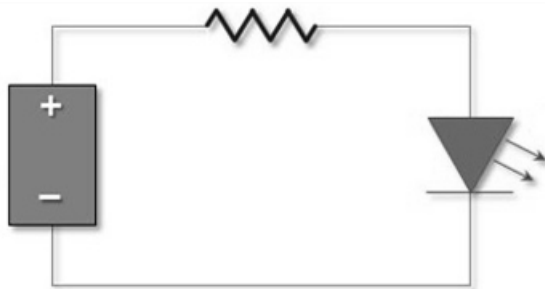

Must apply resistor(s) for protection (over current proof).

### Chemical Corrosion:

COB is packaged with soft silicone. Its design is not waterproof, thus please do not dip the COB into water directly. Please avoid silicone contact with sulfur dioxide, sulfuric acid, concentrated hydrochloric acid, and keep dry and sealed during storage.

### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.

**REVISION RECORD:**

---

| Version | Date       | Summary of Revision    |
|---------|------------|------------------------|
| A1.0    | 25/11/2022 | Datasheet set-up.      |
| A1.1    | 17/04/2025 | Update specifications. |