

# **Specification for Approval**

Customer:	
-----------	--

Model Name:

Sı	upplier Approv	Customer approval	
R&D Designed	R&D Approved	QC Approved	
Peter	Peng Jun		



## **Revision Record**

REV NO.	<b>REV DATE</b>	CONTENTS	Note
A	2019-04-01	NEW ISSUE	



## Table of Contents

List	Description	Page No.
	Cover	1
	Revision Record	2
	Table of Contents	3
1	Scope	4
2	General Information	4
3	External Dimensions	5
4	Interface Description	6
5	Absolute Maximum Ratings	7
6	DC Characteristics	7
7	Timing Characteristics	8
8	Backlight Characteristics	10
9	Optical Characteristics	11
10	Reliability Test Conditions and Methods	13
11	Inspection Standard	14
12	Handling Precautions	19
13	Precaution for Use	20
14	Packing Method	20



#### 1. Scope

This specification defines general provisions as well as inspection standards for TFT module supplied by AMSON electronics.

If the event of unforeseen problem or unspecified items may occur, naturally shall negotiate and agree to solution.


## 2. General Information

ITEM	STANDARD VALUES	UNITS
LCD type	10.1"TFT	
Dot arrangement	1280×3(RGB)×800	dots
Color filter array	RGB vertical stripe	
Display mode	Normally Black	-
Viewing Direction	85/85/85	
Module size	229.46(W)×149.10(H)×2.8(T)	mm
Active area	216.96(W)×135.60(H)	mm
Dot pitch	0.1695(W)×0.1695(H)	mm
Interface	8-BIT LVDS Interface	
Operating temperature	-20 ~ +70	°C
Storage temperature	-30 ~ +80	°C
Weight	TBD	g



## AM-1280800-1011

## 3. External Dimensions

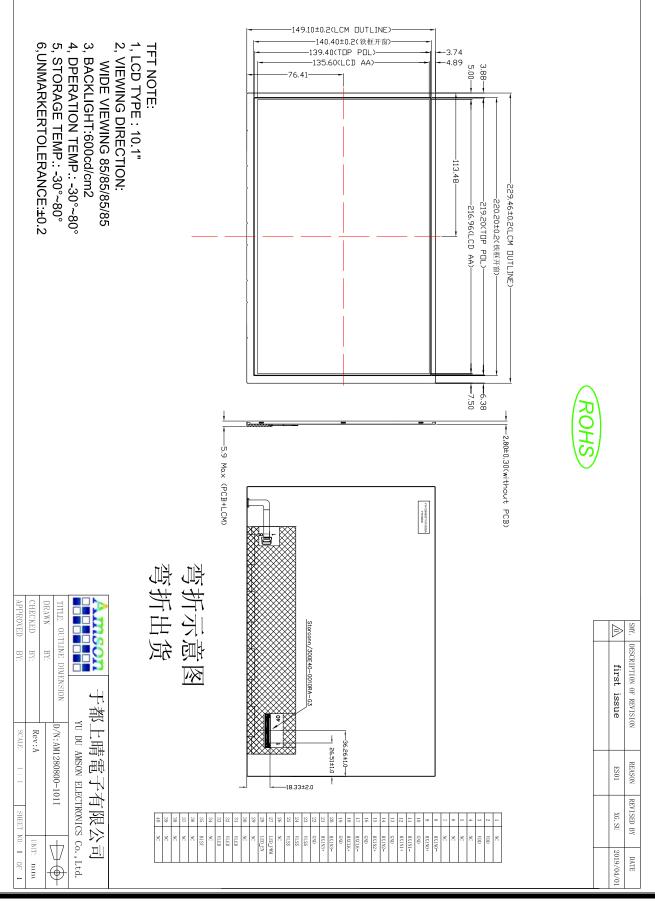

Page 5 of 20

YU DU AMSON ELECTRONICS CO., LTD.



## 4. Interface Description


PIN	PIN NAME	DESCRIPTION
1	NC	No connection
2	VDD	
3	VDD	Power Supply
4	NC	
5	NC	No connection
6	NC	
7	NC	No connection
8	RXIN0-	-LVDS Differential Data Input
9	RXIN 0+	+LVDS Differential Data Input
10	GND	Ground
11	RXIN 1-	-LVDS Differential Data Input
12	RXIN 1+	+LVDS Differential Data Input
13	GND	Ground
14	RXIN 2-	-LVDS Differential Data Input
15	RXIN 2+	+LVDS Differential Data Input
16	GND	Ground
17	RXCLK-	-LVDS Differential Clock Input
18	RXCLK+	+LVDS Differential Clock Input
19	GND	Ground
20	RXIN 3-	-LVDS Differential Data Input
21	RXIN 3+	+LVDS Differential Data Input
22	GND	Ground
23~25	VLSS	Ground
26	NC	No connection
27	LED_PWM	CABC controller signal output for backlight
28	LED_EN	CABC Enable Input
29	NC	No connection
30	NC	No connection
31~33	VLED	VIN Voltage
34	NC	No connection
35	BIST	No connection
36~40	NC	No connection



## 5. Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit	Remark
Digital Supply Voltage	VDD	-0.3	4.0	V	
VIN Voltage	VLED	-0.3	50	V	
Operating Temperature	Тор	-20	70	°C	
Storage Temperature	Тѕт	-30	80	°C	


### 5.1 POWER SUPPLY FOR LCM

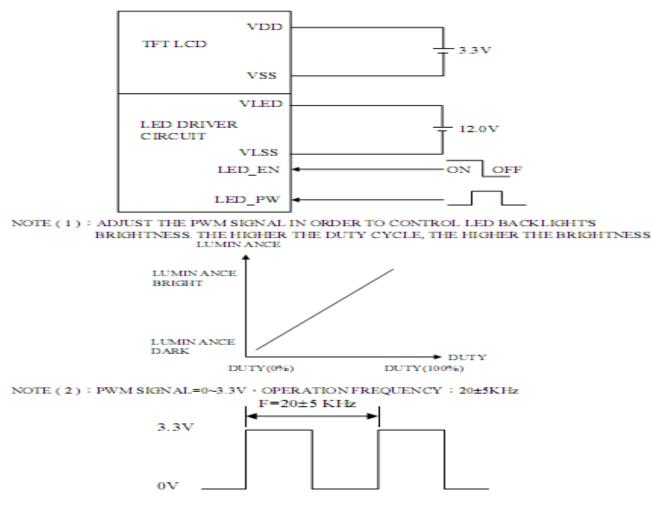

#### 6. DC Characteristics

ltem	Symbol	Min.	Тур.	Max.	Unit	Remark
Digital Supply Voltage	VDD	2.75	3.3	3.6	V	
VIN Voltage	VLED	4.5	-	40		
Input logic high voltage	Vін	0.7*VDD	-	VDD	V	
Input logic low voltage	VIL	GND	-	0.3*VDD	V	

### 7. Timing Characteristics 7.1 Power On and Reset Timing

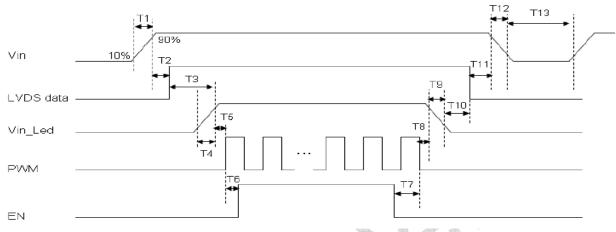


Symbol	Unit	Min	Тур.	Max
T1	ms	0.5		10
T2	ms	30		90
Т3	ms	200		
T4	ms	0.5		
🕨 Т5	ms	10		
Т6	ms	10		
Т7	ms	0		
Т8	ms	10		
Т9	ms	0.5	10	30
T10	ms	200		
T11	ms	0		50
T12	ms	0.5	10	30
T13	ms	500		
	T1 T2 T3 T4 T5 T6 T7 T8 T9 T10 T11 T12	T1         ms           T2         ms           T3         ms           T4         ms           T5         ms           T6         ms           T7         ms           T8         ms           T9         ms           T10         ms           T11         ms           T12         ms	T1         ms         0.5           T2         ms         30           T3         ms         200           T4         ms         0.5           T5         ms         10           T6         ms         10           T7         ms         0           T8         ms         10           T9         ms         0.5           T10         ms         200           T11         ms         0           T12         ms         0.5	T1         ms         0.5            T2         ms         30            T3         ms         200            T4         ms         0.5            T5         ms         10            T6         ms         10            T7         ms         0            T8         ms         10            T9         ms         0.5         10           T10         ms         200            T11         ms         0            T12         ms         0.5         10

## 7.2 LVDS Signal Timing Characteristics

## 7.2.1 DC Characteristics


Symbol	Parameter	Conditions	Min.	Тур.	Max	Unit
V <sub>TH</sub>	Differential Input High Threshold		-	-	100	mV
V <sub>TL</sub>	Differential Input Low Threshold	V <sub>CM</sub> =+1.2V	-100	-	-	mV
Icc	Average Supply Current		-	TBD	-	mA

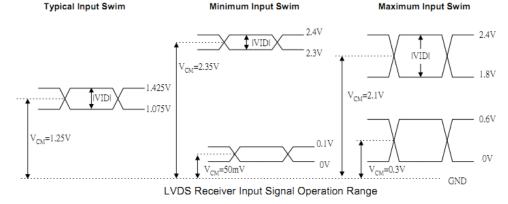



### 7.2.2 AC Characteristics


Symbol	Parameter	Conditions	Min.	Тур.	Max	Unit
_		RX_HF=0	25	-	100	MHz
F <sub>OP</sub>	Input Operating Frequency range	RX_HF=1	100	-	170	MHz
		85MHz,  VID =400mV, V <sub>CM</sub> =1.2V	450	-	-	pS
R <sub>SKM</sub>	Receiver Skew Margin	150MHz,  VID =400mV, V <sub>CM</sub> =1.2V	267	-	-	pS
-	Receiver startup time (after a valid LVDS				40	
T <sub>STRAT</sub>	clock is applied)		-	-	10	mS

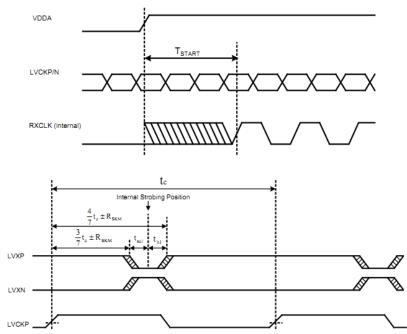

NOTE: LVCK is advanced or delayed with respect to data until errors are observed at the receiver outputs. The advance or delay is then reduced until there are no data errors observed. The magnitude of the advance or delay is RSKM.

## 7.2.3 mini-LVDS Output Timing

mini-LVDS Reset Pules Timing

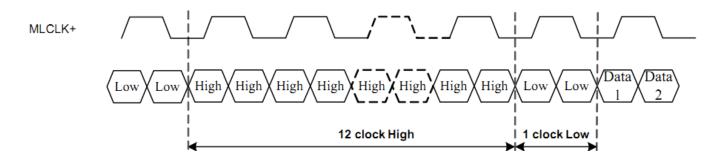

١

## 7.2.3 Interface Timings

Symbol	Unit	Min.	Тур.	Max.
	Hz	-	60	-
tV	line	(815)	(823)	(1023)
tVD	line		800	
tVW+tVBP+tVFP	line	(15)	(23)	(33)
tH	clock	(1410)	(1440)	(1470)
tHD	clock		1280	•
tHW+tHBP+tHFP	clock	(60)	(160)	(190)
1/TC	MHz	(68.9)	(71.1)	(73.4)
	 tV tVD tVW+tVBP+tVFP tH tHD tHW+tHBP+tHFP	Hz           tV         line           tVD         line           tVW+tVBP+tVFP         line           tH         clock           tHD         clock           tHW+tHBP+tHFP         clock	Hz         -           tV         line         (815)           tVD         line         (15)           tVW+tVBP+tVFP         line         (15)           tH         clock         (1410)           tHD         clock         (60)	Hz         -         60           tV         line         (815)         (823)           tVD         line         800           tVW+tVBP+tVFP         line         (15)         (23)           tH         clock         (1410)         (1440)           tHD         clock         1280         1280           tHW+tHBP+tHFP         clock         (60)         (160)

## 8. Backlight Characteristic


Item		Symbol	MIN	ТҮР	MAX	UNIT	NOTE
Backlight Power		LED_VCC	8	12	15	V	Ta = 25°C
Backlight Power		ILED_VCC	-	(0.7)	(0.9)	А	LED_VCC=12V
EN Signal Voltage	VIH		1.65		5.25	V	
EN Signal Voltage	VIL	LED_EN	GND		0.4	V	
Luminous Intensity	VIH	LED PWM	0.8Ven		5.25	V	
for LCM	for LCM VIL		GND		0.2Ven	V	
PWM Frequency		LED_PWM	100		20000	Hz	
Lifetime			50000	-	-	Hr	
Color				W	/hite		
Average Brightness		_	500	600	-	Cd/cm2	
Luminance unifor	-		80	-	%		



#### 9. Optical Characteristics


ltem	Conditions		Min.	Тур.	Max.	Unit	Note	
Viewing Angle	Horizontal	θ∟	-	85	-	degree		
	HUHZUHIAI	θR	-	85	-		(1),(2),(6)	
(CR>10)	Vertical	θτ	-	85	-			
	ventical	θв	-	85	-			
Contrast Ratio	Center		600	800	-	-	(1),(3),(6)	
Response Time	Rising Falling			25	35	ms	(1),(4),(6)	
Response nine								
	Red x Red y Green x		Typ. −0.05	0.599	Typ. +0.05	-	(1), (6)	
				0.326		-		
				0.300		-		
CF Color Chromaticity	Green y			0.546		-		
(CIE1931)	Blue x			0.149		-		
	Blue y			0.181		-		
	White x			0.301		-		
	White y			0.341		-		

Note (1) Measurement Setup: The LCD module should be stabilized at given temp. 25°C for 15 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless room.

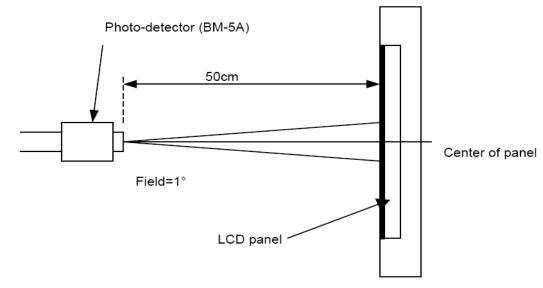



#### Note (2) Definition of Viewing Angle

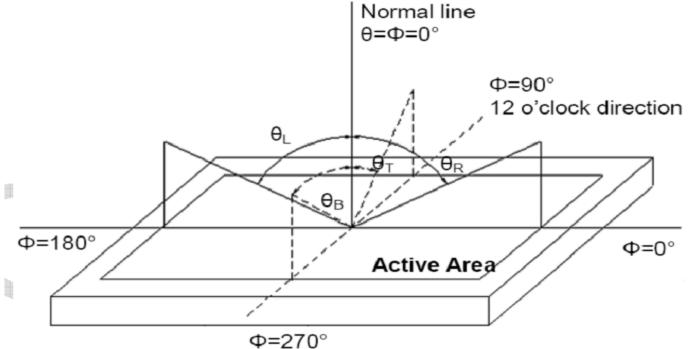


Note (3) Definition of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression Contrast Datia (CD) = 1.62 (1.0)

Contrast Ratio (CR) = L63 / L0

L63: Luminance of gray level 63, L0: Luminance of gray level 0

Note (4) Definition of response time

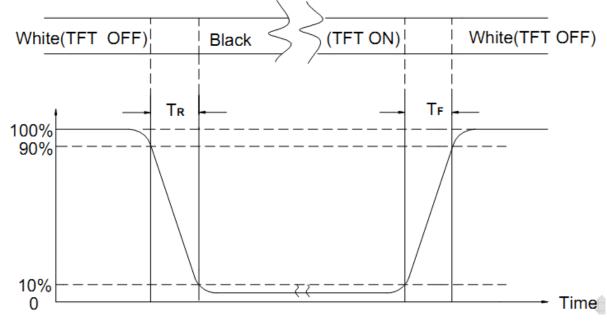

- Note (5) Definition of Transmittance (Module is without signal input) Transmittance = Center Luminance of LCD / Center Luminance of Back Light x 100%
- Note (6) Definition of color chromaticity (CIE1931)

Color coordinates measured at the center point of LCD



## 10. Reliability Test Conditions and Methods

NO.	TEST ITEMS	TEST CONDITION				
1	High Temperature Storage	Keep in 80°C $\pm$ 5°C 96 hrs Surrounding temperature, then storage at normal condition 4hrs.				
2	Low Temperature Storage	Keep in -30°C $\pm$ 5°C 96 hrs Surrounding temperature, then storage at normal condition 4hrs.				
3	High Temperature / High Humidity Storage Test	Keep in 50 $^\circ\!\!\!C$ / 90% R.H duration for 96 hrs Surrounding temperature, then storage at normal condition 4hrs. (Excluding the polarizer)				
4	Temperature Cycling Storage Test	$\begin{array}{ccccc} -20^{\circ}C \rightarrow & +25^{\circ}C \rightarrow & 70^{\circ}C \rightarrow & +25^{\circ}C \\ (30 \underline{\text{mins}}) & (5 \underline{\text{mins}}) & (30 \underline{\text{mins}}) & (5 \underline{\text{mins}}) \\ & 10 \text{ Cycle} \\ \end{array}$ Surrounding temperature, then storage at normal condition 4hrs.				
		Air Discharge: Apply 2 KV with 5 times Discharge for each polarity +/-	Contact Discharge: Apply 250 V with 5 times discharge for each polarity +/-			
5	ESD Test	1. Temperature ambiance : $15^{\circ}C \sim 35^{\circ}C$ 2. Humidity relative : $30\% \sim 60\%$ 3. Energy Storage Capacitance( Cs + Cd ) : $150pF\pm10\%$ 4. Discharge Resistance(Rd) : $330\Omega\pm10\%$ 5. Discharge, mode of operation :Single Discharge (time between successive discharges at least 1 sec)(Tolerance if the output voltage indication : $\pm5\%$ )				
6	Vibration Test (Packaged)	<ol> <li>Sine wave 10~55 Hz frequency (1 min/sweep)</li> <li>The amplitude of vibration :1.5 mm</li> <li>Each direction (X ∖ Y ∖ Z) duration for 2 Hrs</li> </ol>				
(7)	Drop Test (Packaged)	Packing Weight (Kg) 0 ~ 45.4 45.4 ~ 90.8 90.8 ~ 454 Over 454	Drop Height (cm) 122 76 61 46			
		S sides each 1time				



### 11. Inspection Standard

#### 11.1. QUALITY :

THE QUALITY OF GOODS SUPPLIED TO PURCHASER SHALL COME UP TO THE FOLLOWING STANDARD.

#### **11.1.1. INSPECTIONTOOLS AND INSTRUMENTS**

Vernier calipers, film scales, multimeter, magnifying eyepiece, ND5%, luminance meter and so on.

#### 11.1.2. THE METHOD OF PRESERVING GOODS

AFTER DELIVERY OF GOODS FROM AMSON TO PURCHASER. PURCHASER SHALL CONTROL THE LCM AT -10 TO 40 ,AND IT MIGHT BE DESIRABLE TO KEEP AT THE NORMAL ROOM TEMPERATURE AND HUMIDITY UNTIL INCOMING INSPECTION OR THROWING INTO PROCESS LINE.

#### **11.1.3. INCOMING INSPECTION**

(A) THE METHOD OF INSPECTION

IF PURCHASER MAKE AN INCOMING INSPECTION , A SAMPLING PLAN SHALL BE APPLIED ON THE CONDITION THAT QUALITY OF ONE DELIVERY SHALL BE REGARDED AS ONE LOT.

#### (B) THE STANDARD OF QUALITY

ISO-2859-1 (SAME AS MIL-STD-105E ) ,LEVEL:

, ·
AQL(%)
0.4 %
0.65 %
1.5 %

EVERY ITEM SHALL BE INSPECTED ACCORDING TO THE CLASS.

#### (C) MEASURE

IF AS THE RESULT OF ABOVE RECEIVING INSPECTION, A LOT OUT IS DISCOVERED. PURCHASER SHALL BE INFORM SELLER OF IT WITHIN SEVEN DAYS. BUT FIRST SHIPMENT WITHIN FOURTEEN DAYS.

#### **11.1.4. WARRANTY POLICY**

AMSON WILL PROVIDE ONE-YEAR WARRANTY FOR THE PRODUCTS ONLY IF UNDER SPECIFICATION OPERATING CONDITIONS. AMSON WILL REPLACE NEW PRODUCTS FOR THESE DEFECT PRODUCTS WHICH UNDER WARRANTY PERIOD AND BELONG TO THE RESPONSIBILITY OF AMSON.

#### **11.2. CHECKING CONDITION**

- **11.2.1.**CHECKING DIRECTION SHALL BE IN THE 45 DEGREE AREA TO FACE THE SAMPLE.
- **11.2.2.** CHECKER SHALL SEE OVER 300±25 mm. WITH BARE EYES FAR FROM SAMPLE
- 11.2.3.Ambient Illumination:


0~30 Lux for functional inspection

500 ~ 1200 Lux for external appearance inspection.

 $\rightarrow$ 

11.2.4. TEST AREA:

**11.2.5.** Inspection should be carried out with rope electrostatic ring and static finger cover (both hands except small fingers must be worn)

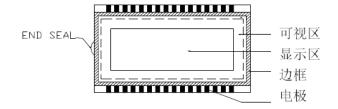

**11.2.6.** The inspector may make a visual inspection or a comparative examination with a film



ruler and a magnifying eyepiece. Individual defects shall be determined according to the limited samples.

**11.2.7.** Functional testing uses electrical testing fixtures or test fixtures required by customers.

**11.2.8.** the ion fan should be used when testing.

## 11.2.9. the principle of judgment

11.3.1 If the defect outside the visual area does not affect the assembly and display,

it will be judged as a good product.

11.3.2 Poor definitionPixel:A combination of three sub-pixels(Red + Green + Blue).

### Dot:

Any of the sub-pixels (Red or Green or Blue).

#### Bright and dark dots:

A point pixel (sub-pixel: R, G, B pixels) is lit or turned off during the display function test. **Highlights**:

Usually considered to be shown on a black screen.

#### Dark spots:

They are generally considered to be shown on R, G, B solid colors or white images. **Neighborhood**:

Two or three adjacent point pixels (dot: sub-pixel) connected together (R, G or G, B or B, R or RGB).



## 11.3. INSPECTION PLAN:

CLASS	ITEM	JUDGEMENT	CLASS
PACKING &	1. OUTSIDE AND INSIDE PACKAGE	"MODEL NO." , "LOT NO." AND "QUANTITY" SHOULD INDICATE ON THE PACKAGE.	Minor
INDICATE	2. MODEL MIXED AND QUANTITY	OTHER MODEL MIXEDREJECTED	Critical
	3. PRODUCT INDICATION	"MODEL NO." SHOULD INDICATE ON THE PRODUCT	Major
ASSEMBLY	4. DIMENSION, LCD GLASS SCRATCH AND SCRIBE DEFECT.	ACCORDING TO SPECIFICATION OR DRAWING.	Major
	5. VIEWING AREA	POLARIZER EDGE OR LCD'S SEALING LINE IS VISABLE IN THE VIEWING AREA REJECTED	Minor
	6. BLEMISH V BLACK SPOT V WHITE SPOT IN THE LCD AND LCD GLASS CRACKS	ACCORDING TO STANDARD OF VISUAL INSPECTION(INSIDE VIEWING AREA)	Minor
APPEARANCE	7. BLEMISH - BLACK SPOT ACCORDING TO STANDARD OF VISUAL WHITE SPOT AND SCRATCH INSPECTION(INSIDE VIEWING AREA) ON THE POLARIZER		Minor
	8. BUBBLE IN POLARIZER	ACCORDING TO STANDARD OF VISUAL INSPECTION(INSIDE VIEWING AREA)	Minor
	9. LCD'S RAINBOW COLOR	STRONG DEVIATION COLOR (OR NEWTON RING) OF LCDREJECTED. OR ACCORDING TO LIMITED SAMPLE (IF NEEDED, AND INSIDE VIEWING AREA)	Minor
	10. ELECTRICAL AND OPTICAL CHARACTERISTICS ( CONTRAST, VOP, CHROMATICITY ETC )	ACCORDING TO SPECIFICATION OR DRAWING . (INSIDE VIEWING AREA )	Critical
ELECTRICAL	11.MISSING LINE	MISSING DOT, LINE, CHARACTER REJECTED	Critical
	12.SHORT CIRCUIT- WRONG PATTERN DISPLAY	NO DISPLAY VRONG PATTERN DISPLAY CURRENT CONSUMPTION OUT OF SPECIFICATION REJECTED	Critical
	13. DOT DEFECT (FOR COLOR AND TFT)		Minor



## AM-1280800-1011

2019-04-01

NO.	CLASS	ITEM	JUDGEMENT				
		(A) ROUND TYPE: unit : m					
				CEPTABLE Q'TY			
			Φ ≤ 0.15	Distance≥1mm			
			0.15 < Φ ≦ 0.4	3 (Distance>15mm)			
		BLACK AND WHITE SPOT FOREIGN MATERIEL	0.4 < D	0			
11 4 1	MINOR	DUST IN THE CELL	NOTE: $\Phi = (\text{LENGTH+WIDTH})/2$				
		BLEMISH	(B) LINEAR TYPE:	unit : mm.			
		SCRATCH	LENGTH WIDTH	ACCEPTABLE Q'TY			
			W ≦0				
				0.05 3 (Distance>15mm)			
			0.05 < W	FOLLOW ROUND TYPE			
$\vdash$							
			DIAMETER				
		BUBBLE IN POLARIZER	DIAMETER $\Phi \leq 0.2$	ACCEPTABLE Q'TY Distance>1mm			
1142	MINOR		$0.2 < \Phi \leq 0.5$	3 (Distance>15mm)			
	WINOR		0.2 < Φ ≦ 0.5				
			0.5 4 4	0			
			Items	ACC. Q'TY			
		Dot Defect	Bright dot	N≦2 (Distance≥15mm)			
			Dark dot	N≦3 (Distance≥15mm)			
			Pixel Define : Pixel				
				D			
			R G	В			
	MINOR						
11.4.3	MINOR		◆ Dot → ◆ Dot → Oot → Note 1: The definition of dot: The size of a defective dot over				
			1/2 of whole dot is regarde				
				sible by 6% ND filter N≦5			
			Note 2: Bright dot: Dots appear brig	laying under black pattern.			
			Note 3: Dark dot: Dots appear dark				
			which LCD panel is display	-			
			,blue pattern.				
$\vdash$							
		Mura	Not visible thriugh 5% ND filter	in 50% gray or judge			
11.4.4	MINOR		by limit sample if necessary				
			1				



## AM-1280800-1011

Version: A

2019-04-01

NO.	CLASS	ITEM	JUDGEMEN	T
11.4.4	MINOR	LCD GLASS CHIPPING	F - I	Y > S Reject
11.4.5	MINOR	LCD GLASS CHIPPING	S X S	X or Y > S Reject
11.4.6	MAJOR	LCD GLASS GLASS CRACK	T Y	Y > (1/2) T Reject
11.4.7	MAJOR	LCD GLASS SCRIBE DEFECT	$A_{\frac{1}{7} \vdash a^{-1}}^{\underline{k}} \xrightarrow{L \longrightarrow A_{\frac{1}{7}}} B$	<ol> <li>a&gt; L/3, A&gt;1.5mm. Reject</li> <li>B: ACCORDING TO DIMENSION</li> </ol>
11.4.8	MINOR	LCD GLASS CHIPPING ( ON THE TERMINAL AREA )	T	$\Phi = (x+y)/2 > 2.5 \text{ mm}$ Reject
11.4.9	MINOR	LCD GLASS CHIPPING ( ON THE TERMINAL SURFACE )	TZX	Y > (1/3) T Reject
11.4.10	MINOR	LCD GLASS CHIPPING	X Y Z	Y > T Reject



## **12. Handling Precautions**

### 12.1 Mounting method

The LCD panel of AMSON TFT module consists of two thin glass plates with polarizes which easily be damaged. And since the module in so constructed as to be fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be needed when handling the LCD modules.

#### 12.2 Caution of LCD handling and cleaning

When cleaning the display surface, Use soft cloth with solvent

[Recommended below] and wipe lightly

- Isopropyl alcohol
- Ethyl alcohol

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Aromatics

Do not wipe ITO pad area with the dry or hard materials that will damage the ITO patterns Do not use the following solvent on the pad or prevent it from being contaminated:

- Soldering flux
- Chlorine (CI) , Sulfur (S)

If goods were sent without being silicon coated on the pad, ITO patterns could be damaged due to the corrosion as time goes on.

If ITO corrosion happen by miss-handling or using some materials such as Chlorine (CI), Sulfur (S) from customer, Responsibility is on customer.

#### 12.3 Caution against static charge

The LCD module use C-MOS LSI drivers, so we recommended that you:

Connect any unused input terminal to power or ground, do not input any signals before power is turned on, and ground your body, work/assembly areas, and assembly equipment to protect against static electricity.

#### 12.4 packing

- Module employs LCD elements and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

#### 12.5 Caution for operation

- It is an indispensable condition to drive LCD's within the specified voltage limit since the higher voltage then the limit cause the shorter LCD life.
- An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current drive should be avoided.
- Response time will be extremely delayed at lower temperature then the operating temperature range and on the other hand at higher temperature LCD's how dark color in them. However those phenomena do not mean malfunction or out of order with LCD's, which will come back in the specified operation temperature.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- Slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.

Usage under the maximum operating temperature, 50%Rh or less is required.



#### 12.6 storing

In the case of storing for a long period of time for instance, for years for the purpose or replacement use, the following ways are recommended.

- Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light's keeping the storage temperature range.
- Storing with no touch on polarizer surface by the anything else.
   [It is recommended to store them as they have been contained in the inner container at the time of delivery from us.

#### 12.7 Safety

- It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

#### **13. Precaution for Use**

#### 13.1

A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

#### 13.2

On the following occasions, the handing of problem should be decided through discussion and agreement between responsible of the both parties.

- When a question is arisen in this specification.
- When a new problem is arisen this is not specified in this specification.
- When an inspection specifications change or operating condition change in customer is reported to AMSON TFT and some problem is arisen in this specification due to the change.
- When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

## 14. Packing Method TBD