













- ► PCB Side View
- ▶ 0602SV (1606) 1.2t
- ► Red (620nm)

NOR43S44SV







**FEATURES:** 

Package: Side View PCB SMT Package

Forward Current: 20mAForward Voltage (typ.): 2.0V

Luminous Intensity (typ.): 400mcd@20mA

• Colour: Red

Wavelength: 620nmViewing angle: 140°

• Materials:

Die: AlGaInP/GaAs

Resin: Epoxy (Water Clear)
Operating Temperature: -40~+80°C
Storage Temperature: -40~+85°C

Grouping parameters:

Forward voltage

Luminous intensity

Dominant Wavelength

Soldering methods: Reflow

Preconditioning: acc. to JEDEC Level 3

Packing: 8mm tape with max. 4000/reel, ø180mm (7")

0602SV 1.2t Series

Side View

#### **APPLICATIONS:**

- Backlighting
- Indication Light
- Side view Light Strip
- Switch light
- Dashboard
- Keyboard



## **CHARACTERISTICS:**

# Absolute Maximum Characteristics (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Forward Current	I <sub>F</sub>	30	mA
Peak Forward Current Duty 1/8@1KHz	I <sub>FP</sub>	125	mA
Reverse Voltage	V <sub>R</sub>	5	V
Reverse Current	I <sub>R</sub>	10	μΑ
Power Dissipation	P <sub>D</sub>	75	mW
Operating Temperature	T <sub>OPR</sub>	-40~+80	°C
Storage Temperature	$T_{STG}$	-40~+85	°C

## Electrical & Optical Characteristics (Ta=25°C)


Parameter Sym		Values			Unit	Test
Parameter Sym	Symbol	Min.	Тур.	Max.	Unit	Condition
Forward Voltage	$V_{F}$	1.7	2.0	2.5	V	I <sub>F</sub> =20mA
Luminous Intensity	I <sub>V</sub>	250	400	800	mcd	I <sub>F</sub> =20mA
Dominant Wavelength	λD	615	620	630	nm	I <sub>F</sub> =20mA
Peak Wavelength	$\lambda_{ extsf{P}}$		630		nm	I <sub>F</sub> =20mA
Spectral Line Half Bandwidth	Δλ		18		nm	I <sub>F</sub> =20mA
Viewing Angle	2θ <sub>1/2</sub>		140		deg	I <sub>F</sub> =20mA

<sup>1.</sup> Luminous intensity (I $_{V}$ ) ±15%, Forward Voltage (V $_{F}$ ) ±0.1V




## **OUTLINE DIMENSION:**

## Package Dimension:

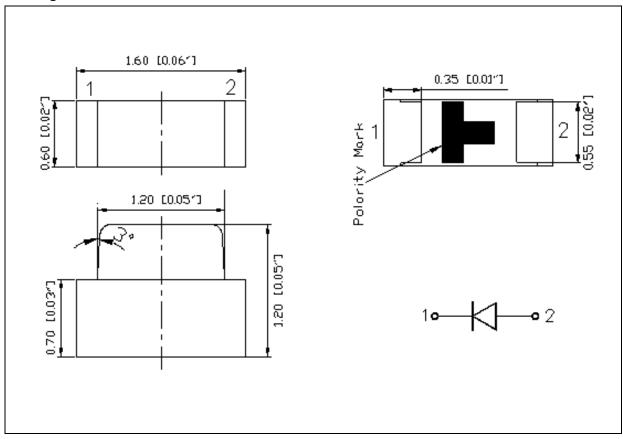

- 1. All dimensions are in millimetre (mm).
- 2. Tolerance ±0.2mm, unless otherwise noted.

## **Recommended Soldering Pad Dimension:**

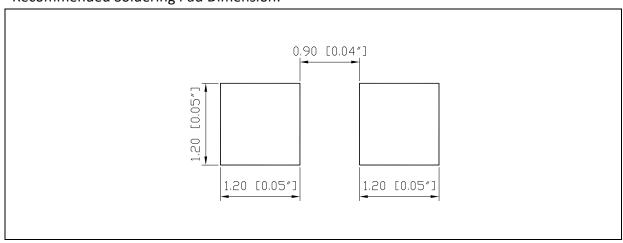

- 1. Dimensions are in millimetre (mm).
- 2. Tolerance ±0.1mm with angle tolerance ±0.5°.



## **BINNING GROUPS:**

## Forward Voltage Classifications (I<sub>F</sub> = 20mA):

Code	Min.	Max.	Unit
	1.7	2.5	V

## Luminous Intensity Classifications (I<sub>F</sub> = 20mA):

Code	Min.	Max.	Unit
N	250	320	
0	320	400	
Р	400	500	mcd
Q	500	630	
R	630	800	

# Dominant Wavelength Classifications (I<sub>F</sub> = 20mA):


Code	Min.	Max.	Unit
S	615	620	
t	620	625	nm
u	625	630	


## Example Group Name on Label:

• □ Pt20 = □ (1.7~2.5V) ► P (400~500mcd) ► t (620~625nm) ► 20 (IF=20mA)



## **ELECTRO-OPTICAL CHARACTERISTICS:**

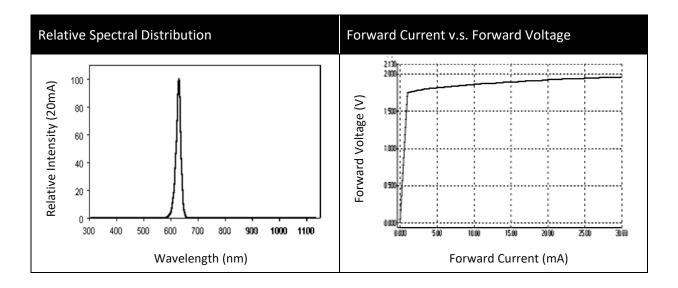


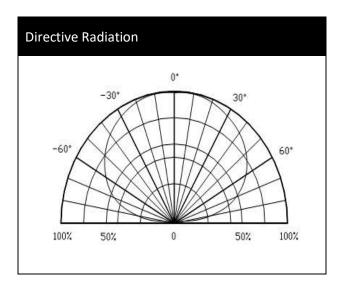



#### **RECOMMENDED SOLDERING PROFILE:**

#### Lead-free Solder:

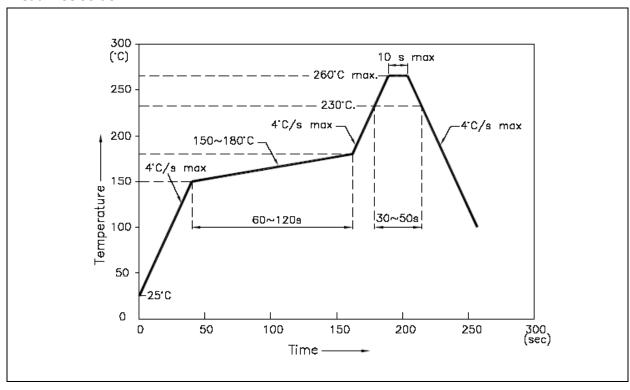


#### Note:

- 1. Recommend soldering temperature is 245°C. The maximum soldering temperature should be limited to 260°C.
- 2. Maximum reflow soldering: 2 times.
- 3. Before, during, and after soldering, should not apply stress on the components and PCB board.



## **PACKING SPECIFICATION:**

#### Reel Dimension:

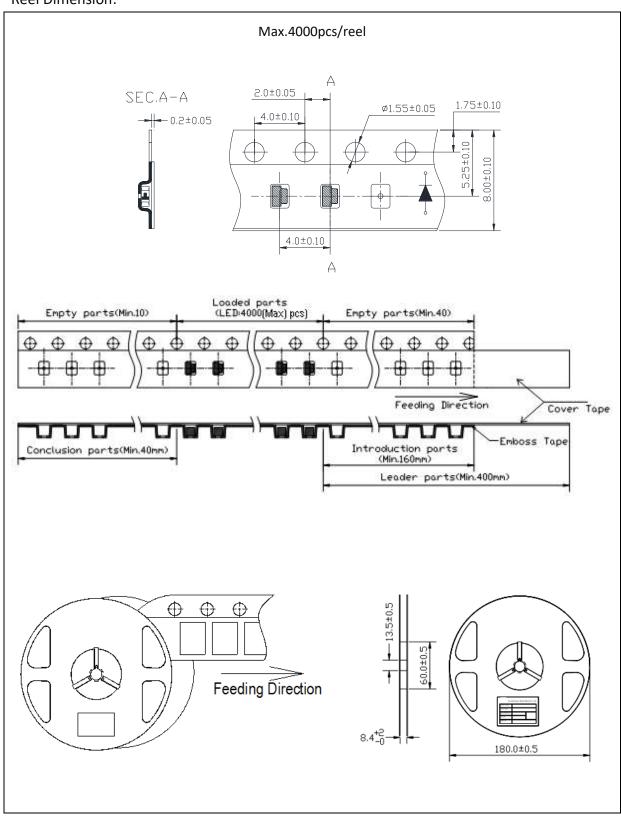



#### **PRECAUTIONS OF USE:**

#### Storage:

It is recommended to store the products in the following conditions:

- Humidity: 60% R.H. Max.
- Temperature: 5°C~30°C (41°F ~86°F).

Shelf life in sealed bag: 12 months at 5°C~30°C and <60% R.H.

Once the package is opened, the products should be used within a week. Otherwise, they should be kept in a damp-proof box with descanting agent <10% R.H. and apply baking before use.


#### Baking:

It is recommended to bake the LED before soldering if the pack has been unsealed for longer than 24hrs. The suggested baking conditions are as followings:

60±3°C x 36hrs and <5%RH, taped / reel package.</li>

It's normal to see slight color fading of carrier (light yellow) after baking in process.

#### **Testing Circuit:**

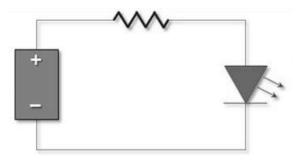

Must apply resistor(s) for protection (over current proof).

#### Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED carrier / package. Avoid putting any stress force directly on to the LED lens.

#### ESD (Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrosatic glove is recommended when handing the LED all time. All devices, equipment, machinery, work tables, and storage racks must be properly grounded.

In the events of manual working in process, make sure the devices are well protected from ESD at any time.



# **REVISION RECORD:**

Version	Date	Summary of Revision
A1.0	08/12/2017	Datasheet set-up.
A1.1	10/02/2022	Update bin table.